




Power Triple Lock

TE Internal #: 1-1971775-5

Rectangular Power Connectors, Housing, Cap, Wire-to-Wire, 10 Position, 6 mm [.236 in] Centerline, Wire & Cable, UL 94V-0, Power Triple Lock

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > Standard Temperature Caps | POWER TRIPLE LOCK

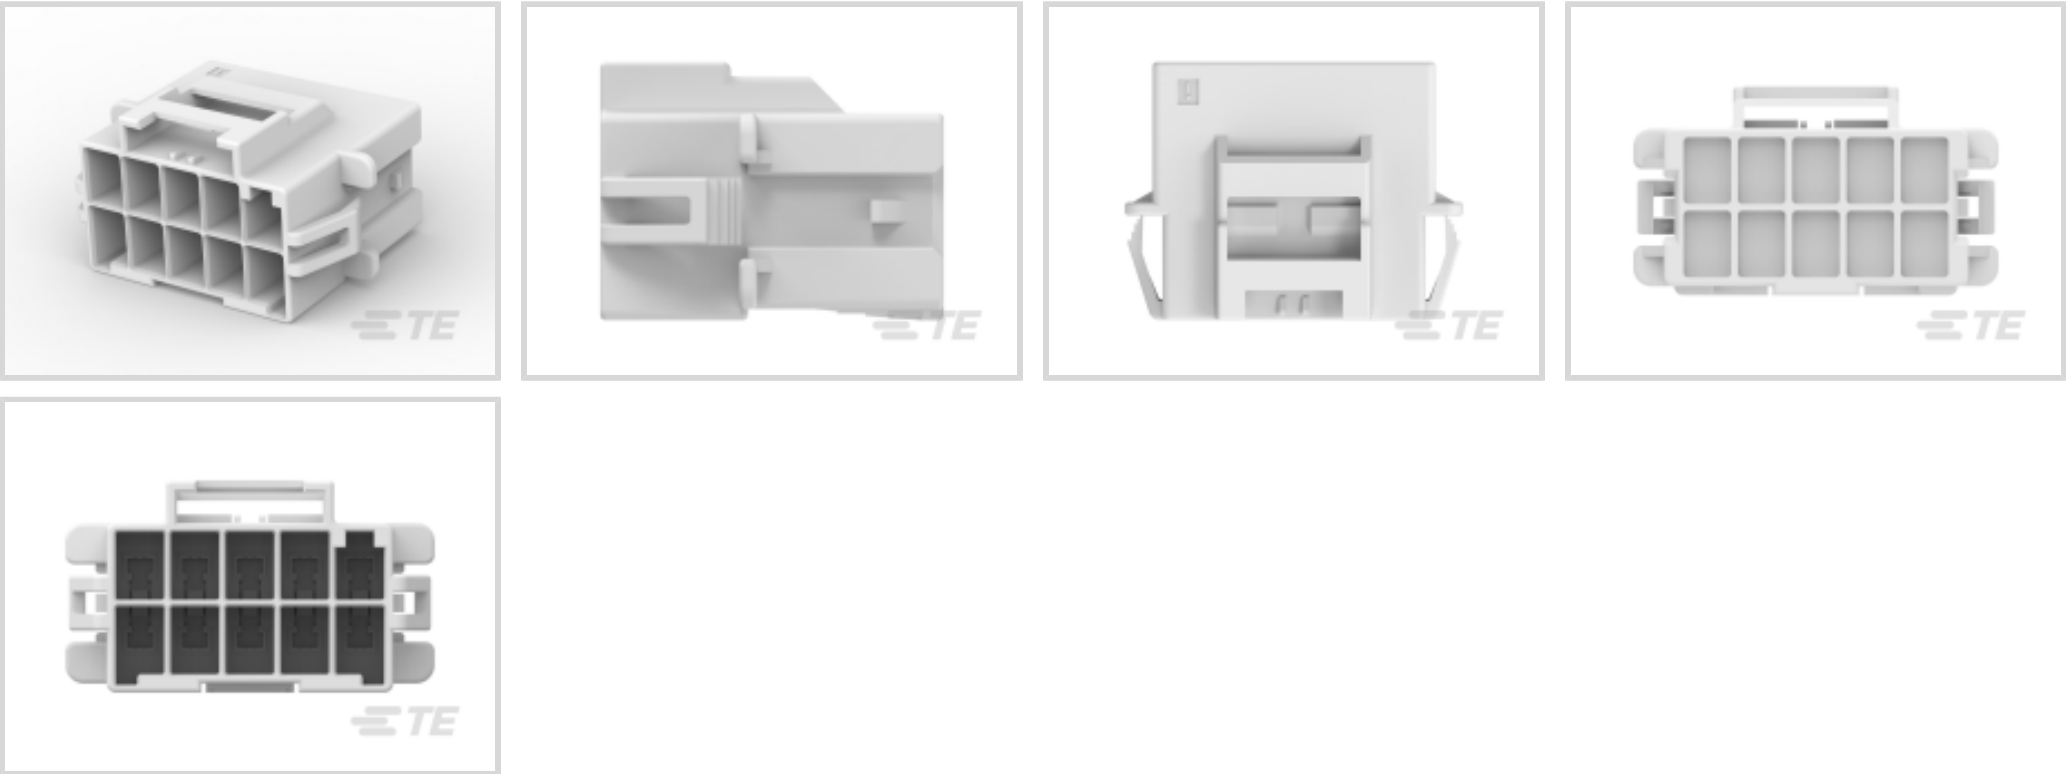

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Cap**

Connector System: **Wire-to-Wire**

Number of Positions: **10**

Centerline (Pitch): **6 mm [.236 in]**

[All Standard Temperature Caps | POWER TRIPLE LOCK \(40\)](#)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Cap
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	10
Number of Power Positions	10
Number of Rows	2

Electrical Characteristics

Operating Voltage	600 VDC
-------------------	---------

Body Features

--



Cable Exit Angle	180°
Connector & Keying Code	A

Contact Features

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Tab

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Panel Mount Feature	With
Panel Mount Feature Type	Latches
Connector Mounting Type	Panel Mount

Housing Features

Centerline (Pitch)	6 mm [.236 in]
Housing Color	Natural
Housing Material	PBT GF

Dimensions

Panel Thickness (Recommended)	1 – 2 mm [.039 – .079 in]
Connector Height	23.05 mm
Row-to-Row Spacing	8.1 mm [.319 in]

Usage Conditions

Operating Temperature Range	-55 – 105 °C [-67 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Identification Marking

Circuit Identification Feature	With
--------------------------------	------

Industry Standards

UL Rating	Recognized
Agency/Standard	UL
Approved Standards	UL E28476
UL Flammability Rating	UL 94V-0



Glow Wire Rating	Standard Part - Not Glow Wire
------------------	-------------------------------

Packaging Features

Packaging Method	Carton
------------------	--------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1971778-5
PTL TPA HIGH TEMP 2 x 5 BLACK



TE Part # CAT-P87074-T111
Tab Contact — POWER TRIPLE LOCK



TE Part # 1452426-1
EXTRACTION TOOL



TE Part # 1971789-1
CPA





TE Part # 1-1971776-5
PTL 2X5 PLUG HSG STD TEMP KEY A NAT



TE Part # 5-2232264-5
PTL 2X5 CAP PANEL MT GLW WIRE KEY A DGR




TE Part # 1-2232356-5
PTL 3X5 CAP PANEL MT HOT WIRE KEY A BLK

Also in the Series | Power Triple Lock



Insertion & Extraction Tools(1)

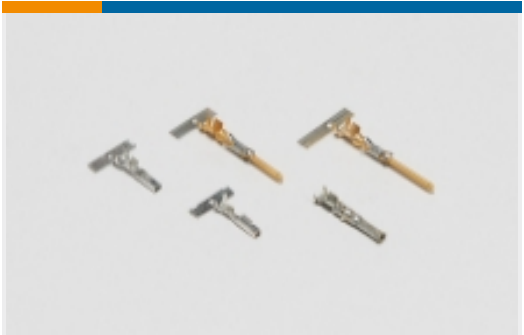

Power Contacts(30)



Rectangular Connector Locking(12)



Rectangular Power Connectors(300)

Customers Also Bought



TE Part #T4113001051-000
M12,MALE,RA,A CODE,5P,PG7,GOLD



TE Part #211401-1
RECEPT,SZ 13-7,CPC



TE Part #1-1971773-4
PTL 1X4 PLUG HSG STD TEMP KEY A NAT



TE Part #1-1971772-4
Standard Temperature Caps | POWER TRIPLE LOCK



TE Part #172501-1
MIC MARK-2 PLUG HSG 21P



TE Part #1971789-1
CPA



TE Part #62336-1
110 FASTON FLAG REC 22-18 AWG TPBR



TE Part #1971779-2
PTL RECEPTACLE CONTACT, 12 AWG



TE Part #626038-2
RING TONGUE 4-6 MM2 0.79 X 16.18 TPBR



Documents

Product Drawings

PTL 2X5 CAP PANEL MT STD TEMP KEY A NAT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-1971775-5_F.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1971775-5_F.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1971775-5_F.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

1-1773734-9 TE Power Triple Lock Quick Reference Guide - German

German

9-1773465-1Power Triple Lock QRG

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English