


# PolarP™ Power MOSFET


## IXTR16P60P

$V_{DSS}$  = - 600V  
 $I_{D25}$  = - 10A  
 $R_{DS(on)}$   $\leq$  790mΩ

P-Channel Enhancement Mode  
Avalanche Rated



ISOPLUS247 (IXTR)



G = Gate      D = Drain  
 S = Source

Symbol	Test Conditions	Maximum Ratings		
$V_{DSS}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$	- 600		V
$V_{DGR}$	$T_J = 25^\circ\text{C}$ to $150^\circ\text{C}$ , $R_{GS} = 1\text{M}\Omega$	- 600		V
$V_{GSS}$	Continuous	$\pm 20$		V
$V_{GSM}$	Transient	$\pm 30$		V
$I_{D25}$	$T_C = 25^\circ\text{C}$	- 10		A
$I_{DM}$	$T_C = 25^\circ\text{C}$ , pulse width limited by $T_{JM}$	- 48		A
$I_{AR}$	$T_C = 25^\circ\text{C}$	- 16		A
$E_{AS}$	$T_C = 25^\circ\text{C}$	2.5		J
$dV/dt$	$I_s \leq I_{DM}$ , $V_{DD} \leq V_{DSS}$ , $T_J \leq 150^\circ\text{C}$	10		V/ns
$P_D$	$T_C = 25^\circ\text{C}$	190		W
$T_J$		-55 ... +150		$^\circ\text{C}$
$T_{JM}$		150		$^\circ\text{C}$
$T_{stg}$		-55 ... +150		$^\circ\text{C}$
$T_L$	1.6mm (0.062 in.) from case for 10s	300		$^\circ\text{C}$
$T_{SOLD}$	Plastic body for 10s	260		$^\circ\text{C}$
$V_{ISOL}$	50/60 Hz, RMS	t = 1min	2500	V~
	$I_{ISOL} \leq 1\text{mA}$	t = 1s	3000	V~
$M_d$	Mounting force	20..120 / 4.5..27		N/lb.
Weight		5		g

Symbol	Test Conditions ( $T_J = 25^\circ\text{C}$ , unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
$BV_{DSS}$	$V_{GS} = 0\text{V}$ , $I_D = - 250\mu\text{A}$	- 600		V
$V_{GS(th)}$	$V_{DS} = V_{GS}$ , $I_D = - 250\mu\text{A}$	- 2.5		- 4.5 V
$I_{GSS}$	$V_{GS} = \pm 20\text{V}$ , $V_{DS} = 0\text{V}$		$\pm 100$ nA	
$I_{DSS}$	$V_{DS} = V_{DSS}$ $V_{GS} = 0\text{V}$			- 25 $\mu\text{A}$
		$T_J = 125^\circ\text{C}$		- 200 $\mu\text{A}$
$R_{DS(on)}$	$V_{GS} = - 10\text{V}$ , $I_D = - 8\text{A}$ , Note 1		790	mΩ

### Features

- Silicon chip on Direct-Copper Bond (DCB) substrate
  - UL recognized package
  - Isolated mounting surface
  - 2500V electrical isolation
- Avalanche rated
- The rugged PolarP™ process
- Low  $Q_G$
- Low Drain-to-Tab capacitance
- Low package inductance
  - easy to drive and to protect

### Applications

- High side switching
- Push-pull amplifiers
- DC Choppers
- Automatic test equipment
- Load-Switch Application
- Fuel Injection Systems


Symbol	Test Conditions (T <sub>J</sub> = 25°C, unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
<b>I<sub>fs</sub></b>	V <sub>DS</sub> = -10V, I <sub>D</sub> = -8A, Note 1	11	18	S
<b>C<sub>iss</sub></b>		5120		pF
<b>C<sub>oss</sub></b>	V <sub>GS</sub> = 0V, V <sub>DS</sub> = -25V, f = 1MHz	445		pF
<b>C<sub>rss</sub></b>		60		pF
<b>t<sub>d(on)</sub></b>		29		ns
<b>t<sub>r</sub></b>		25		ns
<b>t<sub>d(off)</sub></b>	V <sub>GS</sub> = -10V, V <sub>DS</sub> = 0.5 • V <sub>DSS</sub> , I <sub>D</sub> = -8A	60		ns
<b>t<sub>f</sub></b>	R <sub>G</sub> = 3Ω (External)	38		ns
<b>Q<sub>g(on)</sub></b>		92		nC
<b>Q<sub>gs</sub></b>	V <sub>GS</sub> = -10V, V <sub>DS</sub> = 0.5 • V <sub>DSS</sub> , I <sub>D</sub> = -8A	27		nC
<b>Q<sub>gd</sub></b>		23		nC
<b>R<sub>thJC</sub></b>			0.66	°C/W
<b>R<sub>thCS</sub></b>		0.15		°C/W

### Source-Drain Diode

Symbol	Test Conditions (T <sub>J</sub> = 25°C, unless otherwise specified)	Characteristic Values		
		Min.	Typ.	Max.
<b>I<sub>s</sub></b>	V <sub>GS</sub> = 0V			- 16 A
<b>I<sub>SM</sub></b>	Repetitive, pulse width limited by T <sub>JM</sub>			- 64 A
<b>V<sub>SD</sub></b>	I <sub>F</sub> = -8A, V <sub>GS</sub> = 0V, Note 1			- 2.8 V
<b>t<sub>rr</sub></b>		440		ns
<b>Q<sub>RM</sub></b>	I <sub>F</sub> = -8A, -di/dt = -150A/μs	7.4		μC
<b>I<sub>RM</sub></b>	V <sub>R</sub> = -100V, V <sub>GS</sub> = 0V	- 33.6		A

Note 1: Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.

### ISOPLUS247 (IXTR) Outline

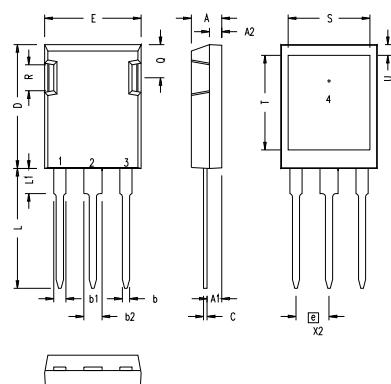

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b1	.075	.084	1.91	2.13
b2	.115	.123	2.92	3.12
C	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
E	.620	.635	15.75	16.13
e	.215 BSC		5.45 BSC	
L	.780	.800	19.81	20.32
L1	.150	.170	3.81	4.32
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83
S	.520	.540	13.21	13.72
T	.620	.640	15.75	16.26
U	.065	.080	1.65	2.03

1 – GATE  
2 – DRAIN (COLLECTOR)  
3 – SOURCE (EMITTER)  
4 – NO CONNECTION

NOTE: This drawing will meet all dimensions requirement of JEDEC outline TO-247AD except screw hole.


### PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from data gathered during objective characterizations of preliminary engineering lots; but also may yet contain some information supplied during a pre-production design evaluation. IXYS reserves the right to change limits, test conditions, and dimensions without notice.


IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065 B1 6,683,344 6,727,585 7,005,734 B2 7,157,338B2 5,017,508 5,063,307 5,381,025 6,259,123 B1 6,534,343 6,710,405 B2 6,759,692 7,063,975 B2 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463 6,771,478 B2 7,071,537


**Fig. 1. Output Characteristics  
@ 25°C**

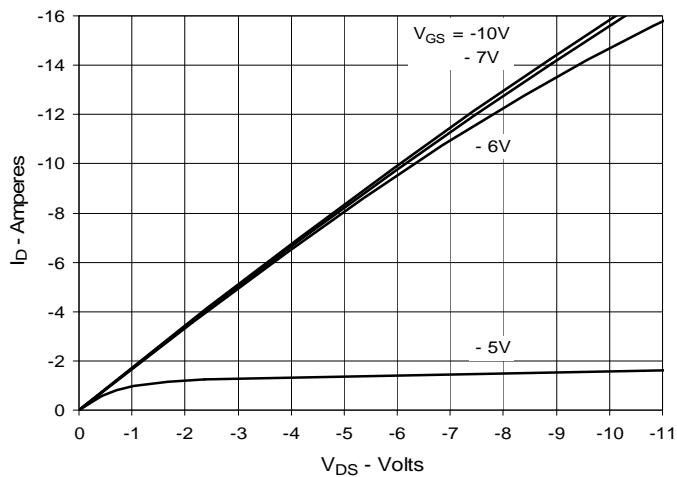


**Fig. 2. Extended Output Characteristics  
@ 25°C**

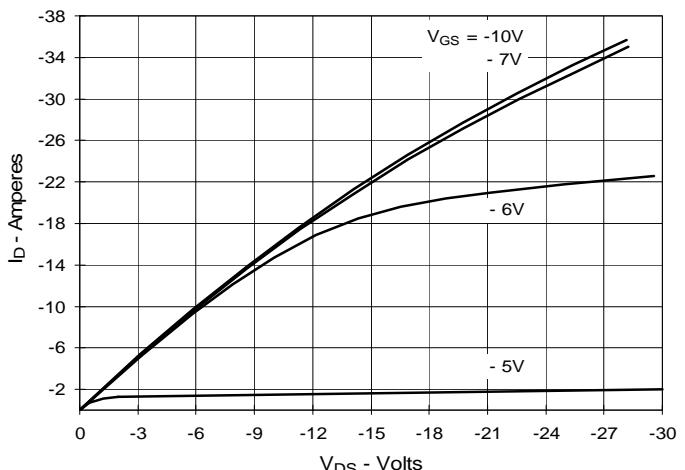


**Fig. 3. Output Characteristics  
@ 125°C**

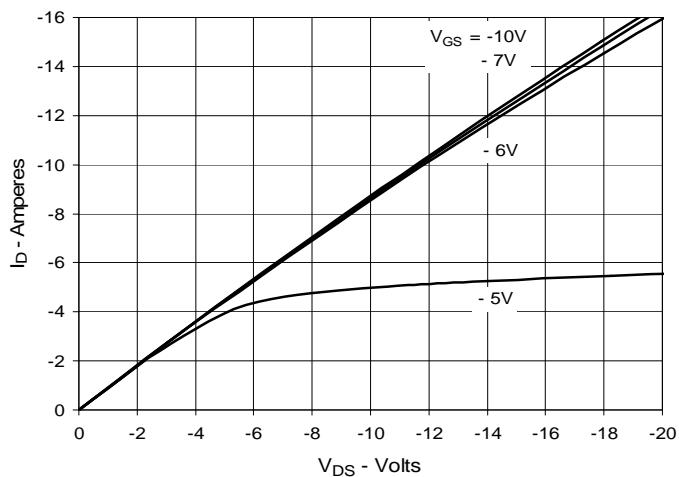


**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = -8A$  vs.  
Junction Temperature**






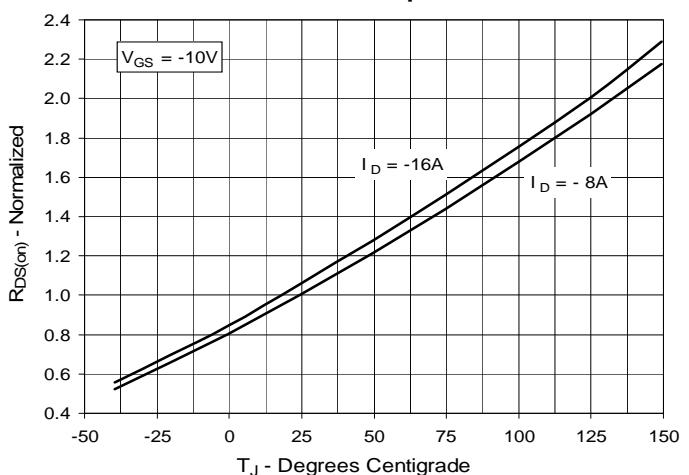


**Fig. 5.  $R_{DS(on)}$  Normalized to  $I_D = -8A$  vs.  
Drain Current**

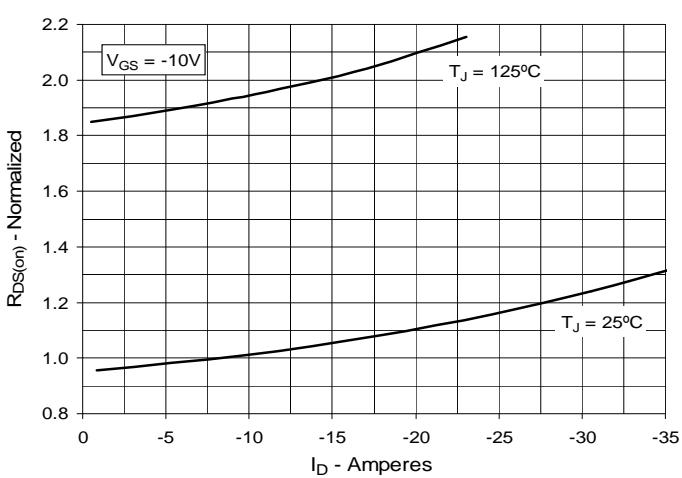

**Fig. 6. Maximum Drain Current vs.  
Case Temperature**

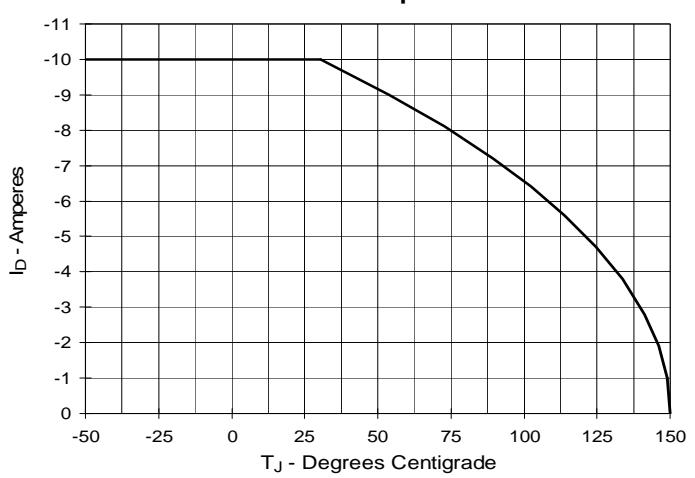

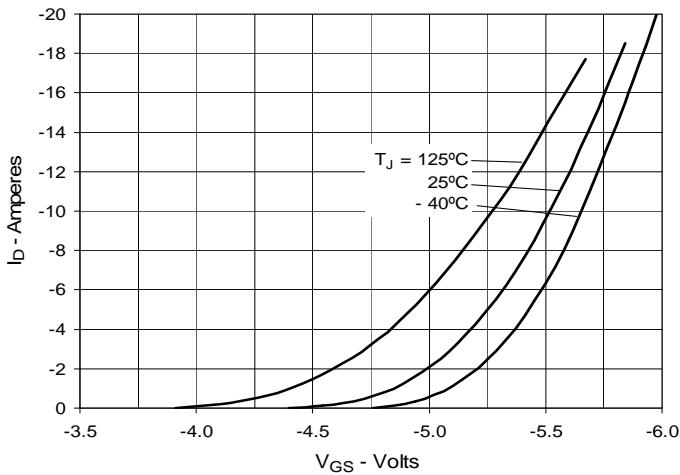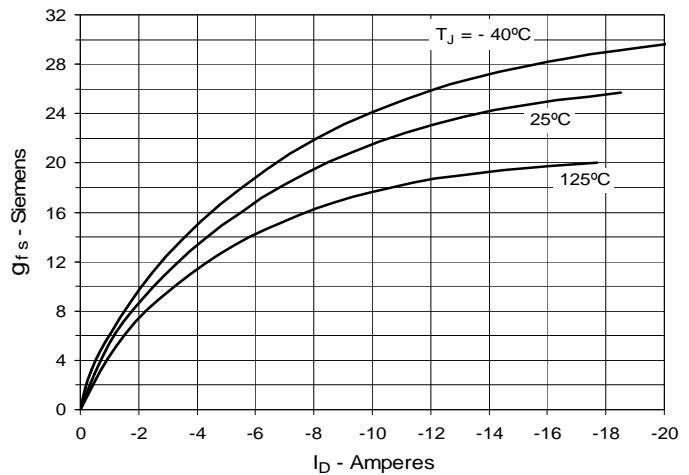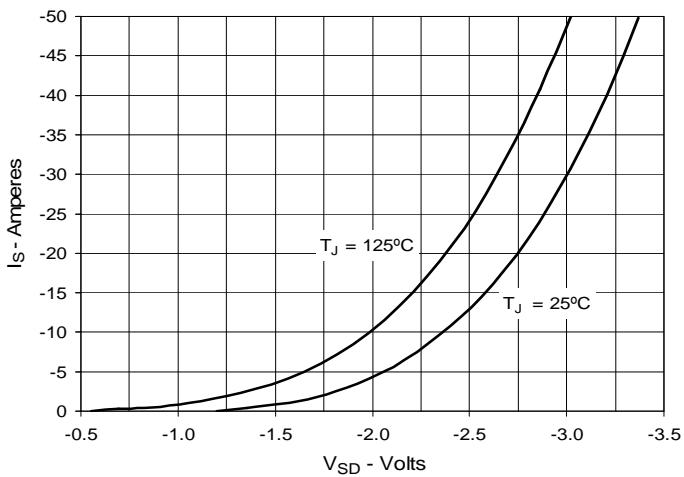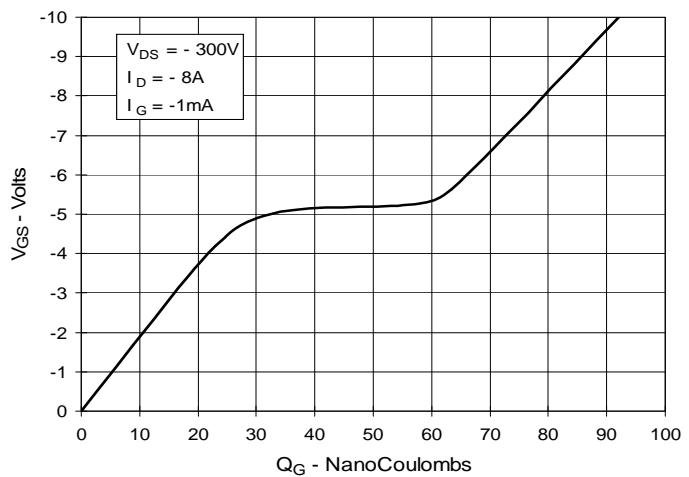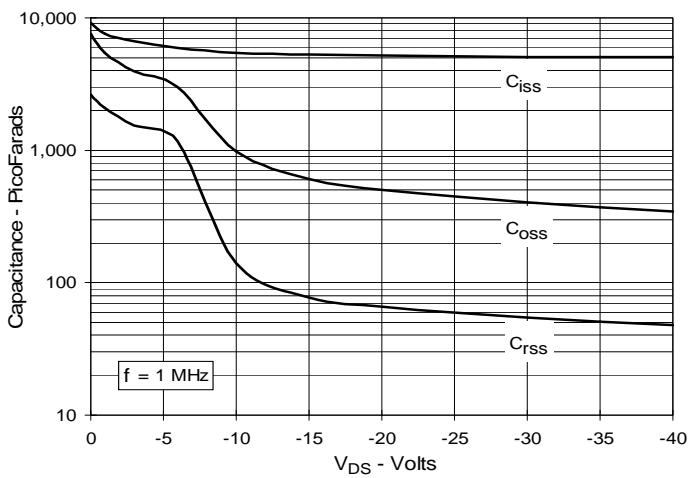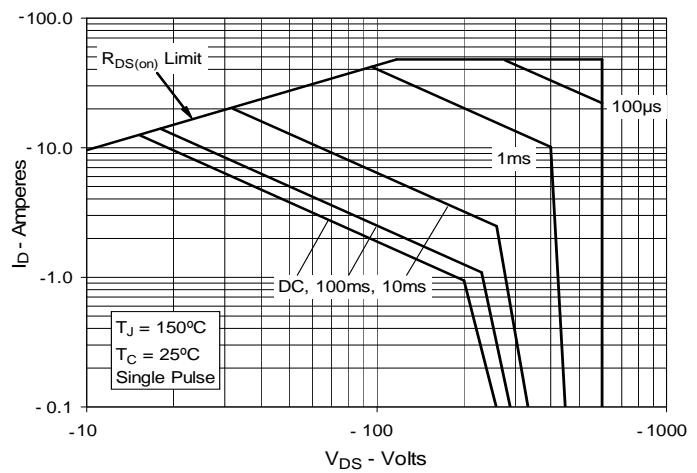**Fig. 7. Input Admittance****Fig. 8. Transconductance****Fig. 9. Forward Voltage Drop of Intrinsic Diode****Fig. 10. Gate Charge****Fig. 11. Capacitance****Fig. 12. Forward-Bias Safe Operating Area**

**Fig. 13. Maximum Transient Thermal Impedance**