### INTEGRATED CIRCUITS

# DATA SHEET

## 74LVT245

3.3V Octal transceiver with direction pin (3-State)

Product specification Supersedes data of 1994 May 20 IC23 Data Handbook





### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### **FEATURES**

- Octal bidirectional bus interface
- 3-State buffers
- Output capability: +64mA/-32mA
- TTL input and output switching levels
- Input and output interface capability to systems at 5V supply
- Bus-hold data inputs eliminate the need for external pull-up resistors to hold unused inputs
- Live insertion/extraction permitted
- Power-up 3-State
- No bus current loading when output is tied to 5V bus
- Latch-up protection exceeds 500mA per JEDEC Std 17
- ESD protection exceeds 2000V per MIL STD 883 Method 3015 and 200V per Machine Model

#### **DESCRIPTION**

The LVT245 is a high-performance BiCMOS product designed for  $V_{CC}$  operation at 3.3V.

This device is an octal transceiver featuring non-inverting 3-State bus compatible outputs in both send and receive directions. The control function implementation minimizes external timing requirements. The device features an Output Enable ( $\overline{OE}$ ) input for easy cascading and a Direction (DIR) input for direction control.


#### **QUICK REFERENCE DATA**

SYMBOL	PARAMETER	CONDITIONS T <sub>amb</sub> = 25°C; GND = 0V	TYPICAL	UNIT
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay An to Bn or Bn to An	$C_L = 50pF;$ $V_{CC} = 3.3V$	2.4	ns
C <sub>IN</sub>	Input capacitance DIR, OE	V <sub>I</sub> = 0V or 3.0V	4	pF
C <sub>I/O</sub>	I/O pin capacitance	Outputs disabled; V <sub>I/O</sub> = 0V or 3.0V	10	pF
I <sub>CCZ</sub>	Total supply current	Outputs disabled; V <sub>CC</sub> = 3.6V	0.13	mA

#### ORDERING INFORMATION

ONDERNING INTO ONINATION				
PACKAGES	TEMPERATURE RANGE	OUTSIDE NORTH AMERICA	NORTH AMERICA	DWG NUMBER
20-Pin Plastic SO	-40°C to +85°C	74LVT245 D	74LVT245 D	SOT163-1
20-Pin Plastic SSOP	-40°C to +85°C	74LVT245 DB	74LVT245 DB	SOT339-1
20-Pin Plastic TSSOP	−40°C to +85°C	74LVT245 PW	74LVT245PW DH	SOT360-1

#### **PIN CONFIGURATION**




#### **PIN DESCRIPTION**

PIN NUMBER	SYMBOL	NAME AND FUNCTION
1	DIR	Direction control input
2, 3, 4, 5, 6, 7, 8, 9	A0 – A7	Data inputs/outputs (A side)
18, 17, 16, 15, 14, 13, 12, 11	B0 – B7	Data inputs/outputs (B side)
19	ŌĒ	Output enable input (active–Low)
10	GND	Ground (0V)
20	V <sub>CC</sub>	Positive supply voltage


### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### LOGIC SYMBOL



#### LOGIC SYMBOL (IEEE/IEC)



#### **FUNCTION TABLE**

INP	UTS	INPUTS/C	OUTPUTS
<del>OE</del> n	DIR	An	Bn
L	L L		Inputs
L	L H		Bn =An
Н	Х	Z	Z

H = High voltage level

L = Low voltage level

X = Don't care

Z = High impedance "Off" state

#### **ABSOLUTE MAXIMUM RATINGS<sup>1,2</sup>**

SYMBOL	PARAMETER	CONDITIONS	RATING	UNIT
V <sub>CC</sub>	DC supply voltage		-0.5 to +4.6	V
I <sub>IK</sub>	DC input diode current	V <sub>I</sub> < 0	-50	mA
VI	DC input voltage <sup>3</sup>		-0.5 to +7.0	V
lok	DC output diode current	V <sub>O</sub> < 0	-50	mA
V <sub>OUT</sub>	DC output voltage <sup>3</sup>	Output in Off or High state	-0.5 to +7.0	V
	DC output ourrent	Output in Low state	128	A
Іоит	DC output current	Output in High state	-64	mA
T <sub>stg</sub>	Storage temperature range		-65 to +150	°C

#### NOTES:

- 1. Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- 2. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability. The maximum junction temperature of this integrated circuit should not exceed 150°C.

3. The input and output negative voltage ratings may be exceeded if the input and output clamp current ratings are observed.

### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### RECOMMENDED OPERATING CONDITIONS

SYMBOL	PARAMETER	LIM	ITS	UNIT	
STWIBOL	FARAMETER	MIN	MAX	ONT	
V <sub>CC</sub>	DC supply voltage	2.7	3.6	V	
V <sub>I</sub>	Input voltage	0	5.5	V	
V <sub>IH</sub>	High-level input voltage	2.0		V	
V <sub>IL</sub>	Input voltage		0.8	V	
I <sub>OH</sub>	High-level output current		-32	mA	
la	Low-level output current		32	mA	
lor	Low-level output current; current duty cycle ≤ 50%; f ≥ 1kHz		64	ША	
Δt/Δν	Input transition rise or fall rate; Outputs enabled		10	ns/V	
T <sub>amb</sub>	Operating free-air temperature range	-40	+85	°C	

#### DC ELECTRICAL CHARACTERISTICS

					LIMITS		
SYMBOL	PARAMETER	TEST CONDITIONS		Temp =	-40°C to -	-85°C	UNIT
					TYP <sup>1</sup>	MAX	
V <sub>IK</sub>	Input clamp voltage	$V_{CC} = 2.7V; I_{IK} = -18mA$		-0.9	-1.2	V	
		$V_{CC} = 2.7 \text{ to } 3.6 \text{V}; I_{OH} = -100 \mu\text{A}$		V <sub>CC</sub> -0.2	V <sub>CC</sub> -0.1		
$V_{OH}$	High-level output voltage	$V_{CC} = 2.7V; I_{OH} = -8mA$		2.4	2.5		V
		$V_{CC} = 3.0V; I_{OH} = -32mA$		2.0	2.2		
		$V_{CC} = 2.7V; I_{OL} = 100\mu A$			0.1	0.2	
		V <sub>CC</sub> = 2.7V; I <sub>OL</sub> = 24mA			0.3	0.5	
$V_{OL}$	Low-level output voltage	level output voltage $V_{CC} = 3.0V; I_{OL} = 16mA$			0.25	0.4	V
		V <sub>CC</sub> = 3.0V; I <sub>OL</sub> = 32mA			0.3	0.5	
		V <sub>CC</sub> = 3.0V; I <sub>OL</sub> = 64mA		0.4	0.55		
		V <sub>CC</sub> = 0 or 3.6V; V <sub>I</sub> = 5.5V	Control pins		1	10	
		$V_{CC} = 3.6V; V_I = V_{CC} \text{ or GND}$	Control pins		±0.1	±1	
II	Input leakage current	V <sub>CC</sub> = 3.6V; V <sub>I</sub> = 5.5V			1	20	μΑ
		$V_{CC} = 3.6V; V_I = V_{CC}$	I/O Data pins <sup>4</sup>		0.1	1	]
		$V_{CC} = 3.6V; V_I = 0$	1		-1	-5	
I <sub>OFF</sub>	Output off current	$V_{CC} = 0V; V_{I} \text{ or } V_{O} = 0 \text{ to } 4.5V$			1	±100	μΑ
		$V_{CC} = 3V; V_{I} = 0.8V$		75	150		
$I_{HOLD}$	Bus Hold current A inputs <sup>5</sup>	$V_{CC} = 3V; V_{I} = 2.0V$		-75	-150		μΑ
		$V_{CC} = 0V \text{ to } 3.6V; V_{CC} = 3.6V$		±500			
I <sub>EX</sub>	Current into an ouptut in the High state when V <sub>O</sub> > V <sub>CC</sub>	$V_O = 5.5V$ ; $V_{CC} = 3.0V$			60	125	μА
I <sub>PU/PD</sub>	Power up/down 3-State output current <sup>3</sup>	$V_{CC} \le 1.2V$ ; $V_O = 0.5V$ to $V_{CC}$ ; $V_I = GNI$ OE/ $\overline{OE} = Don't$ care	O or V <sub>CC</sub> ;		15	±100	μА
I <sub>CCH</sub>		$V_{CC} = 3.6V$ ; Outputs High, $V_I = GND$ or		0.13	0.19		
I <sub>CCL</sub>	Quiescent supply current	$V_{CC} = 3.6V$ ; Outputs Low, $V_I = GND$ or $V_{CC} = 0.00$		3	12	mA	
I <sub>CCZ</sub>		$V_{CC} = 3.6V$ ; Outputs Disabled; $V_I = GNI$	O or $V_{CC}$ , $I_{O} = 0$		0.13	0.19	
Δl <sub>CC</sub>	Additional supply current per input pin <sup>2</sup>	$V_{CC}$ = 3V to 3.6V; One input at $V_{CC}$ -0.6° Other inputs at $V_{CC}$ or GND	V,		0.1	0.2	mA

- All typical values are at V<sub>CC</sub> = 3.3V and T<sub>amb</sub> = 25°C.
  This is the increase in supply current for each input at the specified voltage level other than V<sub>CC</sub> or GND
  This parameter is valid for any V<sub>CC</sub> between 0V and 1.2V with a transition time of up to 10msec. From V<sub>CC</sub> = 1.2V to V<sub>CC</sub> = 3.3V ± 0.3V a transition time of 100 $\mu$ sec is permitted. This parameter is valid for  $T_{amb} = +25$ °C only.
- 4. Unused pins at V<sub>CC</sub> or GND.
- 5. This is the bus hold overdrive current required to force the input to the opposite logic state.

### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### **AC CHARACTERISTICS**

GND = 0V;  $t_R$  =  $t_F$  = 2.5ns;  $C_L$  = 50pF;  $R_L$  = 500 $\Omega$ ;  $T_{amb}$  = -40°C to +85°C.


			LIMITS				
SYMBOL	PARAMETER	WAVEFORM	V <sub>CC</sub> = 3.3V +0.3V		V <sub>CC</sub> = 2.7V	UNIT	
			MIN	TYP <sup>1</sup>	MAX	MAX	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation delay An to Bn or Bn to An	1	1.0 1.0	2.4 2.4	4.0 4.0	4.7 4.6	ns
t <sub>PZH</sub> t <sub>PZL</sub>	Output enable time to High and Low level	2	1.1 1.5	3.3 3.2	5.5 5.5	7.1 6.5	ns
t <sub>PHZ</sub>	Output disable time from High and Low Level	2	2.2 2.0	3.6 3.4	5.9 4.8	6.5 4.8	ns

#### NOTES:


1. All typical values are at  $V_{CC}$  = 3.3V and  $T_{amb}$  = 25°C.

#### **AC WAVEFORMS**

 $V_M = 1.5V$ ,  $V_{IN} = GND$  to 2.7V



Waveform 1. Input (An or Bn) to Output (Bn or An) Propagation Delays

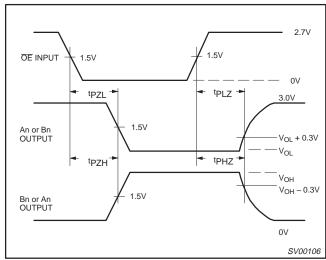


Waveform 2. 3-State Output Enable and Disable Times

### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### **TEST CIRCUIT AND WAVEFORMS**

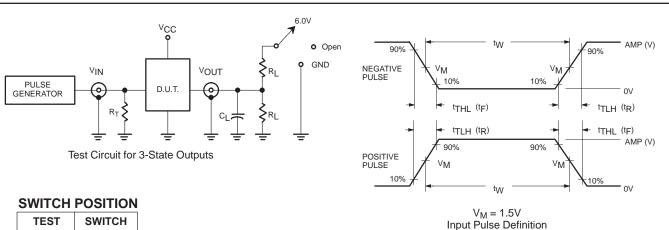

TEST	SWITCH
t <sub>PLH</sub> /t <sub>PHL</sub>	Open
t <sub>PLZ</sub> /t <sub>PZL</sub>	6V
t <sub>PHZ</sub> /t <sub>PZH</sub>	GND

#### **DEFINITIONS**

 $R_L$  = Load resistor; see AC CHARACTERISTICS for value.

 $C_L$  = Load capacitance includes jig and probe capacitance; see AC CHARACTERISTICS for value.

 $R_T = -$  Termination resistance should be equal to  $Z_{OUT}$  of pulse generators.

FAMILY	IN	PUT PULSE R	EQUIRE	MENTS	
	Amplitude	Rep. Rate	t <sub>W</sub>	t <sub>R</sub>	t <sub>F</sub>
74LVT	2.7V	≤10MHz	500ns	≤2.5ns	≤2.5ns


SV00092

### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### SO20: plastic small outline package; 20 leads; body width 7.5 mm

SOT163-1

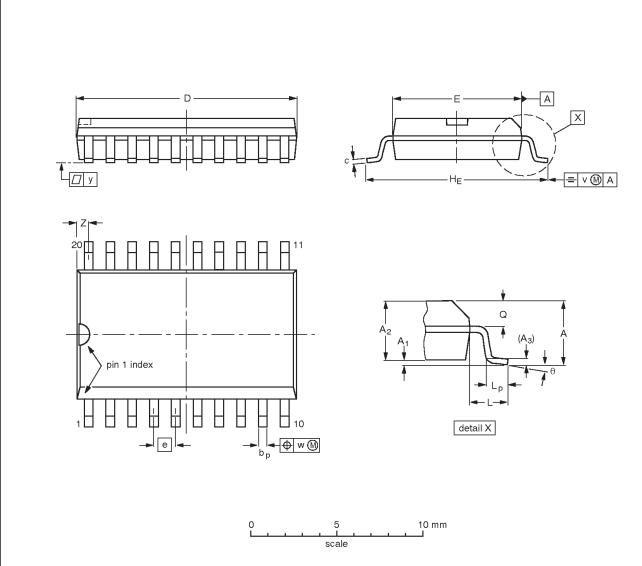

#### DIMENSIONS (inch dimensions are derived from the original mm dimensions)

UNIT	A max.	A <sub>1</sub>	A <sub>2</sub>	A <sub>3</sub>	Ьp	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Q	v	w	у	z <sup>(1)</sup>	θ
mm	2.65	0.30 0.10	2.45 2.25	0.25	0.49 0.36	0.32 0.23	13.0 12.6	7.6 7.4	1.27	10.65 10.00	1.4	1.1 0.4	1.1 1.0	0.25	0.25	0.1	0.9 0.4	8°
inches	0.10	0.012 0.004	0.096 0.089	0.01	0.019 0.014	0.013 0.009	0.51 0.49	0.30 0.29	0.050	0.419 0.394	0.055	0.043 0.016	0.043 0.039	0.01	0.01	0.004	0.035 0.016	0°

#### Note

1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.


OUTLINE REFERENCES	EUROPEAN	ISSUE DATE			
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE
SOT163-1	075E04	MS-013AC			<del>-95-01-24</del> 97-05-22

### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### SSOP20: plastic shrink small outline package; 20 leads; body width 5.3 mm

SOT339-1

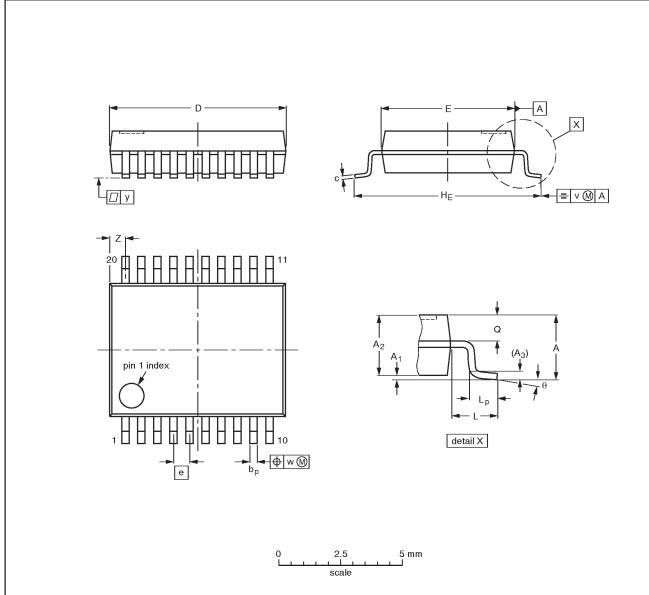

#### DIMENSIONS (mm are the original dimensions)

UNIT	A max.	Α1	A <sub>2</sub>	A <sub>3</sub>	bр	С	D <sup>(1)</sup>	E <sup>(1)</sup>	е	HE	L	Lp	Ø	v	w	у	Z <sup>(1)</sup>	θ
mm	2.0	0.21 0.05	1.80 1.65	0.25	0.38 0.25	0.20 0.09	7.4 7.0	5.4 5.2	0.65	7.9 7.6	1.25	1.03 0.63	0.9 0.7	0.2	0.13	0.1	0.9 0.5	8° 0°

#### Note

1. Plastic or metal protrusions of 0.20 mm maximum per side are not included.


OUTLINE		REFER	RENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE
SOT339-1		MO-150AE			<del>93-09-08</del> 95-02-04


### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### TSSOP20: plastic thin shrink small outline package; 20 leads; body width 4.4 mm

SOT360-1

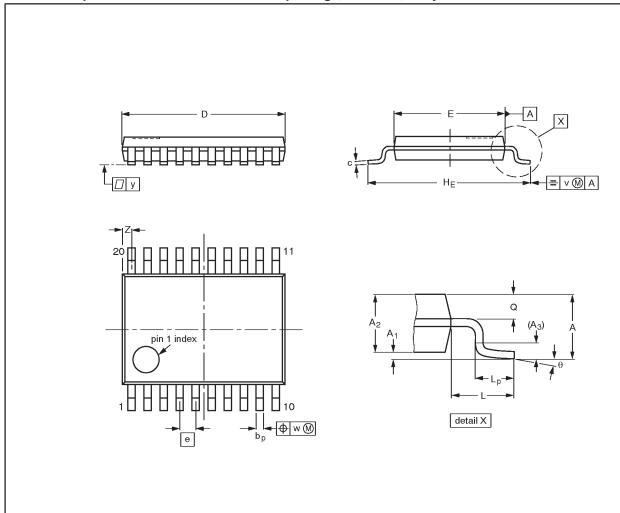



#### DIMENSIONS (mm are the original dimensions)

UNIT	A max.	Α1	A <sub>2</sub>	A <sub>3</sub>	рb	С	D <sup>(1)</sup>	E <sup>(2)</sup>	е	HE	L	Lp	Q	v	w	у	Z <sup>(1)</sup>	θ
mm	1.10	0.15 0.05	0.95 0.80	0.25	0.30 0.19	0.2 0.1	6.6 6.4	4.5 4.3	0.65	6.6 6.2	1.0	0.75 0.50	0.4 0.3	0.2	0.13	0.1	0.5 0.2	8° 0°

#### Notes

- 1. Plastic or metal protrusions of 0.15 mm maximum per side are not included.
- 2. Plastic interlead protrusions of 0.25 mm maximum per side are not included.

OUTLINE		REFER	ENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	EIAJ	PROJECTION	ISSUE DATE
SOT360-1		MO-153AC			<del>-93-06-16</del> 95-02-04

#### 3.3V Octal transceiver with direction pin (3-State)

74LVT245

#### Data sheet status

Data sheet status	Product status	Definition [1]
Objective specification	Development	This data sheet contains the design target or goal specifications for product development. Specification may change in any manner without notice.
Preliminary specification	Qualification	This data sheet contains preliminary data, and supplementary data will be published at a later date. Philips Semiconductors reserves the right to make chages at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Philips Semiconductors reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

<sup>[1]</sup> Please consult the most recently issued datasheet before initiating or completing a design.

#### **Definitions**

**Short-form specification** — The data in a short-form specification is extracted from a full data sheet with the same type number and title. For detailed information see the relevant data sheet or data handbook.

Limiting values definition — Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

**Application information** — Applications that are described herein for any of these products are for illustrative purposes only. Philips Semiconductors make no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

#### **Disclaimers**

**Life support** — These products are not designed for use in life support appliances, devices or systems where malfunction of these products can reasonably be expected to result in personal injury. Philips Semiconductors customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips Semiconductors for any damages resulting from such application.

Right to make changes — Philips Semiconductors reserves the right to make changes, without notice, in the products, including circuits, standard cells, and/or software, described or contained herein in order to improve design and/or performance. Philips Semiconductors assumes no responsibility or liability for the use of any of these products, conveys no license or title under any patent, copyright, or mask work right to these products, and makes no representations or warranties that these products are free from patent, copyright, or mask work right infringement, unless otherwise specified.

Philips Semiconductors 811 East Arques Avenue P.O. Box 3409 Sunnyvale, California 94088–3409 Telephone 800-234-7381 © Copyright Philips Electronics North America Corporation 1998 All rights reserved. Printed in U.S.A.

print code Date of release: 05-96

Document order number: 9397-750-03522

Let's make things better.

Philips Semiconductors



