
Vishay Semiconductors

IR Receiver Modules for Data Transmission



www.vishay.com

MECHANICAL DATA

Pinning for TSDP341.., TSDP343..: 1 = OUT, 2 = GND, 3 = V_S

FEATURES

- Very low supply current
- · Continuous data rates up to 7777 bps
- Range up to 32 m
- Photo detector and preamplifier in one package
- Internal filter tuned to 38.4 kHz for 4800 bps or 57.6 kHz for 9600 bps
- Shielding against EMI
- Supply voltage: 2.5 V to 5.5 V
- · Immunity against ambient light
- Insensitive to supply voltage ripple and noise
- Material categorization: for definitions of compliance please see <u>www.vishay.com/doc?99912</u>

DESCRIPTION


These products are miniaturized receivers for low speed infrared data transmission. A PIN diode and a preamplifier are assembled on a lead frame, the epoxy package contains an IR filter.

The demodulated output can be directly connected to a UART or a microprocessor. The TSDP34138 may be used for continuous reception of data according to RS-232 at 4800 bps in noise free environments. Higher data rate RS-232 may require data monitoring of gain levels. Non RS-232 codings may be used to achieve continuous average data rates up to 7800 bps in noisy ambients.

This component has not been qualified according to automotive specifications.


PARTS TABLE					
AGC		AGC1 FOR LOW NOISE ENVIRONMENTS	AGC3 FOR NOISY ENVIRONMENTS		
Carrier	38.4 kHz	TSDP34138	TSDP34338		
frequency	57.6 kHz	TSDP34156	TSDP34356		
Package		Mold			
Pinning		1 = OUT, 2 = GND, 3 = V _S	1 = OUT, 2 = GND, 3 = V _S		
Dimensions (mm)		6.0 W x 6.95 H x 5.6 D			
Mounting		Leaded			
Application		Data transmission			

BLOCK DIAGRAM



Rev. 1.1, 22-Aug-14

APPLICATION CIRCUIT 17170 5



 R_1 and C_1 are recommended for protection against EOS. Components should be in the range of 33 Ω < R_1 < 1 k Ω , C_1 > 0.1 $\mu F.$

Document Number: 82667

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000





(5-2008)





www.vishay.com

Vishay Semiconductors


ABSOLUTE MAXIMUM RATINGS					
PARAMETER	TEST CONDITION	SYMBOL	VALUE	UNIT	
Supply voltage		Vs	-0.3 to +6	V	
Supply current		I _S	3	mA	
Output voltage		Vo	-0.3 to (V _S + 0.3)	V	
Output current		Ι _Ο	5	mA	
Junction temperature		Tj	100	°C	
Storage temperature range		T _{stg}	-25 to +85	°C	
Operating temperature range		T _{amb}	-25 to +85	°C	
Power consumption	$T_{amb} \le 85 \ ^{\circ}C$	P _{tot}	10	mW	
Soldering temperature	$t \le 10$ s, 1 mm from case	T _{sd}	260	°C	

Note

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only
and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification
is not implied. Exposure to absolute maximum rating conditions for extended periods may affect the device reliability.

ELECTRICAL AND OPTICAL CHARACTERISTICS ($T_{amb} = 25 \text{ °C}$, unless otherwise specified)						
PARAMETER	TEST CONDITION	SYMBOL	MIN.	TYP.	MAX.	UNIT
Supply current	$E_v = 0, V_S = 3.3 V$	I _{SD}	0.27	0.35	0.45	mA
Supply current	E _v = 40 klx, sunlight	I _{SH}		0.45		mA
Supply voltage		Vs	2.5		5.5	V
Transmission distance	$E_v = 0$, test signal see fig. 1, IR diode TSAL6200, $I_F = 150 \text{ mA}$	d		35		m
Output voltage low	I _{OSL} = 0.5 mA, E _e = 0.7 mW/m ² , test signal see fig. 1	V _{OSL}			100	mV
Minimum irradiance	Pulse width tolerance: t _{pi} - 1/f ₀ < t _{po} < t _{pi} + 4/f ₀ , test signal see fig. 1	E _{e min.}		0.15	0.30	mW/m ²
Maximum irradiance	$\begin{array}{l} t_{pi} \text{ - } 1/f_0 < t_{po} < t_{pi} + 4/f_0, \\ \text{test signal see fig. 1} \end{array}$	E _{e max.}	30			W/m ²
Maximum pulse width	$E_{e min.} > 10 \text{ mW/m}^2, t_{pi} = 8/f_0$	t _{po max.}			11.5/f ₀	S
Directivity	Angle of half transmission distance	φ1/2		± 45		deg

TYPICAL CHARACTERISTICS (T_{amb} = 25 °C, unless otherwise specified)






Fig. 2 - Pulse Length and Sensitivity in Dark Ambient


Rev. 1.1, 22-Aug-14

2

Document Number: 82667

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. THE PRODUCTS DESCRIBED HEREIN AND THIS DOCUMENT ARE SUBJECT TO SPECIFIC DISCLAIMERS, SET FORTH AT www.vishay.com/doc?91000



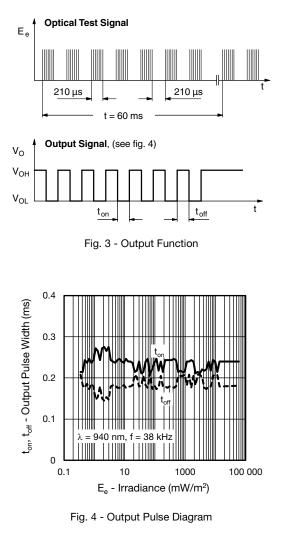




Fig. 5 - Frequency Dependence of Responsivity

Vishay Semiconductors




Fig. 6 - Sensitivity in Bright Ambient




Fig. 7 - Sensitivity vs. Supply Voltage Disturbances




Fig. 8 - Maximum Envelope Duty Cycle vs. Burst Length

Rev. 1.1, 22-Aug-14






Fig. 9 - Sensitivity vs. Ambient Temperature




Fig. 10 - Relative Spectral Sensitivity vs. Wavelength

Vishay Semiconductors




Fig. 11 - Horizontal Directivity




Fig. 12 - Sensitivity vs. Supply Voltage

4



SUITABLE DATA FORMAT

Theses receivers are designed to suppress spurious output pulses due to noise or optical disturbances. The devices can distinguish data signals from noise due to differences in frequency, burst length, and envelope duty cycle. For optimum sensitivity, the data's modulation frequency should be close to the device's band-pass center frequency (e.g. 38.4 kHz) and fulfill the conditions in the table below.

When a data signal is applied to the receiver in the presence of noise, the sensitivity of the receiver is automatically reduced by the AGC to insure that no spurious pulses are present at the receiver's output. Some examples of noise which is suppressed:

- DC light (e.g. from tungsten bulbs sunlight)
- · Continuous signals at any frequency
- Strongly or weakly modulated patterns from fluorescent lamps with electronic ballasts (see fig. 13 or fig. 14).

Vishay Semiconductors




Fig. 13 - IR Disturbance from Fluorescent Lamp with Low Modulation





Fig. 14 - IR Disturbance from Fluorescent Lamp with High Modulation

	TSDP341	TSDP343
Minimum burst length	6 cycles/burst	6 cycles/burst
After each burst of length A gap time is required of	6 to 70 cycles ≥ 7 cycles	6 to 35 cycles ≥ 7 cycles
For bursts greater than a minimum gap time in the data stream is needed of	70 cycles > 1.2 x burst length	35 cycles > 6 x burst length
Maximum number of continuous short bursts/second	3000	3000
Suppression of interference from fluorescent lamps	Mildly modulated noise patterns are suppressed (fig. 13)	Strongly modulated noise patterns are suppressed (fig. 14)




PACKAGE DIMENSIONS in millimeters

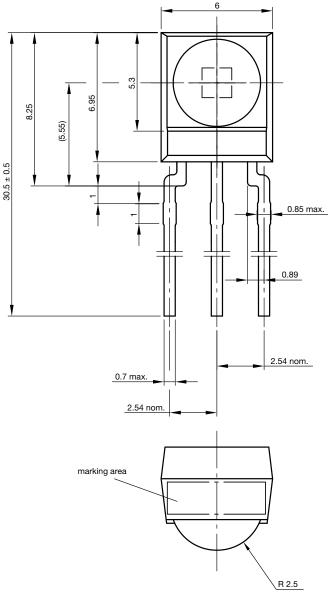

TSDP341.., TSDP343..

Vishay Semiconductors

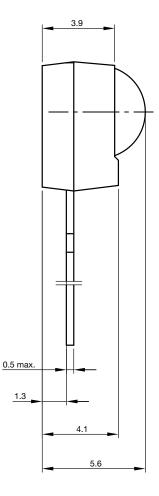

Not indicated tolerances ± 0.2



according to DIN specifications

Drawing-No.: 6.550-5169.01-4 Issue: 9; 03.11.10



Vishay

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.