

Features

- 500 Watts Peak Pulse Power per Line ($t_p = 8/20\mu s$)
- Replacement for MLV (0603)
- Protects one I/O or power line
- Low Clamping Voltage
- Working Voltage: 24V
- Low Leakage Current
- Response Time is Typically $< 1\text{ ns}$



IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) $\pm 15\text{kV}$ (air), $\pm 8\text{kV}$ (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 6A (8/20 μs)

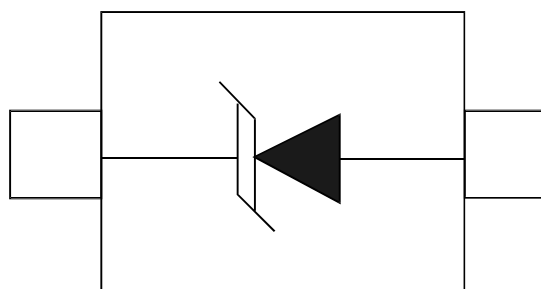
Mechanical Characteristics

- JEDEC SOD-523 package
- Molding compound flammability rating:
UL 94V-0
- Marking : Marking Code
- Packaging : Tape and Reel per EIA481
- RoHS Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 players

Schematic & PIN Configuration



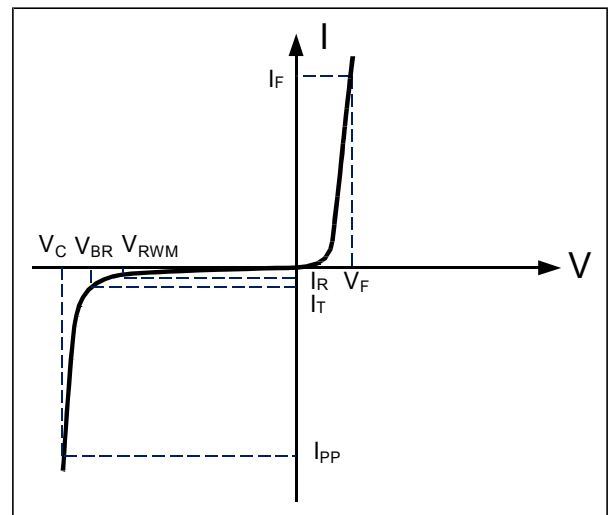
SOD-523 (Top View)

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	500	Watts
Peak Pulse Current ($t_p = 8/20\mu s$)	I_{pp}	6	A
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	+/- 15 +/- 8	kV
Operating Temperature	T_J	-55 to + 125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

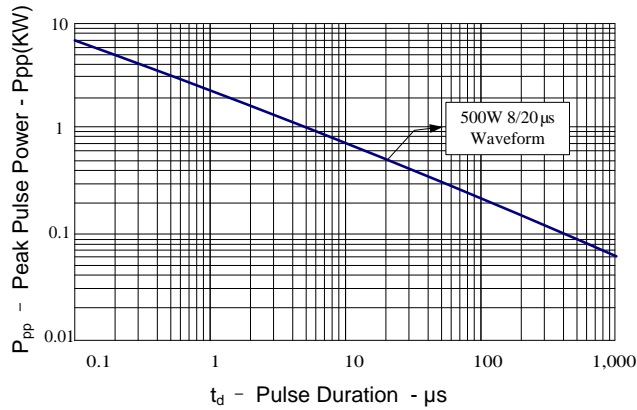
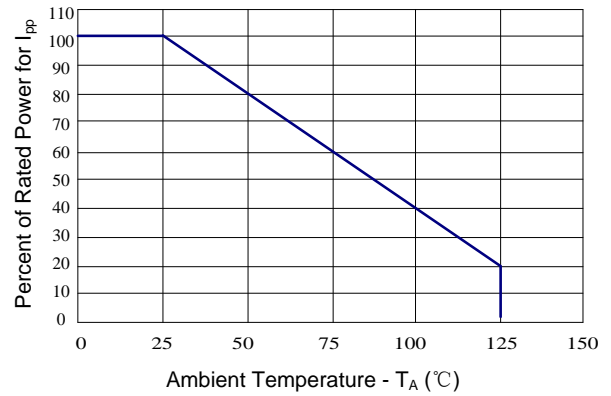
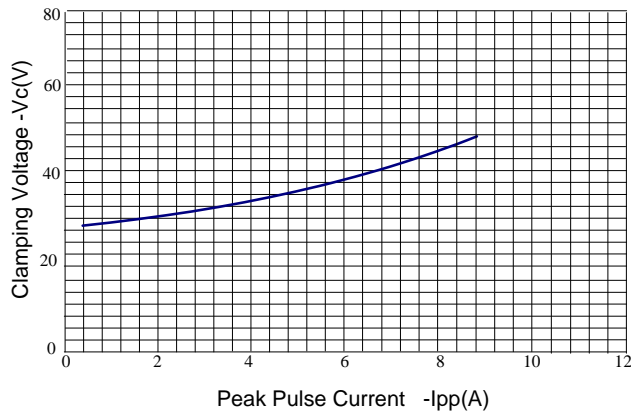
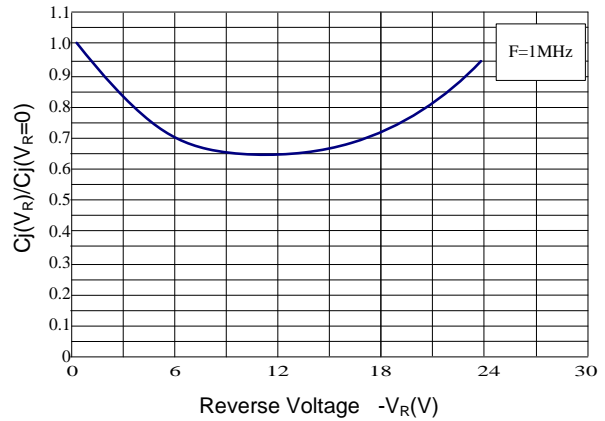
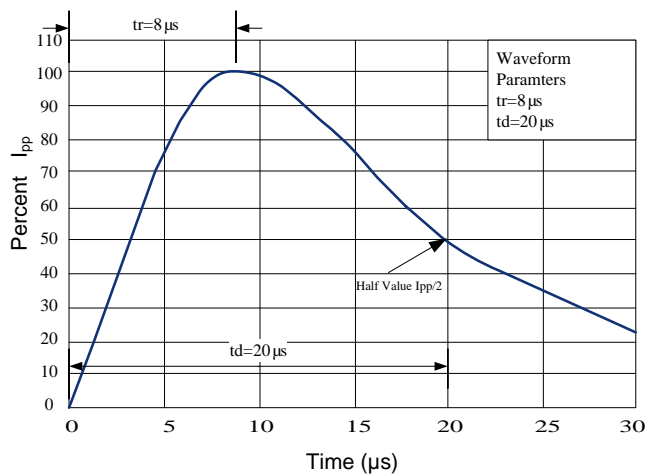
Electrical Parameters (T=25°C)

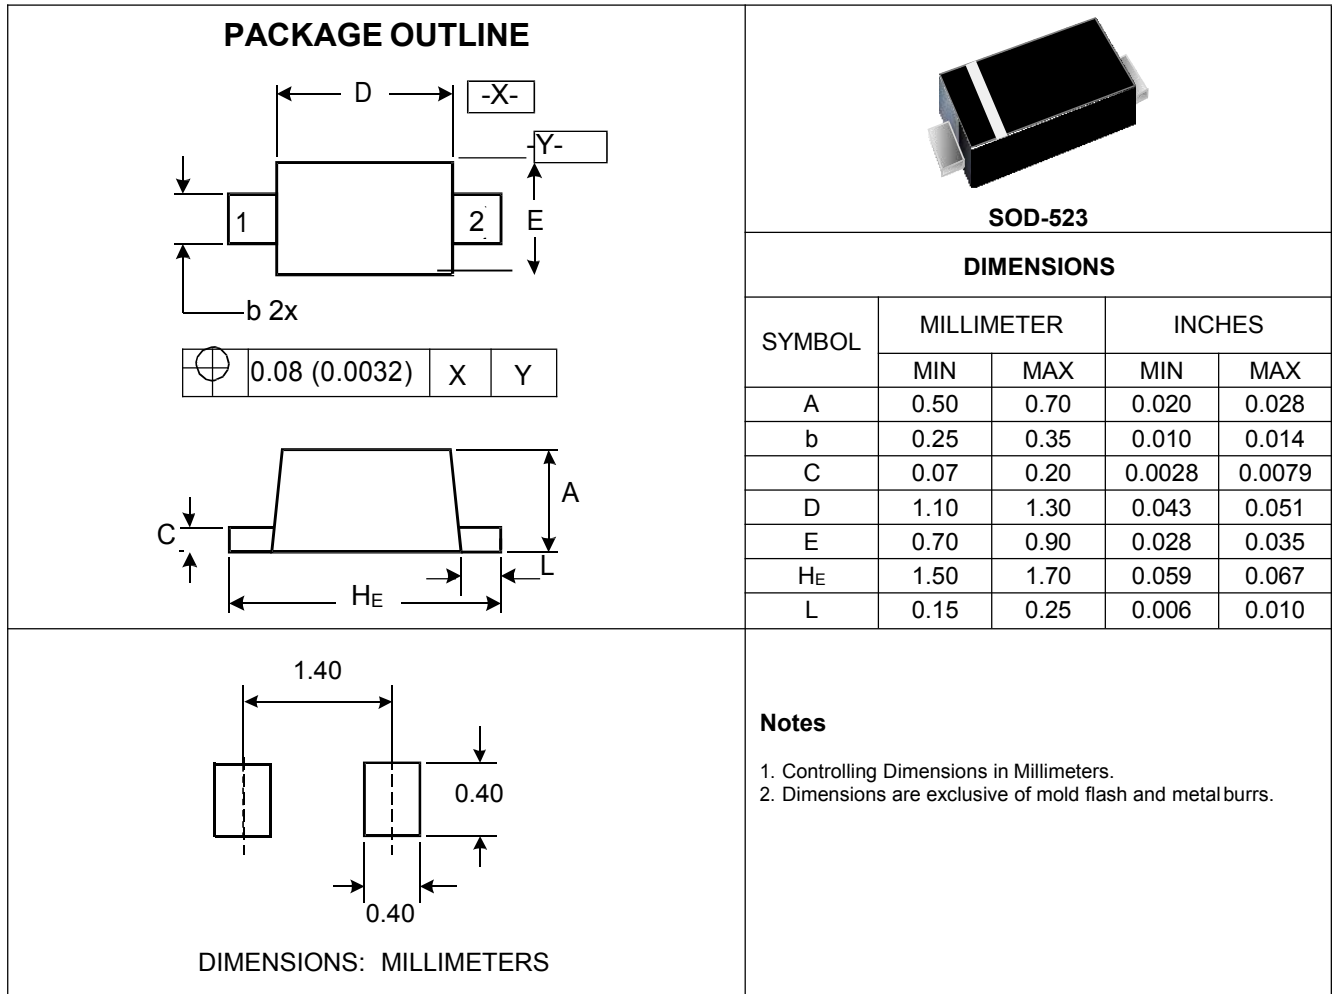
Symbol	Parameter
I_{PP}	Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F


Electrical Characteristics

Part Number	Reverse Stand off Voltage V_{RWM} (Volts)	Minimum Breakdown Voltage $V_{BR}@1mA$ (Volts)	Maximum Clamping Voltage $V_C@I_{PP}$ (Volts)	Maximum Peak Pulse Current I_{pp} (Amps)	Maximum Reverse Leakage current $I_R@V_{RWM}(\mu A)$	Typical Capacitance DC=0V $C_J@1MHz$ (pF)
BSD5A241V35	24	26.7	67.0	6	1	30

Typical Characteristics

Figure 1: Peak Pulse Power vs. Pulse Time

Figure 2: Power Derating Curve

Figure 3: Clamping Voltage vs. Peak Pulse Current

Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

Figure 5: Pulse Waveform


Outline Drawing – SOD-523

Marking Codes

Package Information

Qty: 5k/Reel