



SOP-14

DIP-14

Description

The SN324/P is quad operational amplifiers with true differential inputs. They have several distinct advantages over standard operational amplifier types in single supply applications.

The quad amplifier can operate at supply voltages as low as 3.0 V or as high as 32V, The common mode input range includes the negative supply, thereby eliminating the necessity for external biasing components in many applications.

The output voltage range also includes the negative power supply voltage.

Application

- ◆ Transducer amplifier
- ◆ DC gain blocks
- ◆ Conventional operational amplifiers

ORDERING INFORMATION

Product	Marking	Package
SN324	SN324	SOP-14
SN324P	SN324P	DIP-14

▲ Marking Information




(1) Device Code

(2) Year & Week Code

Features and Benefits

- ◆ Short Circuited Protected Outputs
- ◆ True Differential Input Stage
- ◆ Single Supply Operation: 3.0 V to 32 V
- ◆ Low Input Bias Currents: 100 nA Maximum
- ◆ Common Mode Range Extends to Negative Supply

◆ Internal Block Diagram

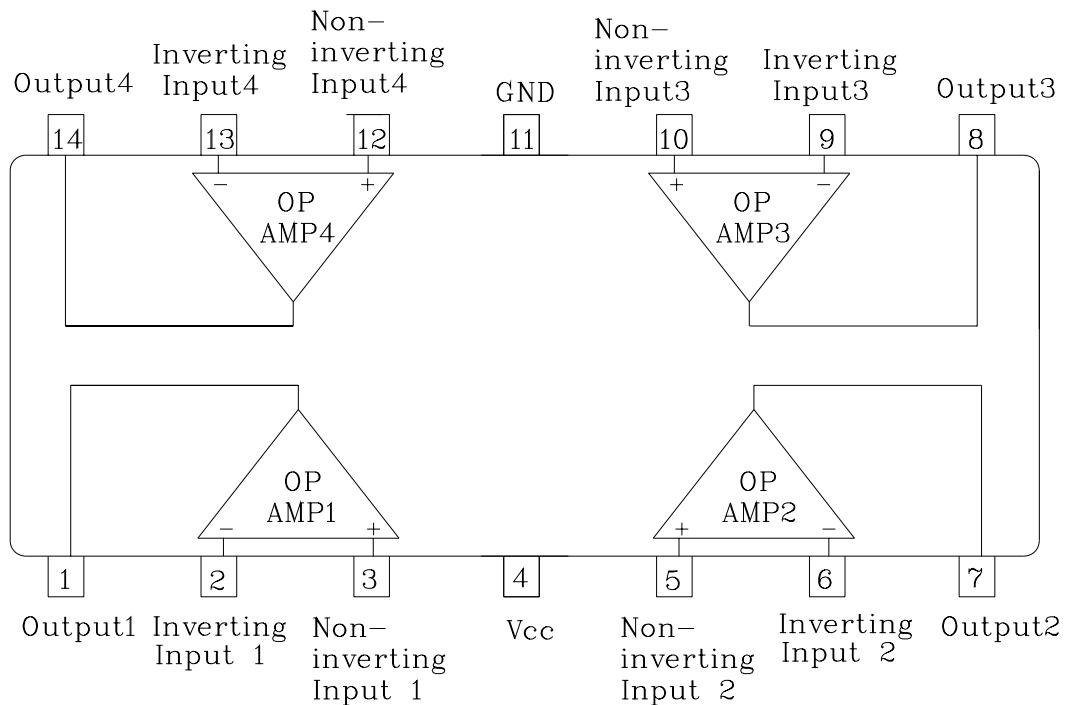

◆ Pin Description

No	Symbol	I/O	Description
1	Output1	O	OP-Amp1's Output
2	IN1(-)	I	OP-Amp1's Inverting Input
3	IN1(+)	I	OP-Amp1's Non-Inverting Input
4	V _{CC}	PWR	V _{CC} for Dual Operational Amplifier
5	IN2(+)	I	OP-Amp2's Non-Inverting Input
6	IN2(-)	I	OP-Amp2's Inverting Input
7	Output2	O	OP-Amp2's Output
8	Output3	O	OP-Amp3's Output
9	IN3(-)	I	OP-Amp3's Inverting Input
10	IN3(+)	I	OP-Amp3's Non-Inverting Input
11	GND	GND	Ground
12	IN4(+)	I	OP-Amp4's Non-Inverting Input
13	IN4(-)	I	OP-Amp4's Inverting Input
14	Output4	O	OP-Amp4's Output

Absolute maximum ratings

Characteristic	Symbol	Ratings	Unit
Supply voltage	V _{CC}	36 or ± 18	V
Differential input voltage	V _{IND}	36	V
Input voltage	V _{IN}	-0.3 ~ +36	V
Power Dissipation	P _D	SOP-14	800
		DIP-14	1300
Operating temperature	T _{opr}	-40 ~ +85	°C
Storage temperature	T _{stg}	-55 ~ 150	°C

Electrical Characteristics

(Unless otherwise specified. V_{CC} = 5V, V_{EE} = GND and 0 °C ≤ Ta ≤ +70 °C)

Characteristic	Symbol	Test Condition		Min.	Typ.	Max.	Unit
Input offset voltage	V _{IOS}	V _{CC} = 5~30V R _g = 0Ω		-	2	7	mV
Input offset current	I _{IOS}	-		-	5	30	nA
Input bias current	I _{IB}	-		-	45	150	nA
Input common mode voltage range	V _{ICR}	V _{CC} = 30V, Ta=25°C		0	-	V _{CC} -1.5	V
Supply current	I _{CC}	R _L = ∞, All Channel		-	0.7	1.2	mA
Large signal voltage gain	G _V	V _{CC} = 15V R _L ≥ 2 KΩ		86	100	-	dB
Output voltage swing	V _{OH}	V _{CC} = 30V	R _L =2 KΩ	26	-	-	V
			R _L =10 KΩ	27	28	-	
	V _{OL}	V _{CC} = 5V, R _L ≤ 10 KΩ		-	5	20	mV
Common mode rejection ratio	CMRR	V _{CC} =5V~15V, V _{IC} =V _{IVRMIN} Ta=25°C		65	85	-	dB
Power supply rejection ratio	PSRR	V _{CC} =5V~15V, Ta=25 °C		65	100	-	dB
Output source current	I _{O+}	V _{CC} = 15V V _{IN+} = 1V, V _{IN-} = 0V	Ta=25°C	20	40	-	mA
				10	-	-	
Output sink current	I _{O-}	V _{CC} = 15V V _{IN+} = 0V, V _{IN-} = 1V	Ta=25°C	10	20	-	mA
				5	-	-	
		V _{OUT} = 200mV, Ta=25°C V _{IN+} = 0V, V _{IN-} = 1V, V _{CC} = 15V		12	45	-	μA

Electrical Characteristic Curves

Fig. 1 I_{CC} - V_{CC}

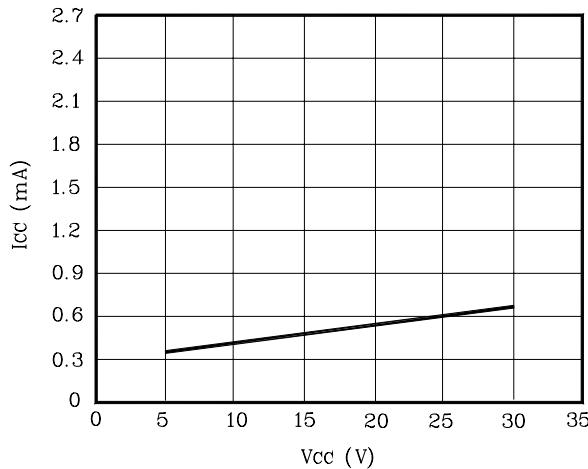


Fig. 2 I_{IB} - V_{CC}

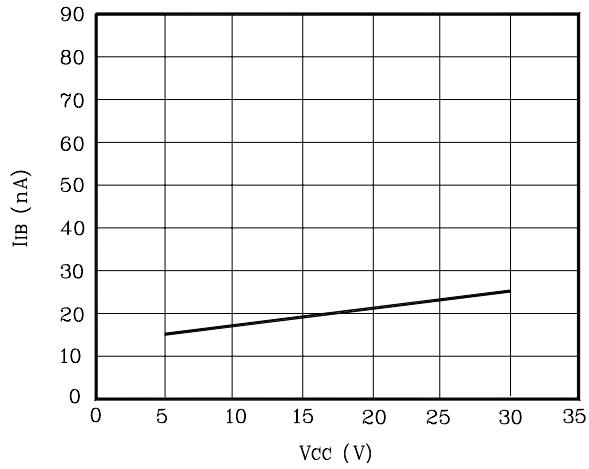


Fig. 3 V_{ios} - T_a

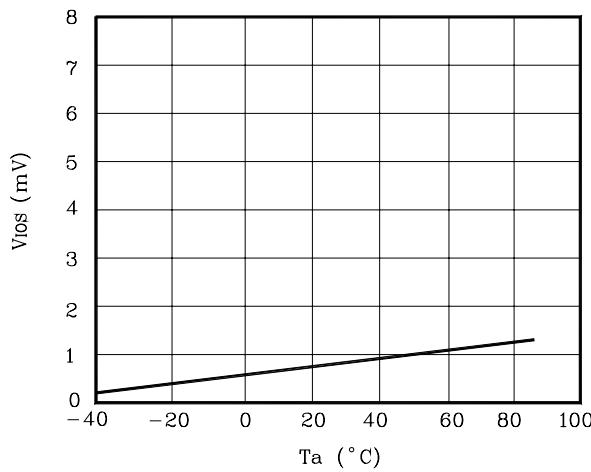


Fig. 4 I_o - T_a

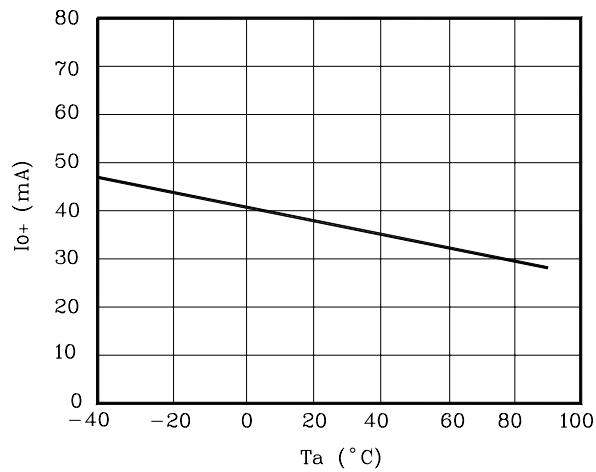


Fig. 5 CMRR-f







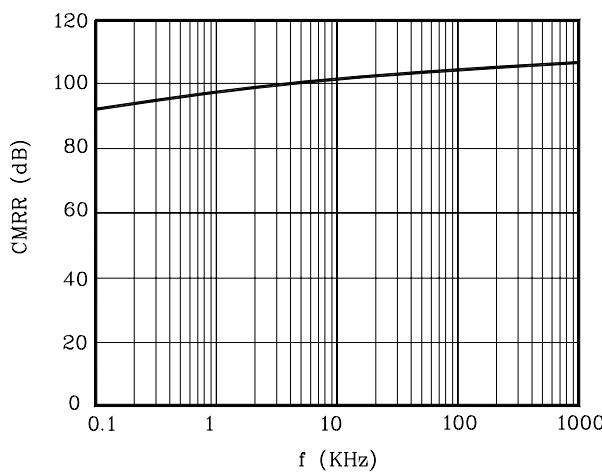



Fig. 6 V_{OR} -f

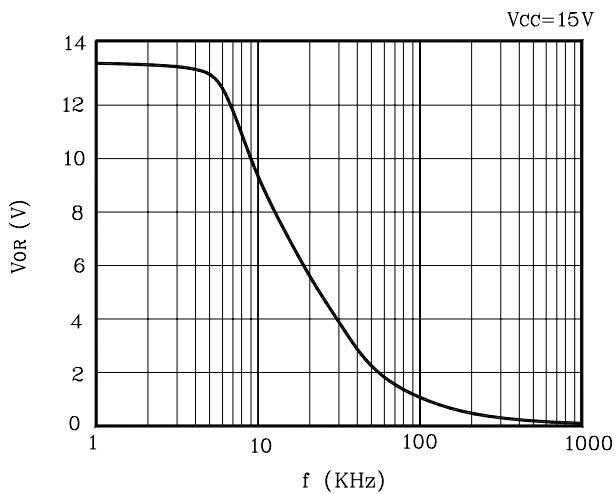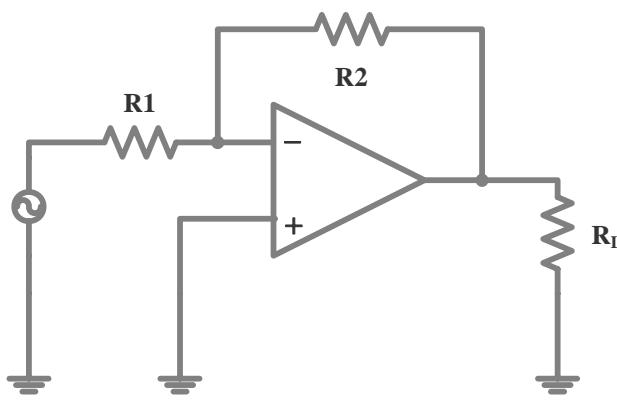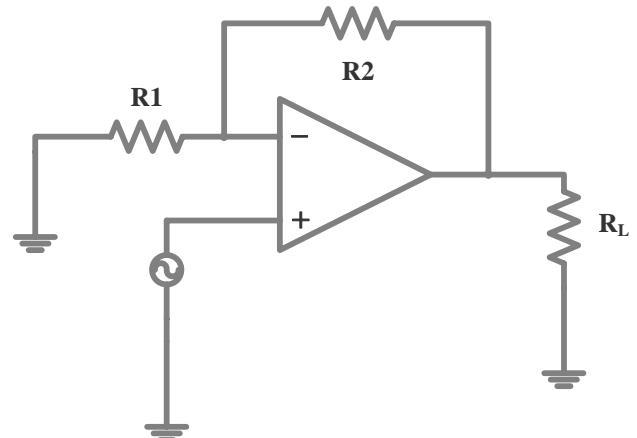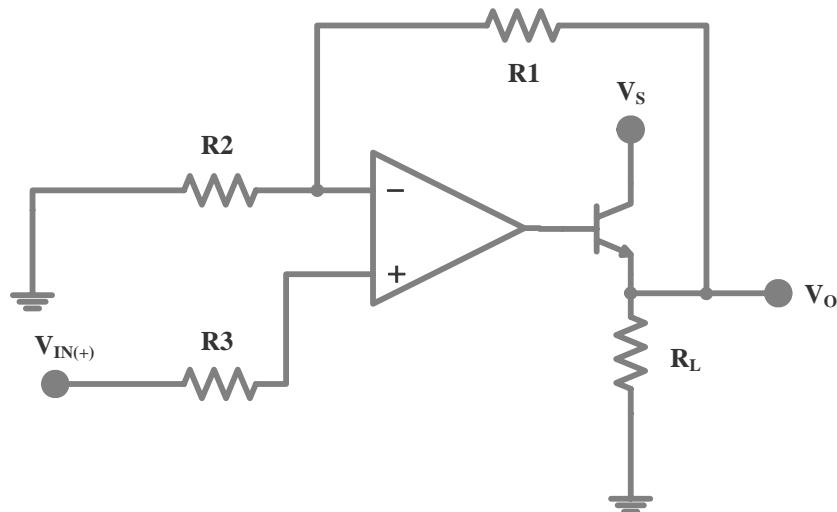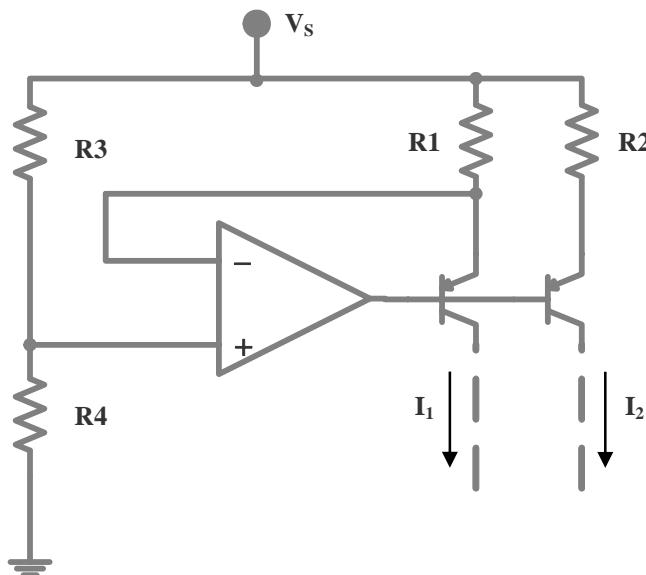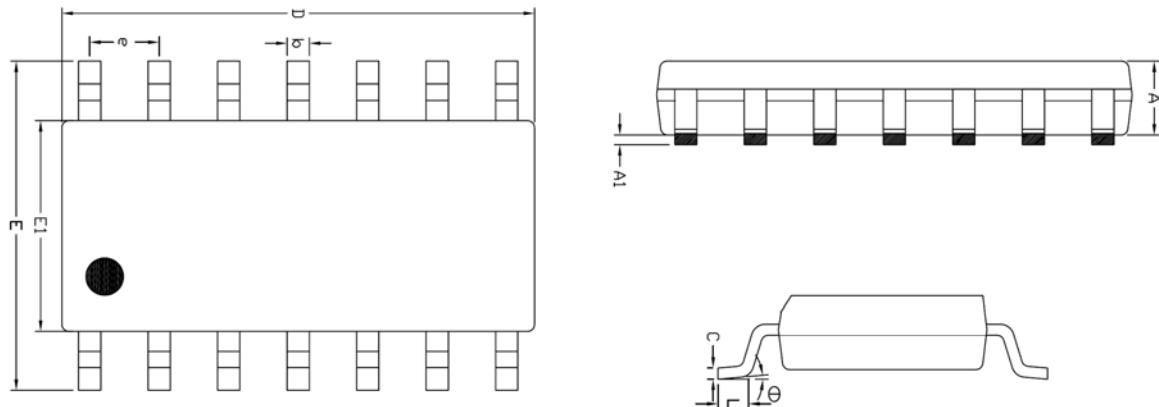


Typical Applications**Inverting Amplifier****Non-inverting Amplifier****Power Amplifier****Fixed Current Sources**

Outline Dimension (Unit : mm)


SYMBOL	MILLIMETER(mm)			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	1.245	—	1.445	
A1	0.125	0.175	0.275	
b	0.320	0.420	0.520	
c	0.170	0.220	0.270	
D	8.536	8.636	8.736	
E	5.870	6.020	6.170	
E1	3.761	3.861	3.961	
e		1.270 BSC		
L	0.462	0.562	0.662	
θ	0 °	—	8 °	

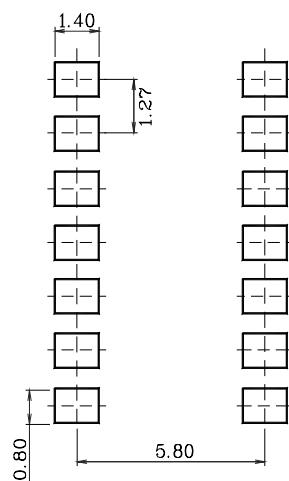*** Recommend PCB solder land (Unit : mm)**


Outline Dimension (Unit : mm)

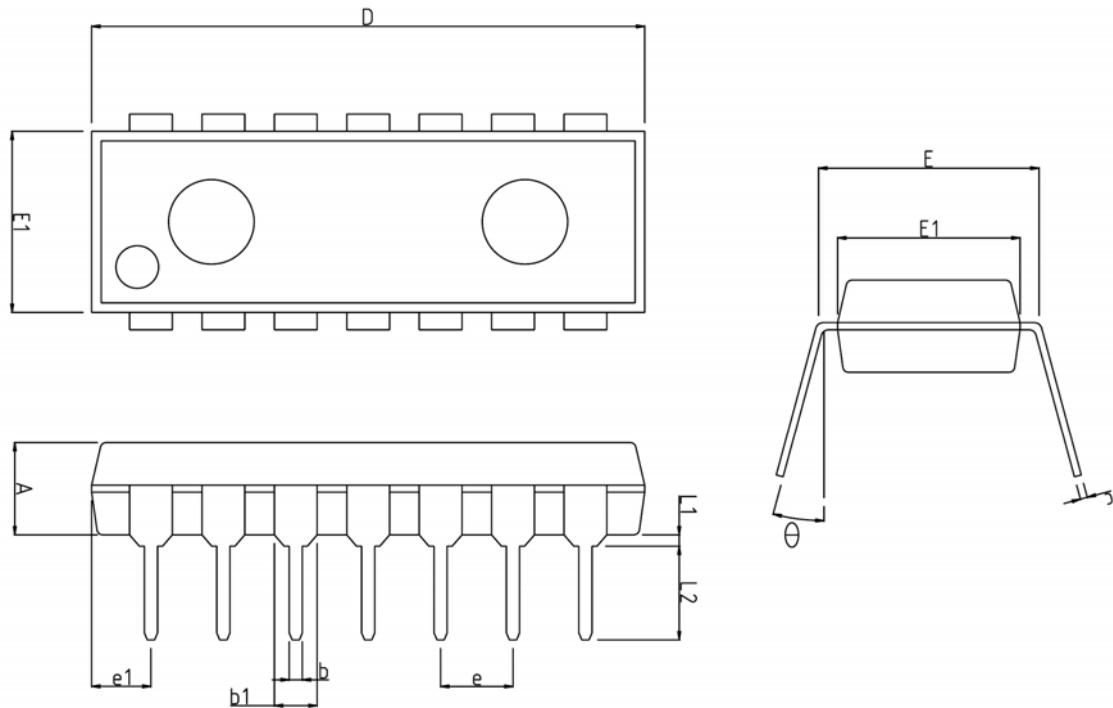

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	3.05	3.25	3.45	
b	0.36	0.46	0.56	
b1	1.40	1.50	1.60	
c	0.20	0.25	0.35	
D	19.20	19.40	19.60	
E	7.37	7.62	7.87	
E1	6.20	6.40	6.60	
e	2.54 TYP			
e1	2.08 TYP			
L1	0.20	—	—	
L2	3.00	3.30	3.60	
θ	0°	—	15°	

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.