ISO9001: 2000 ISO14001: 2004

## **APPROVAL SPECIFICATIONS**

Title. TACT SWITCH

Product Model. KAN0644

Customer's Part NO.

Customer's Model:

### Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	POLT
黄蜀东	关林	曹盖



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
		KAN0644	TACT SWITCH	A	

### A. Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type, specification and code is as follows.

KAN0644 — □□□	
	ТТ
	Press force (refer to chart 3)
	Stem color (refer to chart 2)
	Product height (refer to chart 1)

1. Product height: It is denoted by three figures; For examples, "025" expresses the product which the total height is 2.5mm, as chart 1 shows:

Code	Product height	Code	Product height	Code	Product height
025	2.5	050	5.0		
027	2.7	055	5.5		
030	3				
031	3.1				
034	3.4				
037	3.7				
043	4.3				

2. Stem color: It is expressed by a figure, as chart 2 shows:

Color	Black	Red	White	Brown
Code	1	2	3	9

3. Operating force: An English letter expresses it, unite: Newton (N),as chart 3 shows:

Operating force Code Spec		Press force	Return force
Α	1.0	1.0±0.3	0.2min
В	1.6	1.6±0.5	0.4min
С	2.6	2.6±0.5	0.6min

Examples: "KAN0644-0251B" denotes the tact switch with  $6\times6$  base, the height is 2.5mm,the stem is black , the operating force is 1.6N.

APPROVE BY 黄蜀东 09.10.2	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25
------------------------	------------	--------------	-----------	--------------



GYUAN CO.,LTD

CUSTOMER	CUSTOMER'S P/N	JSTOMER'S P/N GYE'S P/N		REVISION
		KAN0644	TACT SWITCH	Α

#### 1、 概述

**GENERAL** 

1.2 适用范围

#### **APPLICATION**

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

#### **Operating Temperature Range**

-20℃~70℃(在标准大气压、标准湿度条件下)

-20°C ~70°C (Normal humidity, normal air pressure)

1.4 贮藏温度范围 1 1 5

### Storage Temperature Range

-30℃~80℃(在标准大气压、标准湿度条件下)

 $-30^{\circ}$ C  $\sim$ 80°C (Normal humidity, normal air pressure)

1.5 测试条件

#### **Test Conditions**

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

Temperature......20°C±2°C

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa $\sim$ 106Kpa



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
		KAN0644	TACT SWITCH	Α	

#### 详细说明 2

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

2. 4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出: Solution of the contact arrangement: 1 pole, 1 throw 1 1 pole, 1 throw 1 1 pole, 1 throw 1

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

#### **ELECTRICAL SPECIFICATION**

项	目		٦	试 验 条 件				
ITE	ITEM		TE	EST CONDITIONS		REQU	IREMENTS	
1		接触电阻 Contact Resistance	在以 5V 10mA 的直流电源或不低于 1KHz 的交流电源的电路中,以一个等于 2 倍按力的静负荷施加于手柄中心 Applying a static load of 2 times operating force to the center of the stem, measurements shall be made by 5V DC 10mA or more than 1KHZ AC small-current contact resistance meter.				≤100mΩ	
2	I	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值  Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.				≥100MΩ	
3	D	广质耐压 ielectric ltage proof	在端子之间施加 250V AC(50HZ 或 60HZ)/1min 250V AC (50HZ or 60HZ) shall be applied across terminals, for one minute.			T no b	b穿、无飞弧 here should be reakdown and flashover	
APPROVE	E BY	黄蜀东 09.10.2	25 CHECKED BY 关林 09.10.25 PRPARE BY			Y	曹 盖 09.10.25	



C	USTOMER	CUSTOMER'S P/I	N GYE'	S P/N	Pl	RODUCT		REVISION
			KAN	0644	TAC	T SWITCH	1	А
	项目		试验条	: 件			<u> </u>	要求
	ITEM		TEST COND	ITIONS			RE	QUIREMENTS
	4. 机械性能: MECHANICAL SPECIFICATION							
1	按力 Operating Force	量开关导通所需的量 Placing the switch vertical and then g center of the stem,	开关垂直于操作方向放置,在开关驱动件顶端中心逐渐施力,测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.				re	efer to chart 3
2	最大行程 Full Travel	开关驱动件顶端中心 Placing the switch vertical and then ap the center of the ste	开关垂直于操作方向放置,以一个等于 2 倍按力的静负荷施加在开关驱动件顶端中心,测量顶端移动的距离。Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to the center of the stem; the travel distance for the switch to come to a stop shall be measured.					0.25±0.1mm
APP	ROVE BY	黄蜀东 09.10.25  C	HECKED BY	关 林 09.1	10.25	PRPAR	E BY	曹 盖 09.10.25



	J110					
С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION
			KAN0644	TACT SWITCH	4	Α
	项目		试验条件		ı	要求
	ITEM TEST CONDITIONS				RE	QUIREMENTS
3	回弹力 Return Force	开关垂直于操作方向适后,测量顶端向自由位 The sample switch is operation is vertical a to the whole travel dis	开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程后,测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center of the whole travel distance, the force of the stem to return to its ree position shall be measured.			
4	停止强度 Stop Strengtl	荷持续 1min。 Placing the switch su vertical, and then a	效置,从操作方向向驱动作 ch that the direction of s static load of 30N shall ration for a period of 1 mi	witch operation is be applied in the	There :	几械和电气损坏 shall be no sign of e mechanically and electrically.
5	手柄拔出 强度 Stem Strength	的行程范围。 Placing the switch su vertical, and then the	效置,反方向实施最大操 ch that the direction of s maximum force to withst on of stem operation sha	witch operation is and a pull applied		20N.min.
6	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2s±0.5s Immersion time: 2s±0.5s 对于其它步骤参考《GB 5095.6—86》试验 12a The other steps please refer to《GB 5095.6-86》TEST 12a			90%以」 Except	for the edge, the should cover a	
APPROVE BY 黄蜀东 09.10.25 CHE			ECKED BY 关 林 09	.10.25 PRPAR	RE BY	曹 盖 09.10.25



		1101	UAN		<i>/</i> <b>(1 1 1 1 )</b>	O V/ \L	<u> </u>		<u> </u>	3110
С	USTOMER		CUSTOMER	.'S P/N	GYE'	S P/N	Pi	RODUCT		REVISION
					KAN	0644	TAC	T SWITCH		А
	项目				试 验	条件				要求
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
	限电气性能: RONMENTAL	L SPEC	CIFICATION							
1	低温测试 Resistance low tempera	to ature	标准湿度的 Following to normal ten measurem (1) 温度 Tem (2) 时间	环境中 the test nperatu ents are 度: -30±	±2°0 /~\\\ e:-30±2°C	能测试: ow the sa	mple shall	be left in h before	Contac ≤200m! 项目 3,4	
2	高温测试 Heat resista	ance	标准湿度的 Following to normal ten measureme (1) 温质 ten (2) 时间	temperature:80±2°C					Contac ≤200m 项目 3,4	
3	温度周期性 Change temperat	of	样品应放在 试期间样品 After 5 cy allowed to conditions	常温及 应保持 cles of stand for 1 h.	式要求进行 5 次循环的温度周期性测试, 实验后 是及标准湿度的环境中 1 小时后做性能测试。测 对持干燥.  of following conditions, the sample shall be and under normal temperature and humidity 1 h. and measurements shall be made. During drops shall be removed.  Temperature Time  -10±2℃ 2(hour)  -10∼65℃ 1				Contac ≤200m 项目 3,4	
APP	ROVE BY	黄蜀	东 09.10.25	СНЕ	ECKED BY	关 林 0	9.10.25	PRPARE	BY	曹 盖 09.10.25



С	USTOMER	CUSTOMER'S	P/N GYE	S P/N	PRODUCT		REVISION
			KAN	0644	TACT SWITCH		А
	项目		试 验	条件			
	ITEM		TEST CON	NDITIONS		REC	QUIREMENTS
4	湿温测试 Moisture resistance	标准湿度的环 Following the normal temp measuremen (1) 温度: tempe (2) 相对证 relative	temperature: 60±2°C				H: ≤200mΩ resistance: Ω 1.1,4.2,4.3 1.1,4.2,4.3
5	硫化试验 Sulfuration resistance	标准湿度的环 Following the normal temp measuremen (1) H2S H <sub>2</sub> S ga (2) 时间: Time: (3) 温度:	H <sub>2</sub> S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h				∄: ≤200mΩ resistance: Ω I.1,4.2,4.3 I.1,4.2,4.3
6	盐雾试验 Salt Mist	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution: 5±1%(solids by mass) (3) 时间: 8h±1h				金属件上没有腐蚀斑点 No remarkable corrosion shall be recognized in metal part.	
APP	PROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.	10.25 PRPAR	E BY	曹 盖 09.10.25



	GA	ING T	UAN	AFFN	OVAL	OF L		$\lambda$	טווכ
С	USTOMER	(	CUSTOMER'S	P/N GYE'	S P/N	Р	RODUCT		REVISION
				KAN	0644	TAC	CT SWITCH		А
	限机械性能: NDURANCE	SPEC	IFICATION	<u> </u>				l	
	项目			试 验	条件				要求
	ITEM			TEST CON	IDITIONS			RE	QUIREMENTS
1	工作寿命 Operation		Measurement (1) DC 12\ DC 12\ (2) 按动速率 Rate ( (3) 按力:	试要求进行测试: t shall be made fol V,50mA 带负载 V,50 mA resistive 容:1次/秒 of operation:1 tim 按力的1.5倍	lowing the telload es/s erating Ford ge fault-free 1000 8000	e1.5dou	N C	接触电 resistar 接力: Operati initial va 项目 3,4	阻≤200mΩContact nce≤200mΩ
2	振动 Vibra	ition	Measurement  (1) 振动频  Vibra  (2) 振幅  Ampl  (3) 振动  Direct direct  (4) 测试时	条件进行测试: t shall be made fol 频率范围: 10~55 ation frequency rai (峰一峰): 1.5mm litude: 1.5mm 方向: 包括手柄行程 向 ction of vibration: tion including the o ation: Each 2hours	~10Hz nge: 10 to 55 n 星方向在内的 Three mutu direction of s	5 to 10H: 三个相互 ally perp	z 互垂直的方 pendicular		4.1,4.2,4.3 4.1,4.2,4.3
_	接条件: )ERING CON	DITIOI	NS:						
				ᇇᆕᄝᄺᄺᄱᇋᅜ					
				以下条件进行焊接	:				
			(1) 火	焊锡温度: ≤350℃	C				
7.1	手工焊接 Hand solds	aring	(2) i	连续焊接时间: ≤3	3 s				
	Hand soldering		Pleas	se practice accord	ling to below	conditio	ons:		
			<ul><li>(1) Soldering temperature: 350°C Max.</li><li>(2) Continuous soldering time: 3 s Max.</li></ul>						
			CHECKED BY	关 林 09.	10.25	PRPARE	BY	曹 盖 09.10.25	



CUSTOMER CU	JSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0644	TACT SWITCH	I A
项目	,	推考	条件	
ITEM		Recommend	ded conditions	
回流焊时 7.2 Conditions for reflow	温度(*C) 180 + 150 -	120sec max.(预; 3 to 4 m 炉内通过	热) 4(in.	260°C max. 3sec max. 230°C ——— 时间 Os max.

说明: 1.1 开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent

1.2 在使用烙铁的情况下,焊锡温度应在 380℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 380℃ max and 3 sec.max.

1.3 浸焊后, 注意不要在顶部施加负荷。


Right after switches were soidered; please be careful not to load to on the knobs of switches.


- 2 设计中应注意的事项( Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。
  Follow recommended P.W.B. piercing plan in outside drawing page.
- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关 Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .


ı						
	APPROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0644	TACT SWITCH	A

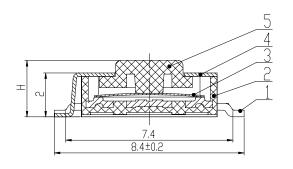



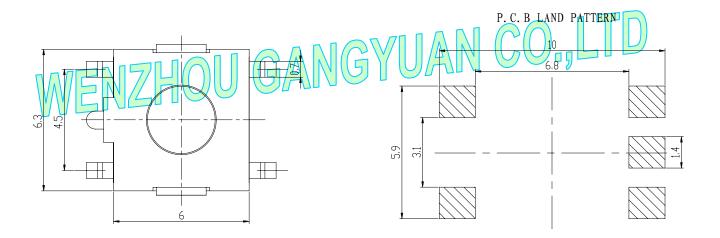

General tolerance: ±0.2mm

NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
1	TERMINAL	Brass	China	1	Silver plating
2	CASE	FR52	USA	1	Black
3	CONTACT	Ag/STS	Korea	1	Contact side silver plating
4	COVER	Phosphor bronze	China	1	CuSn plating
5	STEM	FR52	USA	1	

APPROVE BY	黄蜀东 09.10.25	CHECKED BY	关 林 09.10.25	PRPARE BY	曹 盖 09.10.25
------------	--------------	------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN0644	TACT SWITCH	A

### 8. 生产工场: The country of origin

WENZHOU GANGYUAN ELECTRONICS CO.,LTD
NO.392 NING KANG EAST ROAD OF YUE QING CITY, ZHE JIANG

### 9. 包装: Packing

产品规格	包装袋 PAC	KING BAG	内包装箱 INTEF	R BOX	外包装箱 OU	ТВОХ	净重	毛重
KAN0644	规 格(Cm)	数量(pcs)	规 格(Cm)	袋数	规_格(Cm)	盒数	(Kg)	(Kg)
025	19×16	1000	21.6×16.5×4.8	3	$44.5 \times 35 \times 28$	7 20	10.7	13.066
027	19×167/	1000	21.6×16.5×4.8	3	44.5×35×28	20	10.9	13.366
030	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5\times35\times28$	20	11.1	13.466
031	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5 \times 35 \times 28$	20	11.2	13.566
034	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5 \times 35 \times 28$	20	11.5	13.866
037	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5\times35\times28$	20	11.7	14.066
043	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5 \times 35 \times 28$	20	12.3	14.666
050	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5\times35\times28$	20	12.5	14.866
055	19×16	1000	$21.6 \times 16.5 \times 4.8$	3	$44.5\times35\times28$	20	12.7	15.066

APPROVE BY	黄蜀东 09.10.15	CHECKED BY	关林 09.10.15	PRPARE BY	曹 盖 09.10.15