

# **Technical Data Sheet**

# **1206** Package Infrared LED With Inner Lens

#### Features

- Compatible with infrared and vapor phase reflow solder process.
- Small double-end package
- Peak wavelength  $\lambda p=875 \text{nm}$
- Package in 8mm tape on 7" diameter reel
- Pb free
- The product itself will remain within RoHS compliant version.



SIR11-21C/L117/TR8

### Descriptions

- SIR11-21C/L117/TR8 is an infrared emitting diode in miniature SMD package which is molded in a water clear plastic with flat top view lens.
- The device is spectrally matched with silicon photodiode and phototransistor.

### Applications


- PCB mounted infrared sensor
- Infrared remote control units with high power requirement
- Scanner
- Infrared applied system

#### **Device Selection Guide**

LED Part No.	Chip Material	Lens Color	
SIR	GaAlAs	Water clear	



### **Package Dimensions**

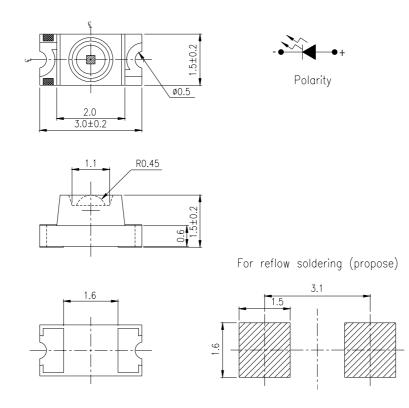

**Notes:** 1.All dimensions are in millimeters 2.Tolerances unless dimensions ±0.1mm

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Units
Continuous Forward Current	$I_{\rm F}$	65	mA
Reverse Voltage	V <sub>R</sub>	5	V
Operating Temperature	T <sub>opr</sub>	-25 ~ +85	°C
Storage Temperature	T <sub>stg</sub>	-40 ~ +85	°C
Soldering Temperature	T <sub>sol</sub>	260	°C
Power Dissipation at(or below)	P <sub>d</sub>	110	mW
25°C Free Air Temperature			

**Notes:** \* Soldering time  $\leq$  5 seconds.

http://www.everlight.com Prepared date : 07-20-2005



Parameter	Symbol	Condition	Min.	Тур.	Max.	Units
Radiant Intensity	Ee	I <sub>F</sub> =20mA	1.45	1.8		mW /sr
Peak Wavelength	λp	I <sub>F</sub> =20mA		875		nm
Spectral Bandwidth	Δλ	I <sub>F</sub> =20mA		42		nm
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =20mA		1.3	1.7	V
Reverse Current	I <sub>R</sub>	V <sub>R</sub> =5V			10	$\mu A$
Optical rise and fall time	$t_r/t_f$	I <sub>F</sub> =100mA		25	35	ns
View Angle	2 <del>0</del> 1/2	I <sub>F</sub> =20mA		130		deg

## **Electro-Optical Characteristics (Ta=25°C)**




### **Typical Electro-Optical Characteristics Curves**

Fig.1 Forward Current vs.

Fig.2 Spectral Distribution


Ambient Temperature

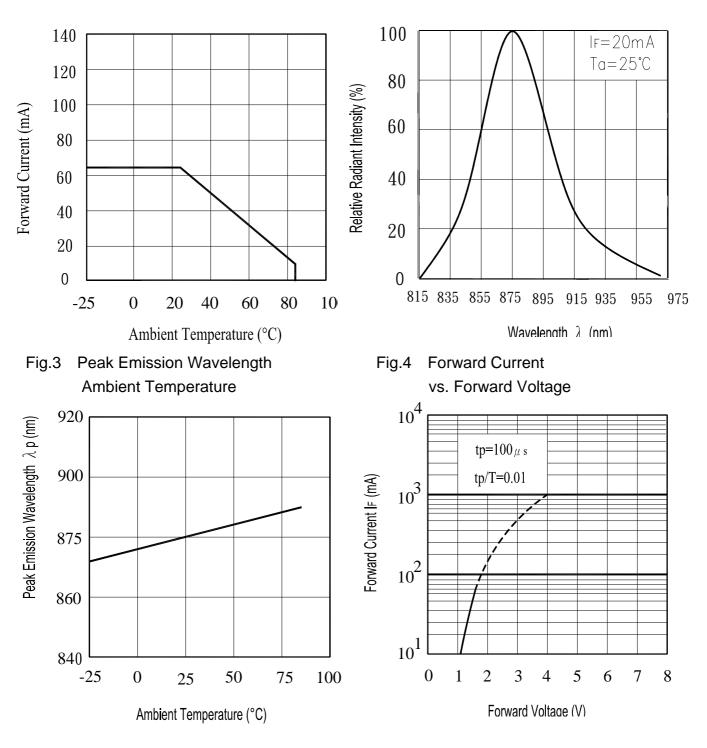

Everlight Electronics Co., Ltd. Device No : DTS-011-122 http://www.everlight.com Prepared date : 07-20-2005 Rev 2 Page: 4 of 10 Prepared by : Jaine Tsai



### **Typical Electro-Optical Characteristics Curves**

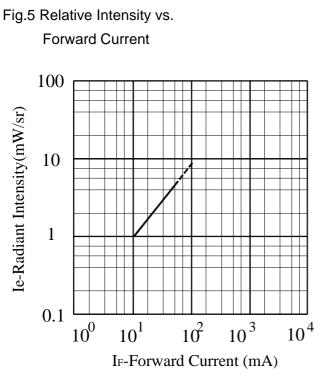




Fig.6 Relative Radiant Intensity vs. Angular Displacement  $-20^{\circ} - 10^{\circ} 0^{\circ} 10^{\circ} 20^{\circ}$ 





Fig.8 Forward Current vs. Ambient Temperature(°C)



Everlight Electronics Co., Ltd. Device No : DTS-011-122 http://www.everlight.com Prepared date : 07-20-2005 Rev 2 Page: 5 of 10 Prepared by : Jaine Tsai

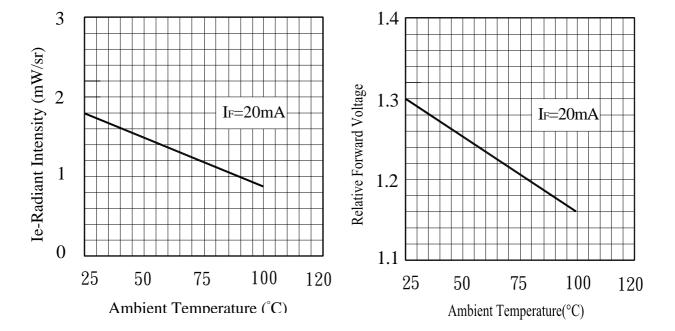


### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at  $30^{\circ}$ C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

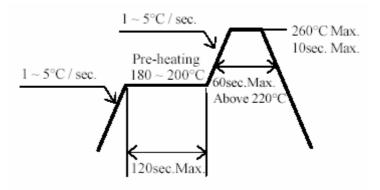

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

http://www.everlight.com Prepared date : 07-20-2005




4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $280^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

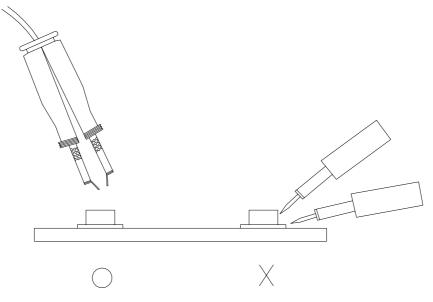



#### **Reliability Test Item And Condition**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%


LTPD: 10%

NO.	Item	Test Conditions	Test Hours/	Sample	Failure	Ac/Re
			Cycles	Sizes	Judgement	
					Criteria	
1	REFLOW	TEMP. : $260^{\circ}C\pm 5^{\circ}C$	6Mins	22pcs		0/1
		5secs			$I_R \ge U \times 2$	
2	Temperature Cycle	H : 100°C 15mins	50Cycles	22pcs	$Ee \leq Lx0.8$	0/1
		5mins	-		$V_F \ge U x 1.2$	
		L : -40°C 15mins				
3	Thermal Shock	H :+100°C ▲ 5mins	50Cycles	22pcs	U : Upper	0/1
		▼ 10secs	-		Specification	
		$L:-10^{\circ}C$ 5mins			Limit	
4	High Temperature	<b>TEMP.</b> : +100°C	1000hrs	22pcs	L: Lower	0/1
	Storage				Specification	
5	Low Temperature	TEMP. ∶ -40°C	1000hrs	22pcs	Limit	0/1
	Storage					
6	DC Operating Life	I <sub>F</sub> =20mA	1000hrs	22pcs	]	0/1
7	High Temperature/	85°C / 85% R.H	1000hrs	22pcs		0/1
	High Humidity					


http://www.everlight.com Prepared date : 07-20-2005



#### **Package Dimensions**

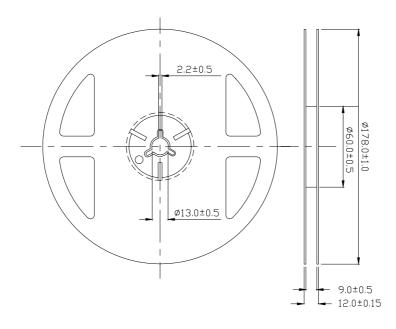

#### **Taping Dimensions**

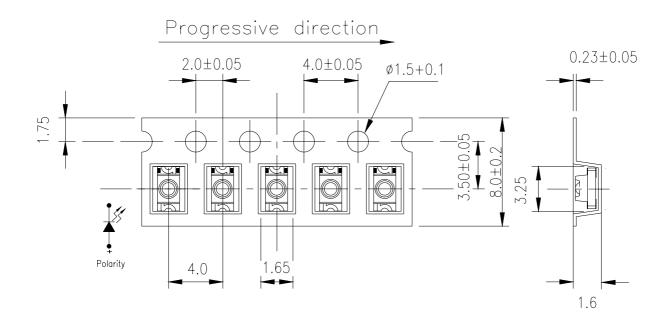

#### Unit: mm

Everlight Electronics Co., Ltd. Device No : DTS-011-122 http://www.everlight.com Prepared date : 07-20-2005 Rev 2Page: 9 of 10Prepared by : Jaine Tsai



## **Packing Quantity Specification**

 $1.2000 Pcs/1 Volume \ , \ 1 Volume/1 Bag$ 

2.10Boxes/1Carton

### Label Form Specification



CPN: Customer's Production Number P/N : Production Number QTY: Packing Quantity CAT: Ranks HUE: Peak Wavelength REF: Reference LOT No: Lot Number MADE IN TAIWAN: Production Place

### Notes

- 1. Above specification may be changed without notice. EVERLIGHT will reserve authority on material change for above specification.
- 2. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 3. These specification sheets include materials protected under copyright of EVERLIGHT corporation. Please don't reproduce or cause anyone to reproduce them without EVERLIGHT's consent.

**EVERLIGHT ELECTRONICS CO., LTD.** Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C *Tel:* 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http:*\\www.everlight.com

Everlight Electronics Co., Ltd. Device No : DTS-011-122 http://www.everlight.com Prepared date : 07-20-2005 Rev 2Page: 10 of 10Prepared by : Jaine Tsai