Technical Data Sheet

Right Angle Lens Chip LED with Bi-Color(Multi-Color)

Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

Descriptions


- The 12-22 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


Device Selection Guide

Chip Type Material			Resin Color	
		Emitted Color		
Y2	AlGaInP	Brilliant Yellow		
ВН	InGaN	Blue	Water Clear	



Revision LifecyclePhase:正式發行


http://www.everlight.com Rev 1 Page: 1 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0



12-22/Y2BHC-A30/2C

12-22/Y2BHC-A30/2C

Package Outline Dimensions

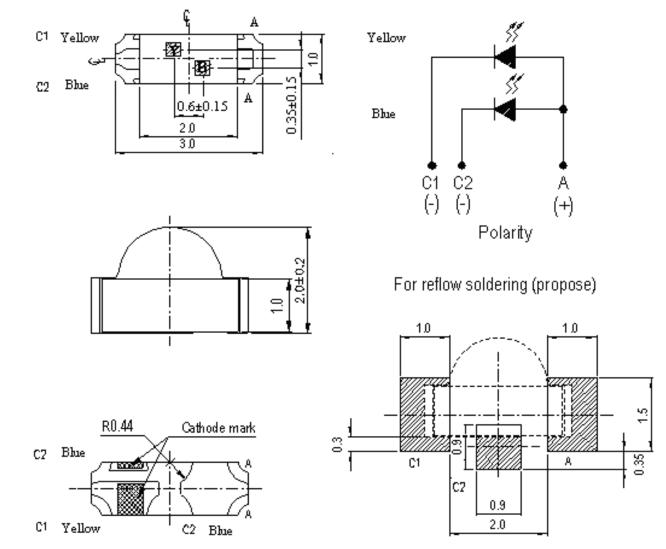

Note: The tolerances unless mentioned is ±0.1mm,Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com Rev 1 Page: 2 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C

Parameter	Symbol	Rating	Unit	
Reverse Voltage	V _R	5	V	
	т	Y2:25	mA	
Forward Current	$I_{ m F}$	BH:25		
Peak Forward Current	т	Y2:60	mA	
(Duty 1/10 @1KHz)	I_{FP}	BH:100		
Dower Dissinction	Pd	Y2:60	mW	
Power Dissipation	Pu	BH:110		
Electrostatic Discharge (UDM)	ESD	Y2:2000	V	
Electrostatic Discharge(HBM)	ESD	BH:150		
Operating Temperature	Topr	-40 ~ +85		
Storage Temperature	Tstg	-40 ~ +90		
	T 1	Reflow Soldering : 260	for 10 sec.	
Soldering Temperature	Tsol	Hand Soldering : 350	for 3 sec.	

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 **Revision 1** LifecyclePhase:正式發行 http://www.everlight.com

Rev 1 Page: 3 of 12

Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C

Electro-Optical Characteristics (Ta=25)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
	Y2	45.0		112		
Luminous Intensity	I _V				mcd	
	BH	28.5		72.0		
Viewing Angle	2 1/2		120		deg	
	Y2		591			
Peak Wavelength	р				nm	
	BH		468			
	Y2		589			
Dominant Wavelength	d				nm	I _F =20mA
-	u					IF-20IIIA
	BH		470			
	Y2		15			1
Spectrum Radiation Bandwidth					nm	
Danawidan	BH		35	TI		
						1
	Y2	1.70	2.0	2.4		
Forward Voltage	V _F			11	V	
	BH	2.7	3.3	3.7		
	Y2			10		
Reverse Current	I _R				μA	V _R =5V
	BH			50		

Notes:

1.Tolerance of Luminous Intensity ±11%

Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C

Bin Range Of Luminous Intensity

T	7	1
	Ĺ	4

Bin	Min	Max	Unit	Condition	
Р	45.0	72.0		I 20 A	
Q	72.0	112	mcd	I _F =20mA	

BH

Bin	Min	Max	Unit	Condition	
Ν	28.5	45.0			
Р	45.0	72.0	mcd	I _F =20mA	

Notes:

1. Tolerance of Luminous Intensity ±11%


http://www.everlight.com

Rev 1 Page: 5 of 12

Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C


Typical Electro-Optical Characteristics Curves Y2

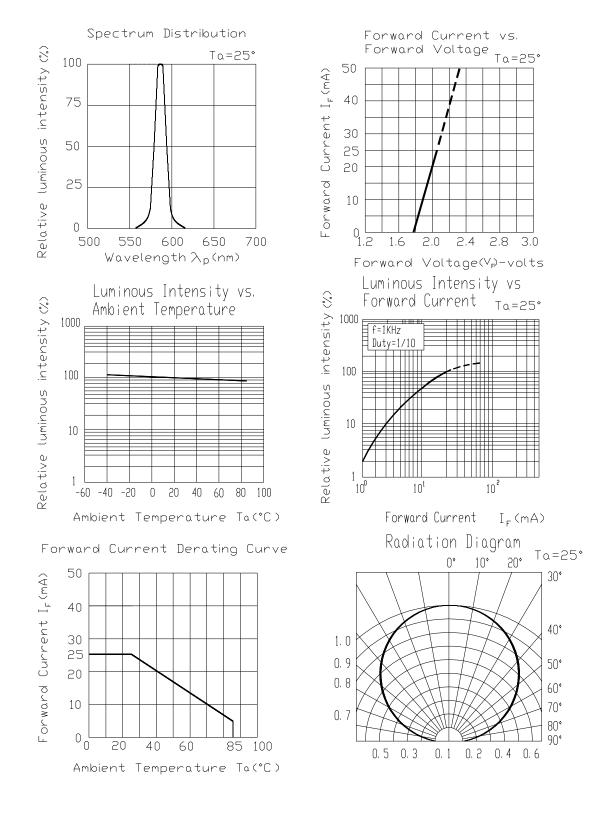

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com Rev 1 Page: 6 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C

Typical Electro-Optical Characteristics Curves BH

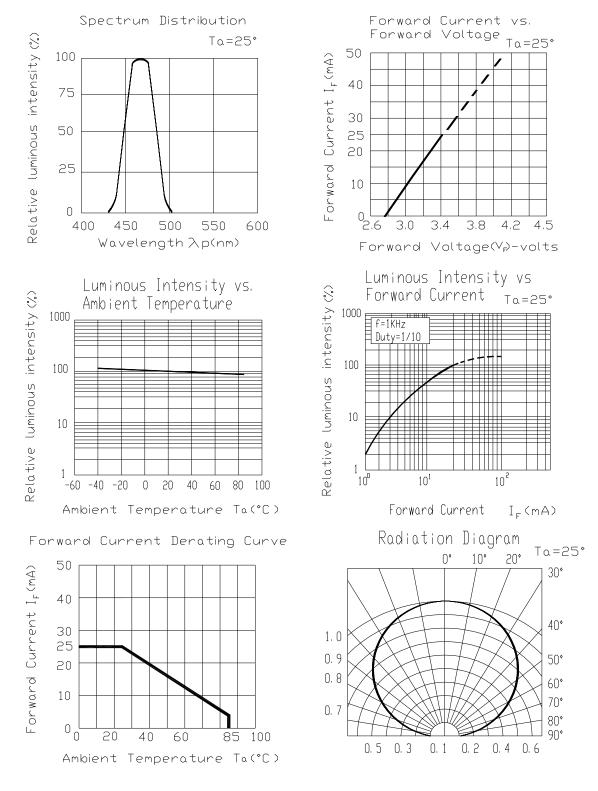

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com Rev 1 Page: 7 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

Label explanation


CAT: Luminous Intensity Rank

HUE: Dom. Wavelength Rank

REF: Forward Voltage Rank



12-22/Y2BHC-A30/2C

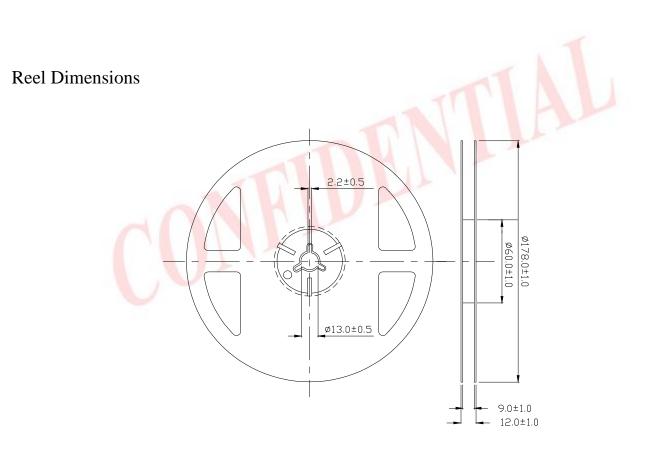


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com Rev 1 Page: 8 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C


Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

Progressive direction

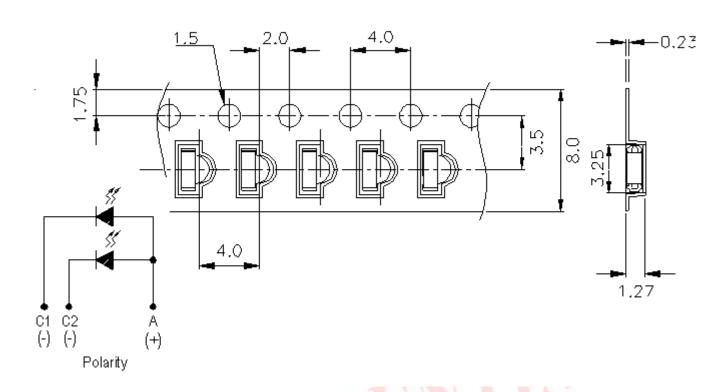

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

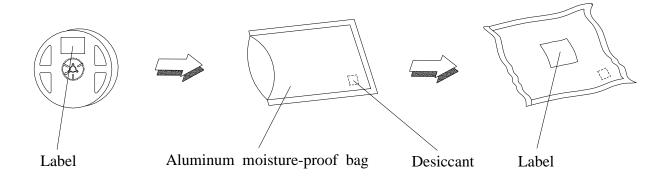

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com Rev 1 Page: 9 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0

12-22/Y2BHC-A30/2C

Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260 ±5 Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100 15min 5 min L : -40 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H : +100 5min 10 sec L : -10 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	IF = 20 mA	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85 / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行

http://www.everlight.com

Rev 1 Page: 10 of 12

Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0


12-22/Y2BHC-A30/2C

Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
 - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30 or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 or less and 60% RH or less.If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.Baking treatment : 60±5 for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

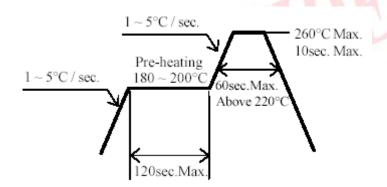

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 **Revision** :1 LifecyclePhase:正式發行 http://www.everlight.com Rev 1 Page: 11 of 12 Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0


12-22/Y2BHC-A30/2C

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350 for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

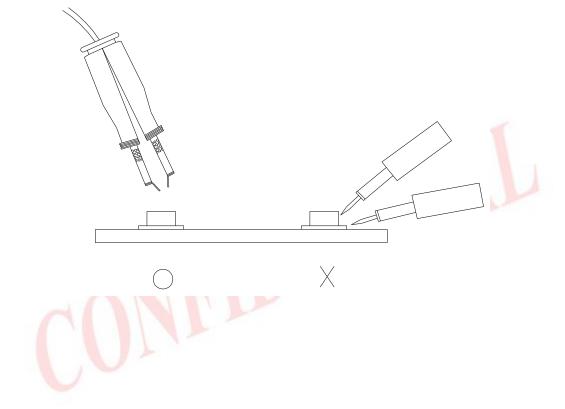

EVERLIGHT ELECTRONICS CO., LTD. Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936 *Fax:* 886-2267-6244, 2267-6189, 2267-6306 *http://www.everlight.com*

Everlight Electronics Co., Ltd. Device No:SZDSE-122-A13 Revision :1 LifecyclePhase:正式發行 http://www.everlight.com

Rev 1 Page: 12 of 12

Prepared date:06-Apr-2007 Prepared by: Zheng Linyan Release Date:2008-09-20 00:16:09.0