
DATASHEET

SMD • B 23-22B/R6B6C-A30/2A



Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Multi-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free .(Br <900 ppm ,Cl <900 ppm , Br+Cl < 1500 ppm).

Description

- The 23-22B SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide

Code	Chip Materials	Emitted Color	Resin Color	
R6	AlGaInP	Brilliant Red	— Water Clear	
B6	InGaN	Blue		

Absolute Maximum Ratings (Ta=25℃)

Parameter	Symbol	Code	Rating	Unit	
Reverse Voltage	V _R		5	V	
Forward Current	I _F	R6	25		
		B6	20	— mA	
Peak Forward Current (Duty 1/10 @1KHz)	I _{FP}	R6	60		
		B6	100	[—] mA	
	Pd	R6	60	- mW	
Power Dissipation		B6	75		
	ESD _{HBM}	R6	2000		
Electrostatic Discharge		B6	150	- V	
Operating Temperature	T _{opr}		-40 ~ +85	°C	
Storage Temperature	Tstg		-40 ~ +90	°C	
Soldering Temperature	Tsol		Reflow Soldering : 260 $^\circ\!\!\mathbb{C}$ for 10 sec. Hand Soldering : 350 $^\circ\!\!\mathbb{C}$ for 3 sec.		

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Code	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	lv	R6	45		112	— mcd	
		B6	45		112	— mcu	
Viewing Angle	20 _{1/2}			130		deg	
Peak Wavelength	λр	R6		632		— nm	_ I _F =20mA _
		B6		468		11111	
Dominant Wavelength	λd	R6		624		— nm	
		B6		470		11111	
Spectrum Radiation Bandwidth	∆λ	R6		20		— nm	
		B6		25		11111	
Forward Voltage	V _F —	R6	1.7	2.0	2.4	— V	
		B6	2.7	3.3	3.7	v	
Reverse Current	I _R	R6			10	— μΑ	V _R =5V
		B6			50	μn	v R-0 v

Note:

1.Tolerance of Luminous Intensity: ±11%

R6 Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition	
Р	45.0	72.0		I _F =20mA	
Q	72.0	112	— mcd		


B6 Bin Range of Luminous Intensity


Bin Code	Min.	Max.	Unit	Condition
Р	45.0	72.0		
Q	72.0	112	mcd	I _F =20mA

Note:


1.Tolerance of Luminous Intensity: ±11%

Typical Electro-Optical Characteristics Curves R6

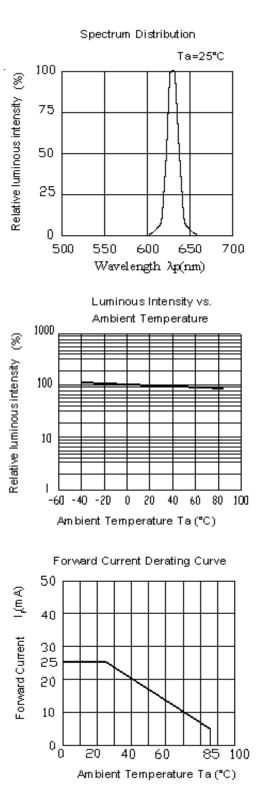

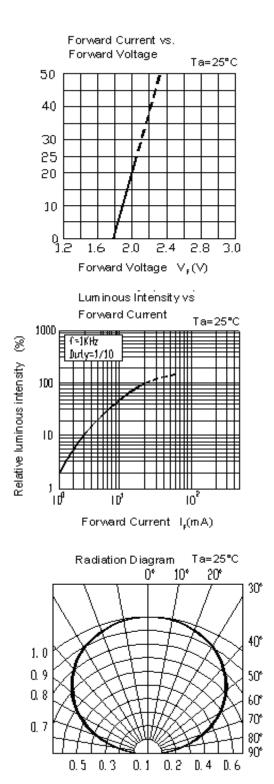

Typical Electro-Optical Characteristics Curves B6

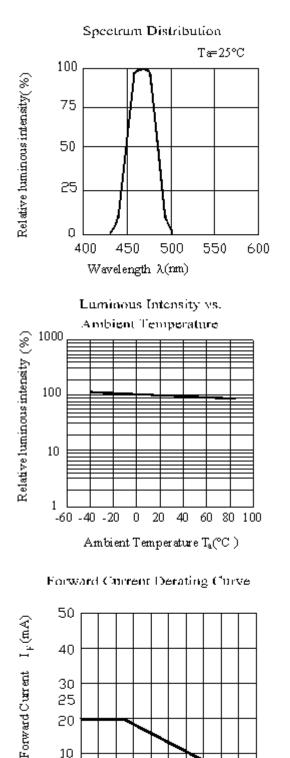


25

20

10


0₀

, ∠υ 40 60 85 Ambient Temperature T_a(°C) 40

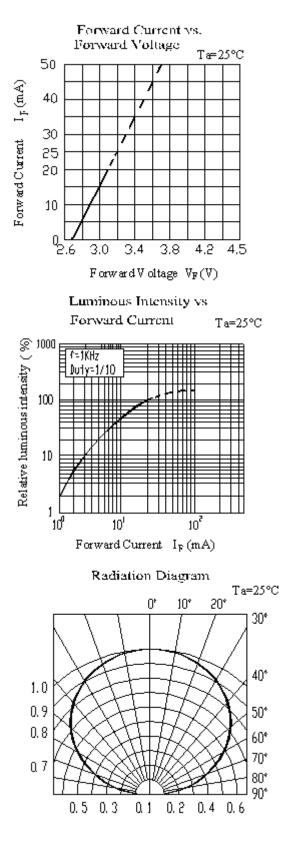

100


Package Dimension

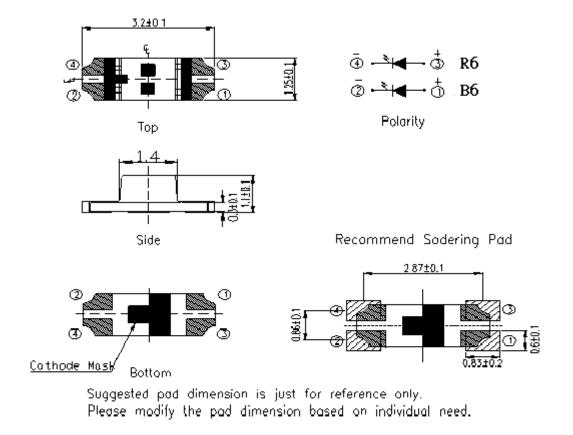

Note: Tolerances unless mentioned ±0.1mm. Unit = mm




Moisture Resistant Packing Materials Label Explanation



CPN: Customer's Product Number


- P/N: Product Number
- QTY: Packing Quantity
- CAT: Luminous Intensity Rank
- HUE: Chromaticity Coordinates & Dom. Wavelength Rank
- REF: Forward Voltage Rank
- · LOT No: Lot Number

Reel Dimensions

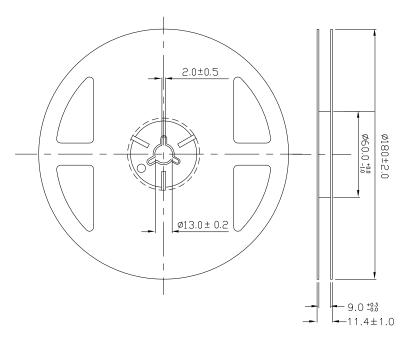


Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

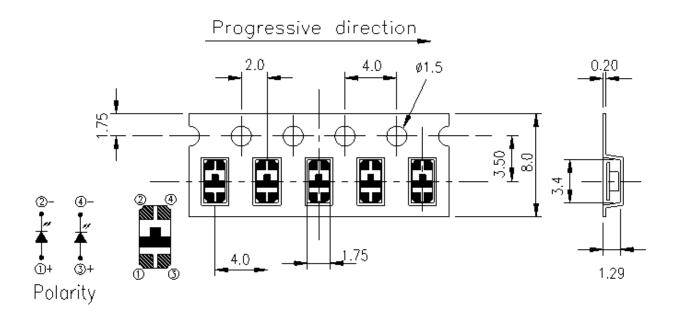

Note: The tolerances unless mentioned is ± 0.1 mm ,Unit = mm

Moisture Resistant Packaging

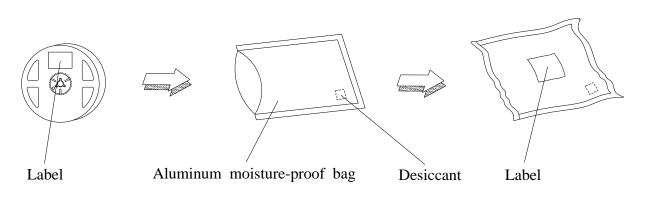




Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 After opening the package: The LEDs should be kept at 30° C or less and 60%RH or less.
- 2.3 The LEDs should be used within 168 hours (7days) after opening the package .
- If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment : 60±5℃ for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

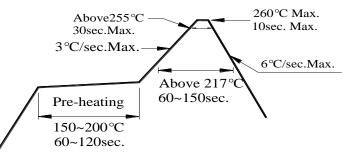


- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.





Application Restrictions

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact Everlight before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.

DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- 3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
- 4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- 6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.