

TRANSIENT VOLTAGE SUPPRESSOR

BREAKDOWN VOLTAGE: 6.12 --- 594 V

PEAK PULSE POWER: 600 W


FEATURES

- ◇ Plastic package has underwriters laboratory flammability classification 94V-0
- ◇ 600W peak pulse power capability with a 10/1000µs waveform, repetition rate (duty cycle): 0.01%
- ◇ Excellent clamping capability
- ◇ Low incremental surge resistance
- ◇ Fast response time: typically less than 1.0ps from 0 Volts to $V_{(BR)}$ for uni-directional and 5.0ns for bi-directional types
- ◇ Typical I_D less than 1 µA above 10V
- ◇ High temperature soldering guaranteed: 265 °C / 10 seconds, 0.375"(9.5mm) lead length, 5lbs. (2.3kg) tension

MECHANICAL DATA

- ◇ Case: JEDEC DO-15, molded plastic body over passivated junction
- ◇ Terminals: Axial leads, solderable per MIL-STD-750, method 2026
- ◇ Polarity: for uni-directional types the color band denotes the cathode, which is positive with respect to the anode under normal TVS operation
- ◇ Weight: 0.015 ounces, 0.39 grams
- ◇ Mounting position: any

DO-15

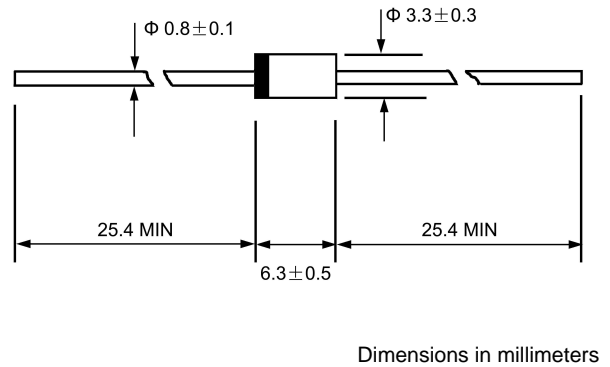

DEVICES FOR BIDIRECTIONAL APPLICATIONS

For bi-directional use C or CA suffix for types P6KE 6.8 thru types P6KE 540 (e.g. P6KE 6.8CA, P6KE 550CA).

Electrical characteristics apply in both directions.

MAXIMUM RATINGS AND CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOL | VALUE | UNIT |
|---|----------------|-------------|------|
| Peak power dissipation with a 10/1000µs waveform (NOTE 1, FIG.1) | P_{PPM} | Minimum 600 | W |
| Peak pulse current with a 10/1000µs waveform (NOTE 1) | I_{PPM} | See table | A |
| Steady state power dissipation at $T_L=75^\circ\text{C}$ Lead lengths 0.375"(9.5mm) (NOTE 2) | $P_{M(AV)}$ | 5.0 | W |
| Peak forward surge current, 8.3ms single half Sine-wave superimposed on rated load (JEDEC Method) (NOTE 3) | I_{FSM} | 100.0 | A |
| Maximum Instantaneous forward voltage at 50A for unidirectional only (NOTE 4) | V_F | 3.5/5.0 | V |
| Operating junction and storage temperature range | T_J, T_{STG} | -50---+150 | °C |

NOTES: (1) Non-repetitive current pulses, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2

(2) Mounted on copper pad area of 1.6" x 1.6"(40 x 40mm²) per Fig. 5

(3) Measured of 8.3ms single half sine-wave or square wave, duty cycle=4 pulses per minute maximum

(4) $V_F=3.5$ Volt max. for devices of $V_{(BR)} \leq 220V$, and $V_F=5.0$ Volt max. for devices of $V_{(BR)} > 220V$

www.galaxycn.com

ELECTRICAL CHARACTERISTICS at(T_A=25 unless otherwise noted)

TABLE 1

| Device Type | Breakdown Voltage V _(BR) (V) (NOTE1) | | Test Current at I _T (mA) | Stand-off Voltage V _{WM} (V) | Maximum Reverse Leakage at V _{WM} I _D (μA) (NOTE3) | Maximum Pead Pulse I _{PPM} (A) (NOTE2) | Maximum Clamping Voltage at I _{PPM} V _C (V) | Maximum Temperature Coefficient of V _(BR) (%/) |
|-------------|---|------|-------------------------------------|---------------------------------------|--|---|---|--|
| | MIN | MAX | | | | | | |
| P6KE6.8 | 6.12 | 7.48 | 10.0 | 5.50 | 1000 | 55.6 | 10.8 | 0.057 |
| P6KE6.8A | 6.45 | 7.14 | 10.0 | 5.80 | 1000 | 57.1 | 10.5 | 0.057 |
| P6KE7.5 | 6.75 | 8.25 | 10.0 | 6.05 | 500 | 51.3 | 11.7 | 0.061 |
| P6KE7.5A | 7.13 | 7.88 | 10.0 | 6.40 | 500 | 53.1 | 11.3 | 0.061 |
| P6KE8.2 | 7.38 | 9.02 | 10.0 | 6.63 | 200 | 48.0 | 12.5 | 0.065 |
| P6KE8.2A | 7.79 | 8.61 | 10.0 | 7.02 | 200 | 49.6 | 12.1 | 0.060 |
| P6KE9.1 | 8.19 | 10.0 | 1.0 | 7.37 | 50 | 43.5 | 13.8 | 0.068 |
| P6KE9.1A | 8.65 | 9.55 | 1.0 | 7.78 | 50 | 44.8 | 13.4 | 0.068 |
| P6KE10 | 9.0 | 11.0 | 1.0 | 8.10 | 10 | 40.0 | 15.0 | 0.073 |
| P6KE10A | 9.5 | 10.5 | 1.0 | 8.55 | 10 | 41.4 | 14.5 | 0.073 |
| P6KE11 | 9.9 | 12.1 | 1.0 | 8.92 | 5.0 | 37.0 | 16.2 | 0.075 |
| P6KE11A | 10.5 | 11.6 | 1.0 | 9.40 | 5.0 | 38.5 | 15.6 | 0.075 |
| P6KE12 | 10.8 | 13.2 | 1.0 | 9.72 | 5.0 | 34.7 | 17.3 | 0.078 |
| P6KE12A | 11.4 | 12.6 | 1.0 | 10.2 | 5.0 | 35.9 | 16.7 | 0.078 |
| P6KE13 | 11.7 | 14.3 | 1.0 | 10.5 | 5.0 | 31.6 | 19.0 | 0.081 |
| P6KE13A | 12.4 | 13.7 | 1.0 | 11.1 | 5.0 | 33.0 | 18.2 | 0.081 |
| P6KE15 | 13.5 | 16.5 | 1.0 | 12.1 | 5.0 | 27.3 | 22.0 | 0.084 |
| P6KE15A | 14.3 | 15.8 | 1.0 | 12.8 | 5.0 | 28.3 | 21.2 | 0.084 |
| P6KE16 | 14.4 | 17.6 | 1.0 | 12.9 | 5.0 | 25.5 | 23.6 | 0.086 |
| P6KE16A | 15.2 | 16.8 | 1.0 | 13.6 | 5.0 | 26.7 | 22.5 | 0.086 |
| P6KE18 | 16.2 | 19.8 | 1.0 | 14.5 | 5.0 | 22.6 | 26.5 | 0.088 |
| P6KE18A | 17.1 | 18.9 | 1.0 | 15.3 | 5.0 | 23.8 | 26.2 | 0.088 |
| P6KE20 | 18.0 | 22.0 | 1.0 | 16.2 | 5.0 | 20.6 | 29.1 | 0.090 |
| P6KE20A | 19.0 | 21.0 | 1.0 | 17.1 | 5.0 | 21.7 | 27.7 | 0.090 |
| P6KE22 | 19.8 | 24.2 | 1.0 | 17.8 | 5.0 | 18.8 | 31.9 | 0.092 |
| P6KE22A | 20.9 | 23.1 | 1.0 | 18.8 | 5.0 | 19.6 | 30.6 | 0.092 |
| P6KE24 | 21.6 | 26.4 | 1.0 | 19.4 | 5.0 | 17.3 | 34.7 | 0.094 |
| P6KE24A | 22.8 | 25.2 | 1.0 | 20.5 | 5.0 | 18.1 | 33.2 | 0.094 |
| P6KE27 | 24.3 | 29.7 | 1.0 | 21.8 | 5.0 | 15.3 | 39.1 | 0.096 |
| P6KE27A | 25.7 | 28.4 | 1.0 | 23.1 | 5.0 | 16.0 | 37.5 | 0.096 |
| P6KE30 | 27.0 | 33.0 | 1.0 | 24.3 | 5.0 | 13.8 | 43.5 | 0.097 |
| P6KE30A | 28.5 | 31.5 | 1.0 | 25.6 | 5.0 | 14.5 | 41.4 | 0.097 |
| P6KE33 | 29.7 | 36.3 | 1.0 | 26.8 | 5.0 | 12.6 | 47.7 | 0.098 |
| P6KE33A | 31.4 | 34.7 | 1.0 | 28.2 | 5.0 | 13.1 | 45.7 | 0.098 |
| P6KE36 | 32.4 | 39.6 | 1.0 | 29.1 | 5.0 | 11.5 | 52.0 | 0.099 |
| P6KE36A | 34.2 | 37.8 | 1.0 | 30.8 | 5.0 | 12.0 | 49.9 | 0.099 |
| P6KE39 | 35.1 | 42.9 | 1.0 | 31.6 | 5.0 | 10.6 | 56.4 | 0.100 |
| P6KE39A | 37.1 | 41.0 | 1.0 | 33.3 | 5.0 | 11.1 | 53.9 | 0.100 |
| P6KE43 | 38.7 | 47.3 | 1.0 | 34.8 | 5.0 | 9.7 | 61.9 | 0.101 |
| P6KE43A | 40.9 | 45.2 | 1.0 | 36.8 | 5.0 | 10.1 | 59.3 | 0.101 |
| P6KE47 | 42.3 | 51.7 | 1.0 | 38.1 | 5.0 | 8.8 | 67.8 | 0.101 |
| P6KE47A | 44.7 | 49.4 | 1.0 | 40.2 | 5.0 | 9.3 | 64.8 | 0.101 |
| P6KE51 | 45.9 | 56.1 | 1.0 | 41.3 | 5.0 | 8.2 | 73.5 | 0.102 |
| P6KE51A | 48.5 | 53.6 | 1.0 | 43.6 | 5.0 | 8.6 | 70.1 | 0.102 |
| P6KE56 | 50.4 | 61.6 | 1.0 | 45.4 | 5.0 | 7.5 | 80.5 | 0.103 |
| P6KE56A | 53.2 | 58.8 | 1.0 | 47.8 | 5.0 | 7.8 | 77.0 | 0.103 |
| P6KE62 | 55.8 | 68.2 | 1.0 | 50.2 | 5.0 | 6.7 | 89.0 | 0.104 |
| P6KE62A | 58.9 | 65.1 | 1.0 | 53.0 | 5.0 | 7.1 | 85.0 | 0.104 |
| P6KE68 | 61.2 | 74.8 | 1.0 | 55.1 | 5.0 | 6.1 | 98.0 | 0.104 |
| P6KE68A | 64.6 | 71.4 | 1.0 | 58.1 | 5.0 | 6.5 | 92.0 | 0.104 |
| P6KE75 | 67.5 | 82.5 | 1.0 | 60.7 | 5.0 | 5.6 | 108 | 0.105 |
| P6KE75A | 71.3 | 78.8 | 1.0 | 64.1 | 5.0 | 5.8 | 103 | 0.105 |
| P6KE82 | 73.8 | 90.2 | 1.0 | 66.4 | 5.0 | 5.1 | 118 | 0.105 |
| P6KE82A | 77.9 | 86.1 | 1.0 | 70.1 | 5.0 | 5.3 | 113 | 0.105 |

| Device Type | Breakdown Voltage V _(BR) (V) (NOTE1) | | Test Current at I _T (mA) | Stand-off Voltage V _{WM} (V) | Maximum Reverse Leakage at V _{WM} I _D (μA) (NOTE3) | Maximum Peak Pulse I _{PPM} (A) (NOTE2) | Maximum Clamping Voltage at I _{PPM} V _C (V) | Maximum Temperature Coefficient of V _(BR) (%/) |
|-------------|---|-------|--|--|--|---|--|---|
| | MIN | MAX | | | | | | |
| P6KE91 | 81.9 | 100 | 1.0 | 73.7 | 5.0 | 4.6 | 131 | 0.106 |
| P6KE91A | 86.5 | 95.5 | 1.0 | 77.8 | 5.0 | 4.8 | 125 | 0.106 |
| P6KE100 | 90.0 | 110 | 1.0 | 81.0 | 5.0 | 4.2 | 144 | 0.106 |
| P6KE100A | 95.0 | 105 | 1.0 | 85.5 | 5.0 | 4.4 | 137 | 0.106 |
| P6KE110 | 99.0 | 121 | 1.0 | 89.2 | 5.0 | 3.8 | 158 | 0.107 |
| P6KE110A | 105 | 116 | 1.0 | 94.0 | 5.0 | 3.9 | 152 | 0.107 |
| P6KE120 | 108 | 132 | 1.0 | 97.2 | 5.0 | 3.5 | 173 | 0.107 |
| P6KE120A | 114 | 126 | 1.0 | 102 | 5.0 | 3.6 | 165 | 0.107 |
| P6KE130 | 117 | 143 | 1.0 | 105 | 5.0 | 3.2 | 187 | 0.107 |
| P6KE130A | 124 | 137 | 1.0 | 111 | 5.0 | 3.6 | 179 | 0.107 |
| P6KE150 | 135 | 165 | 1.0 | 121 | 5.0 | 2.8 | 215 | 0.108 |
| P6KE150A | 143 | 158 | 1.0 | 128 | 5.0 | 2.9 | 207 | 0.108 |
| P6KE160 | 144 | 176 | 1.0 | 130 | 5.0 | 2.6 | 230 | 0.108 |
| P6KE160A | 152 | 168 | 1.0 | 136 | 5.0 | 2.7 | 219 | 0.108 |
| P6KE170 | 153 | 187 | 1.0 | 138 | 5.0 | 2.5 | 244 | 0.108 |
| P6KE170A | 162 | 179 | 1.0 | 145 | 5.0 | 2.6 | 234 | 0.108 |
| P6KE180 | 162 | 198 | 1.0 | 146 | 5.0 | 2.3 | 258 | 0.108 |
| P6KE180A | 171 | 189 | 1.0 | 154 | 5.0 | 2.4 | 246 | 0.108 |
| P6KE200 | 180 | 220 | 1.0 | 162 | 5.0 | 2.1 | 287 | 0.108 |
| P6KE200A | 190 | 210 | 1.0 | 171 | 5.0 | 2.2 | 274 | 0.108 |
| P6KE220 | 198 | 242 | 1.0 | 175 | 5.0 | 1.7 | 344 | 0.108 |
| P6KE220A | 209 | 231 | 1.0 | 185 | 5.0 | 1.8 | 328 | 0.108 |
| P6KE250 | 225 | 275 | 1.0 | 202 | 5.0 | 1.7 | 360 | 0.110 |
| P6KE250A | 237 | 263 | 1.0 | 214 | 5.0 | 1.7 | 344 | 0.110 |
| P6KE300 | 270 | 330 | 1.0 | 243 | 5.0 | 1.4 | 430 | 0.110 |
| P6KE300A | 285 | 315 | 1.0 | 256 | 5.0 | 1.4 | 414 | 0.110 |
| P6KE350 | 315 | 385 | 1.0 | 284 | 5.0 | 1.2 | 504 | 0.110 |
| P6KE350A | 332 | 368 | 1.0 | 300 | 5.0 | 1.2 | 482 | 0.110 |
| P6KE400 | 360 | 440 | 1.0 | 324 | 5.0 | 1.0 | 574 | 0.110 |
| P6KE400A | 380 | 420 | 1.0 | 342 | 5.0 | 1.1 | 548 | 0.110 |
| P6KE440 | 396 | 484 | 1.0 | 356 | 5.0 | 0.95 | 631 | 0.110 |
| P6KE440A | 418 | 462 | 1.0 | 376 | 5.0 | 1.0 | 602 | 0.110 |
| P6KE480 | 432 | 528 | 1.0 | 389 | 5.0 | 0.88 | 686 | 0.110 |
| P6KE480A | 456 | 504 | 1.0 | 408 | 5.0 | 0.91 | 658 | 0.110 |
| P6KE510 | 459 | 561 | 1.0 | 413 | 5.0 | 0.82 | 729 | 0.110 |
| P6KE510A | 485 | 535 | 1.0 | 434 | 5.0 | 0.86 | 698 | 0.110 |
| P6KE540 | 486 | 594 | 1.0 | 437 | 5.0 | 0.78 | 772 | 0.110 |
| P6KE540A | 513 | 567 | 1.0 | 459 | 5.0 | 0.81 | 740 | 0.110 |
| P6KE550 | 495 | 605 | 1.0 | 470 | 5.0 | 0.76 | 786 | 0.110 |
| P6KE550A | 522.5 | 577.5 | 1.0 | 467 | 5.0 | 0.79 | 760 | 0.110 |

www.galaxycn.com

NOTES:(1) V_(BR) measured after I_T applied for 300 μs, I_T=square wave pulse or equivalent

(2) Surge current waveform per Fig. 3 and derated Fig. 2

(3) For bidirectional types having V_{WM} of 10 volts and less, the I_D limit is doubled

(4) All terms and symbols are consistent with ANSI/ IEEE C62.35

+UL listed for telecom application protection 497B,file number E 136766 f or both uni-directional and bidirectional devices

DESCRIPTION

This P6KE TVS series is a low cost commercial product for use in applications where large voltage transients can permanently damage voltage-sensitive components. The P6KE series device types are designed in a small package size where power and space is a consideration. They are characterized by their high surge capability, extremely fast response time, and low impedance, (R_{on}). Because of the unpredictable nature of transients, and the variation of the impedance with respect to these transients, impedance, per se, is not specified as a parametric value. However, a minimum voltage at low current conditions (BV) and a maximum clamping voltage (V_C) at a maximum peak pulse current is specified.

In some instances, the thermal effect (see V_C Clamping Voltage) may be responsible for 50% to 70%. Of the observed voltage differential when subjected to high current pulses for several duty cycles, thus making a maximum impedance specification in significant.

In case of a severe current overload or abnormal transient beyond the maximum ratings, the Transient Voltage Suppressor will initially fail 'short' thus tripping the system's circuit breaker or fuse while protecting the entire circuit. Curves depicting clamping voltage vs. various current pulses are available from the factory. Extended power curves vs. pulse time are also available.

FIG.1 – PEAK PULSE POWER RATING CURVE

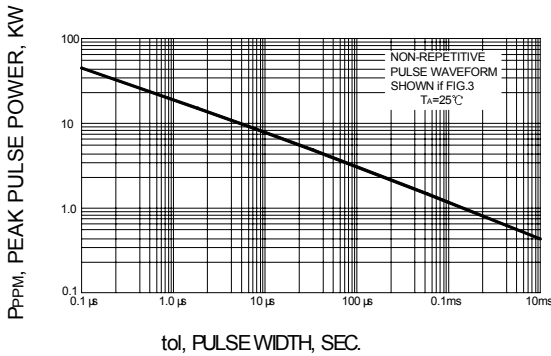


FIG.3 – PULSE WAVEFORM

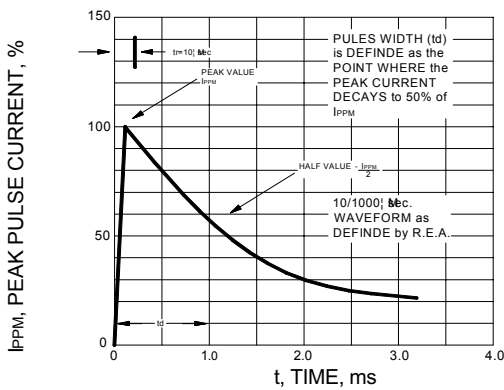


FIG.5 – STEADY STATE POWER DERATING CURVE

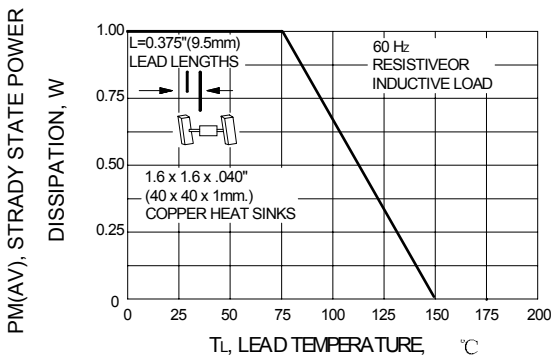


FIG.7 – TYPICAL REVERSE LEAKAGE CHARACTERISTICS

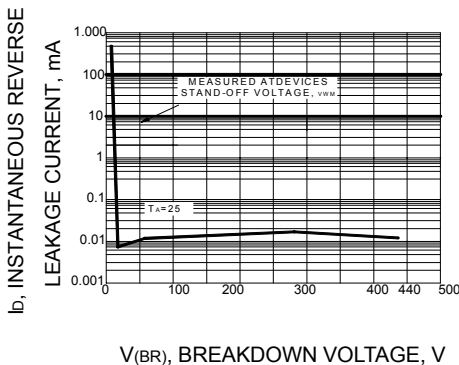


FIG.2 – PULSE DERATING CURVE

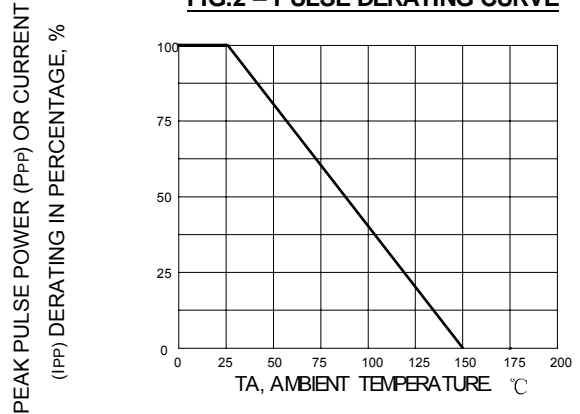


FIG.4 – TYPICAL JUNCTION CAPACITANCE UNIDIRECTIONAL

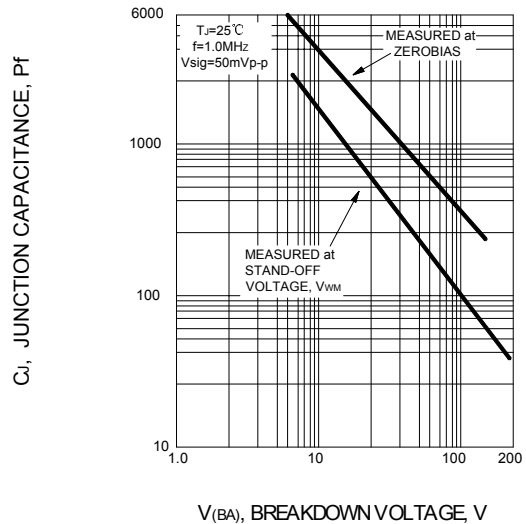


FIG.6 – MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT UNIDIRECTIONAL ONLY

