

**SEMFxx SERIES  
4-Line Transient Voltage Suppressor Array**

Revision:B

**General Description**

The Standard TVS are designed to low voltage, integrated circuits from transients caused by electrostatic discharge (ESD), electrical fast transients (EFT) and other induced voltages.

**Applications**

- Computer Notebooks
- Communication Systems & Cellular Phones
- Printers
- Personal Digital Assistant(PDA)
- Video Equipment

**Features**

- 100 W Peak Pulse Power per Line ( $t_p=8/20\mu s$ )
- Monolithic Structure
- Available in 4 Voltage Types:5V to 24V
- Low Clamping Voltage
- ESD Protection > 40 kilovolts
- Low Leakage Current
- Protects up to Four (4) Bidirectional Lines and Five(5) Unidirectional Lines
- RoHS Compliant on Lead-Free Versions

**Complies with the following standards**

**IEC61000-4-2**

**Level 4 15 kV (air discharge)**

**8 kV(contact discharge)**


**MIL STD 883E - Method 3015-7 Class 3**

**25 kV HBM (Human Body Model)**

**Functional Diagram**



SOT-353




<b>Absolute Ratings @ 25°C Unless Otherwise Specified</b>			
<b>Symbol</b>	<b>Parameter</b>	<b>Value</b>	<b>Units</b>
P <sub>PP</sub>	Peak Pulse Power ( $t_p=8/20\mu s$ )See Figure 1	100	Watts
T <sub>J</sub>	Operating Temperature	-55°C to 150 °C	°C
T <sub>STG</sub>	Storage Temperature	-55°C to 150°C	°C

# SEMFxx SERIES

## Electrical Parameter

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$I_T$	Test Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_F$	Forward Current
$V_F$	Forward Voltage @ $I_F$

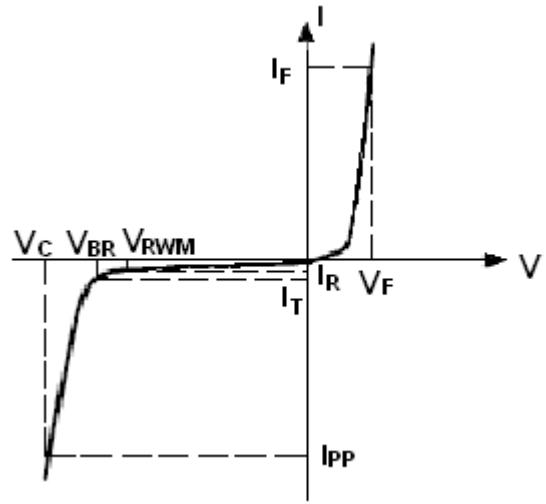

## Electrical Characteristics

Part Numbers	$V_{BR}$			$I_T$	$V_{RWM}$	$I_R$	<b>C</b>
	Min.	Typ.	Max.				Typ. 0v bias
	V	V	V				pF
SEMF3V3	5.3	5.6	5.88	1	3.3	1.0	50
SEMF05	6.1	6.7	7.2	1	5.0	1	35
SEMF12	13.3	14.5	15.0	1	12	1	30

## Typical Characteristics

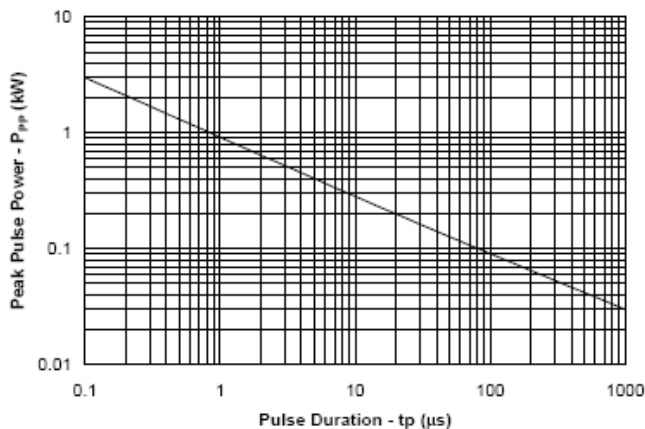


Fig1. Non-Repetitive Peak Pulse Power vs. Pulse Time

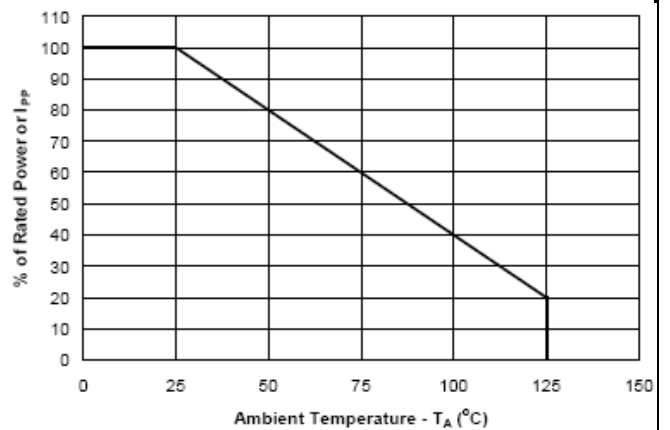


Fig2. Power Derating Curve

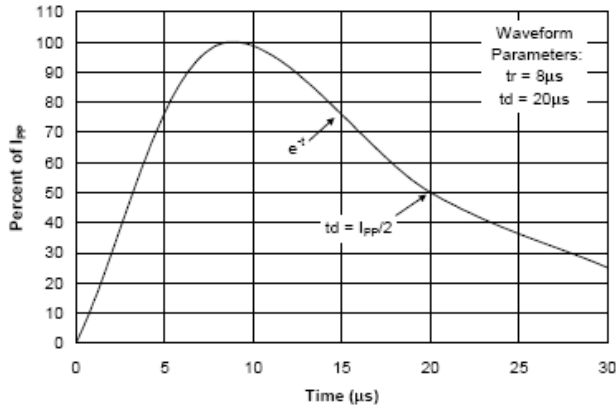


Fig3. Pulse Waveform


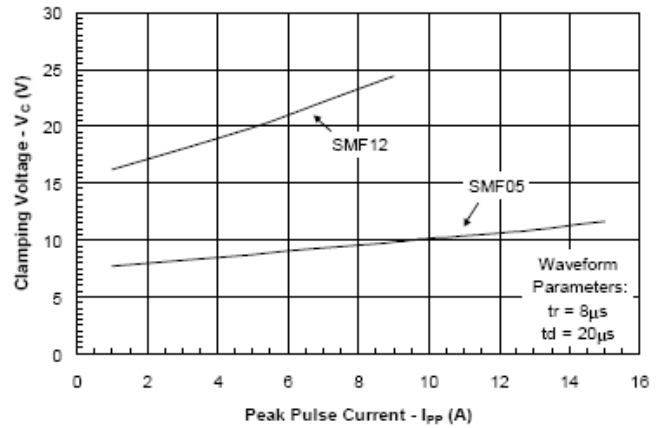


Fig4. Clamping Voltage vs. Peak Pulse Current

## SOT-353 Mechanical Data

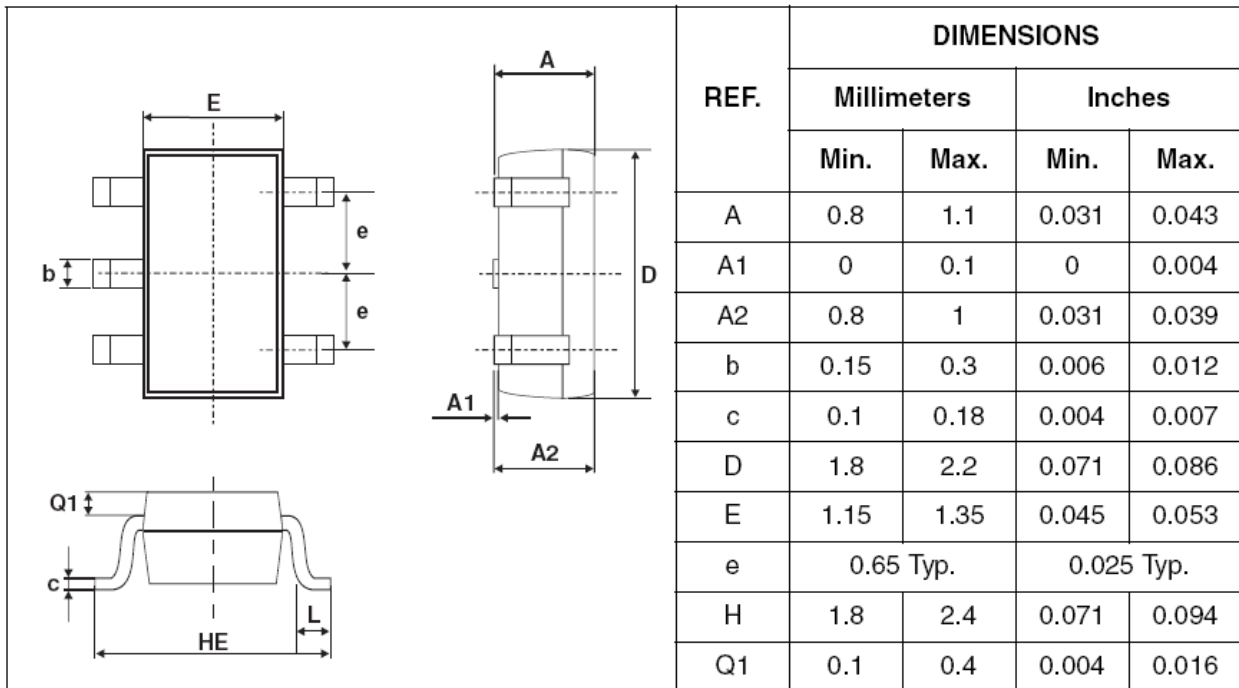

The SINO-IC logo is a registered trademark of ShangHai Sino-IC Microelectronics Co., Ltd.

© 2005 SINO-IC – Printed in China – All rights reserved.

**SHANGHAI SINO-IC MICROELECTRONICS CO., LTD**

**Add:** Building 3, Room 3401-03, No.200 Zhangheng Road, ZhangJiang Hi-Tech Park, Pudong, Shanghai 201203, China

**Phone:** +86-21-33932402 33932403 33932405 33933508 33933608

**Fax:** +86-21-33932401

**Email:** [webmaster@sino-ic.com](mailto:webmaster@sino-ic.com)

**Website:** <http://www.sino-ic.com>

