




PCB Layout(Pattern Side)

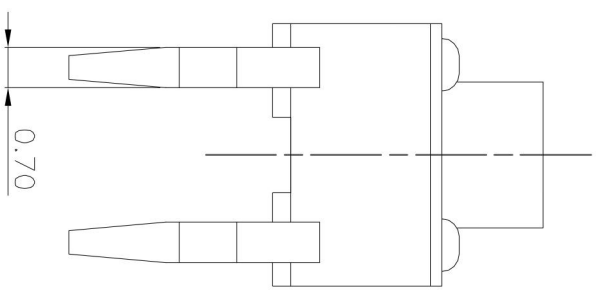

Circuit diagram

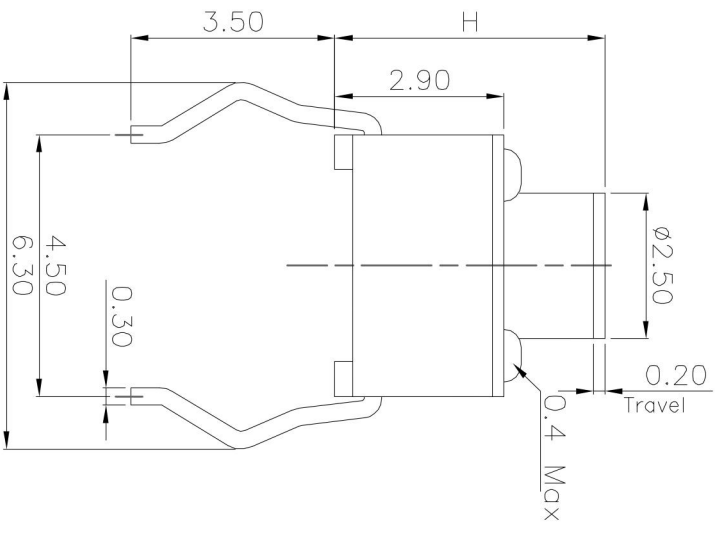

NO.1	
PART NO	H
A	3.8
B	4.3
C	4.8
D	5
E	5.5
F	6
G	6.5
H	7
I	7.5
J	8
K	8.5
L	9

NO.2	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3	
PART NO	MATERIAL/QTY
S	SUS/1PC
C	C5210/1PC
D	SUS/2PCS
F	C5210/2PCS

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

NO.4-NO.5	
PART NO	NOTE
01~99	SERIAL NUMBER

ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
⑤	Terminal	—	4	Brass(0.30t)	Plating silver	—
④	Contact	—	1	F.Ag/SUS	—	—
③	Base	—	1	PA46	Black	—
②	Cover	—	1	SUS	—	—
①	Keystoke	—	1	PA46	Black	—

ECN NO.	REV	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
—	A	—	NEW	—	—	—
APPROVALS DRAWN: <b>王岩</b> DATE: <b>2011.9</b> CHECKED: _____ TITLE: TACT SWITCHS APPROVALS: _____ PART NO. <b>TS-KG09</b> TOLERANCES ARE: 30~81: ±0.30 ANGLE: ±2° UNIT: mm SCALE: 1:1 PROJ:  SHEET 1 OF 1 10~30: ±0.20 5~10: ±0.15 ~ 5: ±0.10						
台湾汉博电子科技有限公司 Taiwan Han Bo Electronic Technology Co.,Ltd.						