



SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

VOLTAGE

80-200 Volts

CURRENT


2 Amperes


FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-O
- · For surface mounted applications
- · Metal to silicon rectifier. majority carrier conduction
- · Low power loss, high efficiency
- · High surge capacity
- Ultra Thin Profile Package for Space Constrained Utilization
- · Package suitable for Automated Handling
- Lead free in comply with EU RoHS 2011/65/EU directives.
- Green molding compound as per IEC61249 Std. . (Halogen Free)

MECHANICAL DATA

- · Case: plastic molded
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- · Approx. Weight: 0.0012 ounces, 0.0328 grams
- · Polarity: Color band denotes cathode end





MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (Ta=25°C unless otherwise noted)

PARAMETER	SYMBOL	BR28F	BR29F	BR210F	BR215F	BR220F	UNITS
Recurrent Peak Reverse Voltage		80	90	100	150	200	V
RMS Voltage		56	63	70	105	140	V
DC Blocking Voltage		80	90	100	150	200	V
Average Forward Current	I _{F(AV)}	2					Α
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I _{FSM}	50					Α
Forward Voltage at 2.0A	V _F	0.8			0.9		V
DC Reverse Current at Rated DC Blocking Voltage	I _R	0.05					mA
Typical Junction Capacitance (VR=4V, f=1MHz)	C _J	75		60	45	pF	
Typical Thermal Resistance ,Junction to Lead (Note 1) Junction to Ambient (Note 1)	$R_{_{\theta JA}}$	20 150				1	°C / W
Operating Junction Temperature and Storage Temperature Range	T_J, T_{STG}	-55 to +150					°C

NOTES

- 1. Mounted on 48cm² copper pad area.
- 2. Mounted on an FR4 PCB, single-sided copper, mini pad.





RATING AND CHARACTERISTIC CURVES




Fig.1 Forward Current Derating Curve




Fig.2 Typical Junction Capacitance




Fig.3 Typical Reverse Characteristics




Fig.4 Typical Reverse Characteristics




Fig.5 Typical Forward Characteristics





Fig.6 Typical Forward Characteristics





MOUNTING PAD LAYOUT

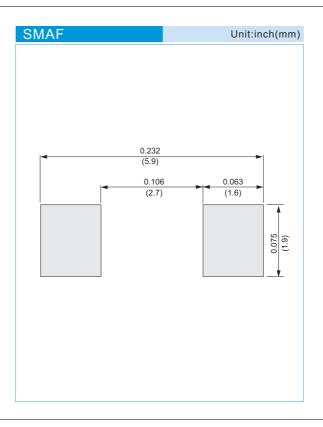

ORDER INFORMATION

Packing information

T/R - 10K per 13" plastic Reel

T/R - 3K per 7" plastic Reel





Part No_packing code_Version

BR28F_R1_00001 BR28F_R2_00001

For example:



Packing Code XX				Version Code XXXXX			
Packing type	1 st Code	Packing size code	2 nd Code	HF or RoHS	1 st Code	2 nd ~5 th Code	
Tape and Ammunition Box (T/B)	Α	N/A	0	HF	0	serial number	
Tape and Reel (T/R)	R	7"	1	RoHS	1	serial number	
Bulk Packing (B/P)	В	13"	2				
Tube Packing (T/P)	Т	26mm	X				
Tape and Reel (Right Oriented) (TRR)	S	52mm	Y				
Tape and Reel (Left Oriented) (TRL)	L	PANASERT T/B CATHODE UP (PBCU)	U				
FORMING	F	PANASERT T/B CATHODE DOWN (PBCD)	D				





Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.