ISO9001: 2000	ISO14001: 2004

Title. TACT SWITCH

Product Model. TS-1086EV

Customer's Part NO.

Customer's Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:


APPROVE	REVIEW	POLT
王凱	李成功	許志明

XUNPU ELECTRONICS CO.,LTD



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		TS-1086EV	TACT SWITCH	

产品符合ROHS

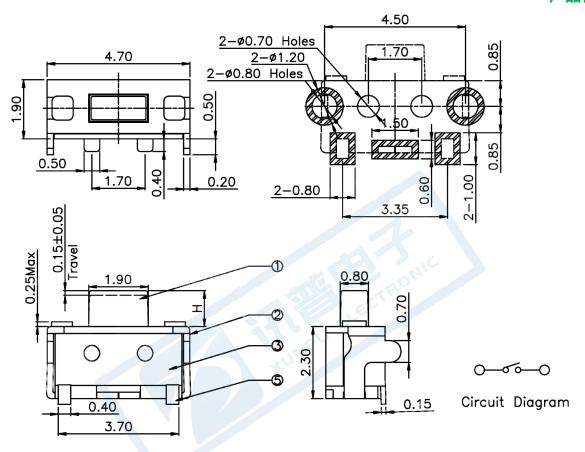

General tolerance: ±0.2mm

NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
1	Terminal	Phosphor Bronze		2	Plating silver
2	Cover	Brass		1	Plating Sn
3	Contact	F.Ag/C5210		1	
4	Base	PA46		1	White
5	Keystoke	PA46		1	White
6	Dust cover	Kapton Film		1	

APPROVE BY 王凱 12.08	21 CHECKED BY	李成功 12.05.21	PRPARE BY	許志明 12.05.21
---------------------	---------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		TS-1086EV	TACT SWITCH	

A Specification & meanings

The name of the tact switch is composed by type and specification, the particular meaning of the type, specification and code is as follows.

TS-1086EV-	
	Operating force (refer to chart 2)
	Product height (refer to chart 1)

1. Product height: It is denoted by three figures:

Code	Product height(mm)	Code	Product height(mm)	Code	Product height(mm)
012	1.2				
015	1.5		30		,6
				201	
			E. C.		
			LI PO		
			401		
		/			
		V			

2. Operating force: An English letter expresses it, unite: Newton (N),as chart 2 shows:

force Code	Operating	Press force(N)	Return force
16	1.6	1.6±0.5	0.4min
26	2.6	2.6±0.5	0.4min

Examples: "TS-1086EV-01216" denotes the ta ct switch with 4.56×2.3 base, the height is 1.2mm,the stem is black, the operating force is 1.6N.

APPROVE BY	王凱 12.05.21	CHECKED BY	李成功 12.05.21	PRPARE BY	許志明 12.05.21
------------	-------------	------------	--------------	-----------	--------------



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		TS-1086EV	TACT SWITCH	

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下)
- -20 $^{\circ}$ C $^{\circ}$ C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30°C ~80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure.....86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃ Temperature.......20℃±2℃


相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Airpressure......86KPa \sim 106Kpa

APPROVE BY 王凱 12.05.21 CHECKED BY 李成功 12.05.21 PRPARE BY 許志明 12.05.21



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		TS-1086EV		

2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)


3. 电气性能:

ELECTRICAL SPECIFICATION

项	目				要求				
ITE	ΞM		TE	EST CONDITIONS		REG	UIREMENTS		
			在以 5V 10mA 的I的电路中,以一个等于	直流电源或不低于1KI 2倍按力的静负荷施					
1	;	接触电阻	Applying a static	load of 2 times ope	erating force to		≤100mΩ		
1	Conta	act Resistance	the center of the stem	, measurements sha	all be made by		<100 lil 32		
			5V DC 10mA or mo	ore than 1KHZ AC	small-current				
			contact resistance met	er.					
2	Ir	绝缘电阻 nsulation desistance	子之间底座、盖板的电	ill be made following across terminals,	g application of		≥100MΩ		
		·质耐压	在端子之间施加 2	250V AC(50HZ 或 60	OHZ)/1min	Э	F击穿、无飞弧		
3	Die	electric	250V AC (50HZ o	r 60HZ) shall be app	olied across		There should be		
	vol	tage proof	terminals, for one	no	breakdown and				
				1	1		flashover		
APPROVE	E BY	王凱 12.05.21	CHECKED BY	李成功 12.05.21	PRPARE	BY	許志明 12.05.21		



C	USTOMER	CUSTOMER'S P/N	GYE'S		PRODUCT		REVISION
	TS-1086EV TACT SWI					СН	
	项目		试验条	件			要求
	ITEM		TEST CONDIT	ΓIONS		RE	QUIREMENTS
	械性能: IANICAL SPEC						
1	按力 Operating Force	开关垂直于操作方向放量开关导通所需的最大 Placing the switch suvertical and then gracenter of the stem, the come to a stop shall b	力度。 ch that the dir dually increas e maximum lo	ection of sw	ritch operation is disapplied to the		fer to chart 3
2	最大行程 Full Travel	开关垂直于操作方向放 开关驱动件顶端中心, Placing the switch su- vertical and then apply the center of the stem to a stop shall be mea		0.25±0.1mm			
APP	ROVE BY	王凱 12.05.21 CHE	CKED BY	李成功 12.0)5.21 PRPA	ARE BY	許志明 12.05.21



	ALLINOVAL SI LOILIOATIONS							
С	USTOMER	CUSTOMER'	S P/N GYE	'S P/N	PF	PRODUCT		REVISION
			TS-	1086EV	TAC	T SWITC	Н	
	项目		试 验 翁	条件			I	要求
	ITEM		TEST CONI	DITIONS			RF	QUIREMENTS
3	回弹力 Return Forc	后,测量顶端向 The sample sw operation is ve to the whole tra	F方向放置,在开关 目自由位置转换的力/ vitch is installed su rtical and upon de avel distance, the fi all be measured.	of switch	re	fer to chart 3		
4	停止强度 Stop Streng	荷持续 1min。 Placing the sw vertical, and th	声方向放置,从操作 itch such that the nen a static load on m operation for a p	eration is	There s	L械和电气损坏 hall be no sign of e mechanically and electrically.		
5	手柄拔出强/ Stem Strength	的行程范围。 Placing the sw vertical, and th	手方向放置,反方向 itch such that the en the maximum fo direction of stem o	eration is		20N.min.		
在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2s±0.5s Immersion time: 2s±0.5s 对于其它步骤参考《GB 5095.6—86》试验12a The other steps please refer to《GB 5095.6-86》TEST 12a						90%以」 Except	for the edge, the should cover a	
APP	ROVE BY	王凱 12.05.21	CHECKED BY	李成功 12	2.05.21	PRPA	RE BY	許志明 12.05.21



	- X3111 3									
CUSTOMER		CUSTOMER	'S P/N	GYE'	S P/N	Р	RODUCT		REVISION	
		TS-1086EV TACT SWITC						CT SWITCH	Н	
	项目				试 验	条件			l	要求
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
	5、极限电气性能: ENVIRONMENTAL SPECIFICATION							1		
1	低温测试 Resistance low tempera		标准湿度的 Following to normal ten measureme (1) 温度 Tem (2) 时间	Temperature : -30±2°C Item 3						
2	高温测试 Heat resista	ance	标准湿度的 forth below humidity co (1) 温度 tem (2) 时间	temperature:80±2℃ 项目 3,4						
3	温度周期性 Change temperat	of	样品应放在 试期间样品 After 5 cycallowed to conditions	居下面的测试要求进行 5 次循环的温度周期性测试,实验后品应放在常温及标准湿度的环境中 1 小时后做性能测试。测用间样品应保持干燥。 er 5 cycles of following conditions, the sample shall be wed to stand under normal temperature and humidity ditions for 1 h. and measurements shall be made. During test water drops shall be removed. Temperature Time -10±2℃ 2(hour) -10~65℃ 1 65±2℃ 2 65~-10℃ 1					Contac ≤200ms 项目 3,4	
APP	APPROVE BY 王凱 12.05.21 0			СНЕ	ECKED BY	李成功	12.05.21	PRPAR	RE BY	許志明 12.05.21



	CUSTOMER	CUSTOMER'S P/N		S P/N		DDUCT		REVISION
	50310WER COSTOWERST/N GTEST/N TRODE		,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		INE VIOIOIN			
			TS-	SWITCH	4			
	项目		试 验	条件			<u> </u>	要求
	ITEM		TEST CON	IDITIONS			RE	QUIREMENTS
4	湿温测试 Moisture resistance	标准湿度的环境 forth below the s humidity conditio (1) 温度: 60 temperatu (2) 相对湿度: relative hu 95% (3) 时间: 96	temperature: 60±2℃ (2) 相对湿度: 90%~95% relative humidity:90% to 95%					
5	硫化试验 Sulfuration resistance	H ₂ S gas c (2) 时间: 72 Time: 72h (3) 温度: 40:	中 1 小时后做性 ample shall be ns for 1 h befor 浓度:3ppm±1 oncentration: h	e test set ture and ade:	Contact ≤200mΩ 项目 3,4			
6	盐雾试验 Salt Mist	The switch sha (1)温度:35℃ temperatu (2)盐溶液浓度 salt solutio (3)时间:8h± Time:8h±1 实验后的盐沉积物	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution: 5±1%(solids by mass) (3) 时间: 8h±1h Time: 8h±1 hour 实验后的盐沉积物后水冲掉 After test, salt deposit shall be removed by running water.					上没有腐蚀斑点 No remarkable on shall be zed in metal part.
APP	PROVE BY	王凱 12.05.21 CI	HECKED BY	李成功 12	.05.21	PRPAR	E BY	許志明 12.05.21



		1							
CUSTOMER			CUSTOMER'S F					REVISION	
_ !==:	am to the sec			TS-1	1086EV	TAC	CT SWITCH		
	6、极限机械性能: ENDURANCE SPECIFICATION								
<u>E</u>	MDURANCE 项目	SPEC	TEATION	试 验	久 化			要求	
	ITEM		担担工金品加	TEST CON 式要求进行测试:	IDITIONS			REQUIREMENTS	
1	工作寿命 Operation		Measurement (1) DC 12V DC 12V (2) 按动速 Rate of (3) 按力: Operating (4) 平均无	shall be made fol 7, 50mA 带负载 7, 50 mA resistive 率: 1 次/秒 f operation: 1time 按力的 1.5 倍 g Force: Oper 故障寿命: Avera 1.6 2.5	load es/s ating Force1	.5double life	接触 res 触 C 力 Op init	触电阻≤200mΩContact sistance≤200mΩ 点弹力≤10ms ontact bounce≤10ms按 : 初 值 的 ±30% erating Force: ial value±30% 目 3,4.1,4.2,4.3 m 3,4.1,4.2,4.3	
2 7 . 煜	振动Vibra 接 条件:	tion	(1) 振动频 Vibrat (2) 振幅 Amplit 级 振动方 Direct directi	条件进行测试: shall be made fol 顷率范围: 10~55 tion frequency rar (峰一峰): 1.5mm tude: 1.5mm fol: 包括手柄行和 cion of vibration:This ion including the cion: 每次 2hours ion: Each 2hours	z _{互垂直的方} Itel ndicular	目 3,4.1,4.2,4.3 m 3,4.1,4.2,4.3			
		DITIO	NS:						
7.1	ILDERING CONDITIONS:						ons:		
APP	ROVE BY	王剴					PRPARE I	BY 許志明 12.05.21	



CUSTOMER		CUSTOMER'S P/N	GYE'S P/N		PRODUCT	REVISION
	TS-			S-1086EV	TACT SWITCH	
	自动浸焊	项目 Items			条件 Condition	
	Conditions for	. 助焊剂附着量		不附着于零部	7件贴装面的程度	
	Auto-dip	Flux built-up		Mounting sur	face should not be coate	ed with flax
	/ tato dip			印刷电路板焊接面的周围温度 100℃ max.		
		Preheating tempera	ature	Ambient temperature of the soldered surface of PC board. 100℃ max.		
7.2		预热温度时间 Preheating tim	e		60s max.	
		焊接温度 Soldering temp			260°C max.	
		焊接浸渍时间 Continuous dipping			5s max.	
		焊接次数			2次以下	
	Number of soldering		2times max.			
	焊接说明:					

焊接说明:

1、开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.

1.1 在使用烙铁的情况下,焊锡温度应在350℃以下、3 秒以内。

In the case of using solding iron, solding conditions shall be 350℃ max and 3 sec.max.

1.2 浸焊后,注意不要在顶部施加负荷。

Right after switches were soidered; please be careful not to load to on the knobs of switches.

- 2、设计中应注意的事项(Design instructions)
- 2.1 印刷基板的安装孔尺寸参见产品图。

Follow recommended P.W.B. piercing plan in outside drawing page.

- 3、注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关。

Please be cautions not to give excessive static load or shock to swiches.

3.2 开关浸焊后,印刷基板注意不要叠放。

Please be careful not to pile up P.W.B.after switches were soldered.

3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要 打开包装箱。

Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially. When you need to preserve for a long period, do not open the carton.

APPROVE BY	王凱 12.05.21	CHECKED BY	李成功 12.05.21	PRPARE BY	許志明 12.05.21
------------	-------------	------------	--------------	-----------	--------------