


### ■ Features

- Low saturation voltage.  $V_{CE(sat)} = -0.35V$ (Max.) at  $I_C / I_B = -1A / -50mA$ .
- Excellent DC current gain characteristics.
- Complements the 2SA1797 and 2SC4672.

**SOT-89**

1. BASE
2. COLLECTOR
3. EMITTER

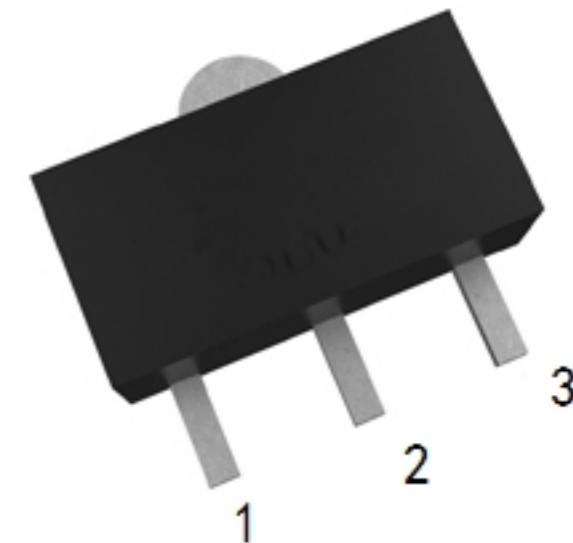

### ■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector-emitter Voltage	$V_{CEO}$	-50	V
Collector-base Voltage	$V_{CBO}$	-50	V
Emitter-base Voltage	$V_{EBO}$	-6	V
Collector current	$I_C$	-1.5	A
Collector power dissipation	$P_C$	0.5	W
Junction temperature	$T_J$	150	$^\circ C$
Storage temperature	$T_{stg}$	-55 to +150	$^\circ C$

### ■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Collector-emitter breakdown voltage	$BV_{CEO}$	$I_C = -1mA$	-50			V
Collector-base breakdown voltage	$BV_{CBO}$	$I_C = -50 \mu A$	-50			V
Emitter-base breakdown voltage	$BV_{EBO}$	$I_E = -50 \mu A$	-6			V
Collector cutoff current	$I_{CBO}$	$V_{CB} = -50V$			-0.1	$\mu A$
Emitter cutoff current	$I_{EBO}$	$V_{EB} = -5V$			-0.1	$\mu A$
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -1A, I_B = -50mA$	-0.15	-0.35		V
DC current transfer ratio	$h_{FE}$	$V_{CE} = -2V, I_C = -0.5A$	82	390		
Transition frequency	$f_T$	$V_{CE} = -2V, I_E = 0.5A, f = 100MHz$		200		MHz
Output Capacitance	$C_{ob}$	$V_{CB} = -10V, I_E = 0A, f = 1MHz$		36		pF

### ■ hFE Classification

Marking	AG		
	P	Q	R
hFE	82~180	120~270	180~390