

# Unipolar Hall Effect Switches

## **Description**

The SC113X Hall-Effect switch series is monolithic integrated circuits with tighter magnetic specifications, designed to operate continuously over extended temperatures to +150°C, and are more stable with both temperature and supply voltage changes. The negative compensation slope is optimized to match the negative temperature coefficient of low cost magnets.

Each device includes a voltage regulator for operation with supply voltages of 3.8 to 40V volts, quadratic Hall-voltage generator, temperature compensation circuitry, small-signal amplifier, Schmitt trigger, and an open-collector output to sink up to 40mA.

## **Features and Benefits**

- 3.8 to 40V supply voltage
- High transient voltage protection
- 40mA sinking capability
- High ESD rating
- 3-pin SIP, 3-pin SOT-89 and SOT-23 packages are available
- RoHs compliant

# **Potential Applications**

- Brushless DC motor
- Position sensor
- Motor and fan control
- Auto-motive transmission position




# **Device Information**

Part Number	Packing	Mounting	Ambient, T <sub>A</sub>	B <sub>OP</sub> (Typ.)	B <sub>RP</sub> (Typ.)	
SC1133UA	Bulk, 1000 pieces/bag	SIP3	40% 1. 450%	+8.0mT	+5.5mT	
SC1133SO-N	Reel, 3000pieces/reel	SOT-23	-40°C to 150°C	-8.0mT	-5.5mT	
SC1134UA	Bulk, 1000 pieces/bag	SIP3		40.0 × T		
SC1134BU	Reel, 1000pieces/reel	SOT-89	-40°C to 150°C	+12.0mT	+9.5mT	
SC1134SO-N	Reel, 3000pieces/reel	SOT-23		-12.0mT	-9.5mT	
SC1138UA	Bulk, 1000 pieces/bag	SIP3	1000 1 15000	+25.0mT	+20.0mT	
SC1138SO-N	Reel, 3000pieces/reel	SOT-23	-40℃ to 150℃	-25.0mT	-20.0mT	




# **Block Diagram**

The circuit includes Hall generator, amplifier and Schmitt-Trigger on one chip. The internal reference provides the supply voltage for the components. A magnetic field perpendicular to the chip surface induces a voltage at the Hall probe. This voltage is amplified and switches as a Schmitt-Trigger with open-collector output. A protection diode against reverse power supply is integrated.

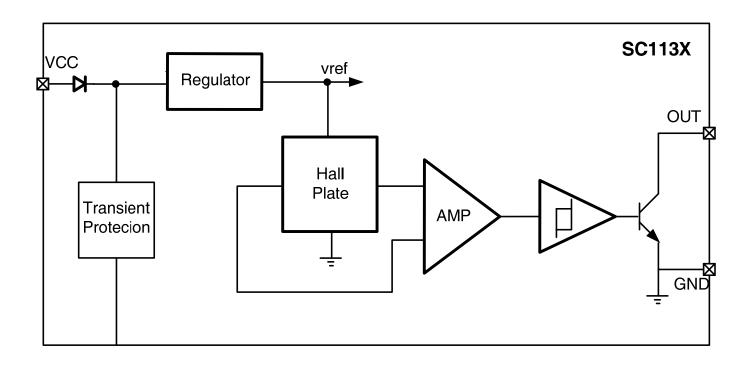



# **Pin Description**

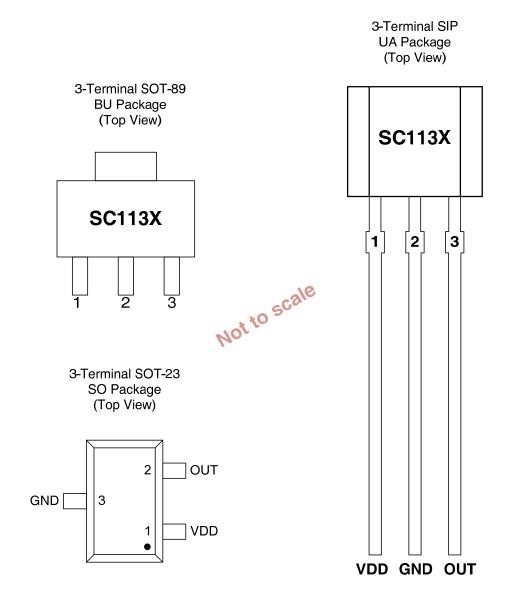

Terminal				
Nama	Number		Type	Description
Name	UA/BU	SO		
VDD	1	1	PWR	3.8 to 40 V power supply
GND	2	3	Ground	Ground terminal
OUT	3	2	Output	Open-drain output



# **Absolute Maximum Ratings**

over operating free-air temperature range (unless otherwise noted) (1)

Parameter	Symbol	Min.	Max.	Units
Power supply voltage	Vcc	<b>-40</b> <sup>(2)</sup>	60	V
Output terminal voltage	Vout	-0.5	60	٧
Output terminal current sink	Isink	0	50	mA
Operating ambient temperature	T <sub>A</sub>	-40	150	${\mathbb C}$
Maximum junction temperature	TJ	-55	165	$^{\circ}$
Storage temperature	Тѕтс	-65	175	$^{\circ}$ C

<sup>(1)</sup>Stresses above those listed here may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

#### **Electrical Characteristics**

over operating free-air temperature range (Vcc =5V, unless otherwise noted)

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units
Vcc	Operating voltage <sup>(1)</sup>	TJ < TJ (Max.)	3.8		40	V
Vccr	Reverse supply voltage	T <sub>A</sub> =25℃	-40	1		V
Icc	Operating supply current	Vcc=3.8 to 40 V		4.0	10	mA
I <sub>QL</sub>	Off-state leakage current	Output Hi-Z			3	uA
VSAT	Output saturation voltage	I <sub>Q</sub> =20mA, T <sub>A</sub> =25℃			300	mV
tr	Output rise time	R1=1Kohm Co=20pF			1.5	uS
tf	Output fall time	R1=1Kohm Co=20pF			1.5	uS

<sup>(1)</sup> Maximum voltage must be adjusted for power dissipation and junction temperature, see Thermal Characteristics

<sup>(2)</sup> Ensured by design.

<sup>(2) 1</sup>mT=10Gs



# **Magnetic Characteristics**


over operating free-air temperature range (unless otherwise noted)

Symbol	Parameter	Test Conditions	Min.	Тур.	Max.	Units		
f <sub>BW</sub>	Bandwidth				100	kHz		
SC1133	+8.0 / +5.5 mT							
Bop	Operated point	T <sub>A</sub> =25℃	5.5	8.0	11.5	mT		
B <sub>RP</sub>	Release point		1.5	5.5	10.0	mT		
Внуѕ	Hysteresis			2.5		mT		
SC1134	+12.0 / +9.5 mT							
Вор	Operated point	T <sub>A</sub> =25℃	9.5	12.0	16.5	mT		
B <sub>RP</sub>	Release point		5.5	9.5	14.0	mT		
B <sub>HYS</sub>	Hysteresis			2.5		mT		
SC1138 +25.0 / +20.0 mT								
Вор	Operated point	T <sub>A</sub> =25℃	20.5	25.0	29.5	mT		
B <sub>RP</sub>	Release point		14.5	20.0	25.5	mT		
Внуѕ	Hysteresis			5.0		mT		




### **Field Direction Definition**

A positive magnetic field is defined as a South pole near the marked side of the package.

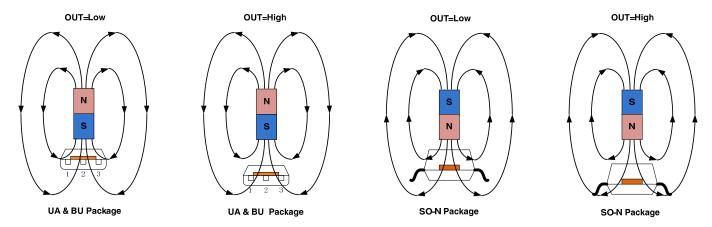


#### **Transfer Function**

Powering-on the device in the hysteresis region, less than  $B_{OP}$  and higher than  $B_{RP}$ , allows an indeterminate output state. The correct state is attained after the first excursion beyond  $B_{OP}$  or  $B_{RP}$ . If the field strength is greater than  $B_{OP}$ , then the output is pulled low. If the field strength is less than  $B_{RP}$ , the output is released.

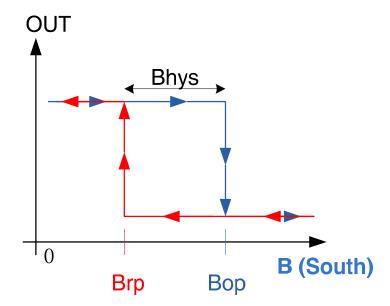



## **Typical Application**

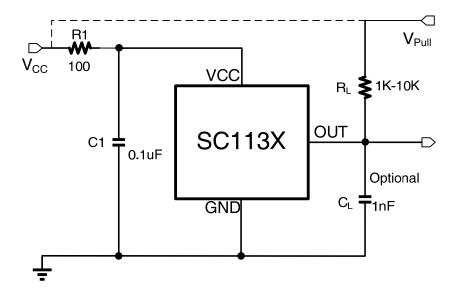

The SC113X contains an on-chip voltage regulator and can operate over a wide supply voltage range. In applications that operate the device from an unregulated power supply, transient protection must be added externally. For applications using a regulated line, EMI/RFI protection may still be required. R1 is for improved CI performance, and could be 100 or 200  $\Omega$  typically.

The SC113X device output stage uses an open-drain NPN transistor, and it is rated to sink up to 40mA of current. For proper operation, calculate the value of the pull-up resistor  $R_L$  is required. The size of  $R_L$  is a tradeoff between OUT rise time and the load capacity when OUT is pulled low. A lower current is generally better, however faster transitions and bandwidth require a smaller resistor for faster switching.

Select a vaule for C<sub>L</sub> based on the system bandwidth specifications as:

$$2 \times f(Hz) = \frac{1}{2\pi \times R \times C}$$

Most applications do not require this C<sub>L</sub> filtering capacitor.

 $V_{\text{PULL}}$  is not restricted to  $V_{\text{CC}}$ , and could be connected to other voltage reference. The allowable voltage range of this terminal is specified in the Absolute Maximum Ratings.



## **Mechanical Dimensions**

3-Terminal **UA Package** Dimension:mm 4.10 4.0 3.90 1.62 1.5 1.42 3.0 2.60 ▶ 2.0 2.30 2.90 1.80 0.38 0.56 16.2 0.35 15.5 1.30 1.24 2.57 2.50 0.51

#### Notes:

1. Exact body and lead configuration at vendor's option within limits shown.

0.36

2. Height does not include mold gate flash.


Where no tolerance is specified, dimension is nominal.



# **Mechanical Dimensions**

### 3-Terminal **BU Package**

Dimention: mm

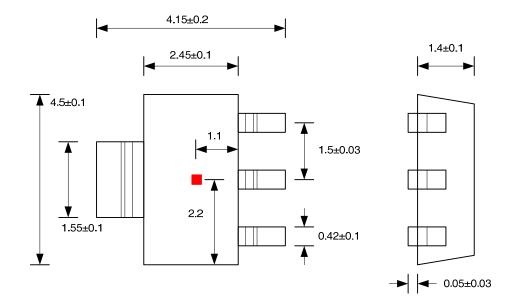

#### Notes:

- Exact body and lead configuration at vendor's option within limits shown. Height does not include mold gate flash.


Where no tolerance is specified, dimension is nominal.





## **Mechanical Dimensions**


# 3-Terminal SO Package

#### Dimension:mm

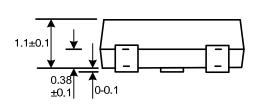



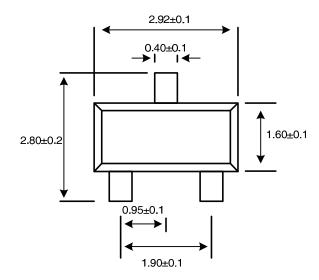



#### Notes:

- 1. Exact body and lead configuration at vendor's option within limits shown.
- 2. Height does not include mold gate flash.

Where no tolerance is specified, dimension is nominal.