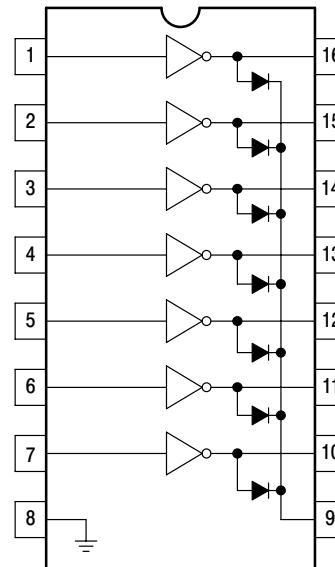
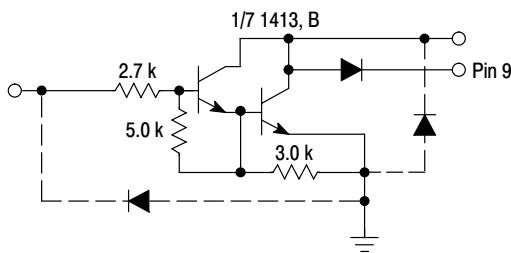


The seven NPN Darlington connected transistors in these arrays are well suited for driving lamps, relays, or printer hammers in a variety of industrial and consumer applications. Their high breakdown voltage and internal suppression diodes insure freedom from problems associated with inductive loads. Peak inrush currents to 500 mA permit them to drive incandescent lamps.

The 1413, B with a 2.7 k Ω series input resistor is well suited for systems utilizing a 5.0 V TTL or CMOS Logic.

Features

- Pb-Free Packages are Available*
- NCV Prefix for Automotive and Other Applications Requiring Site and Control Changes



(Top View)

1413

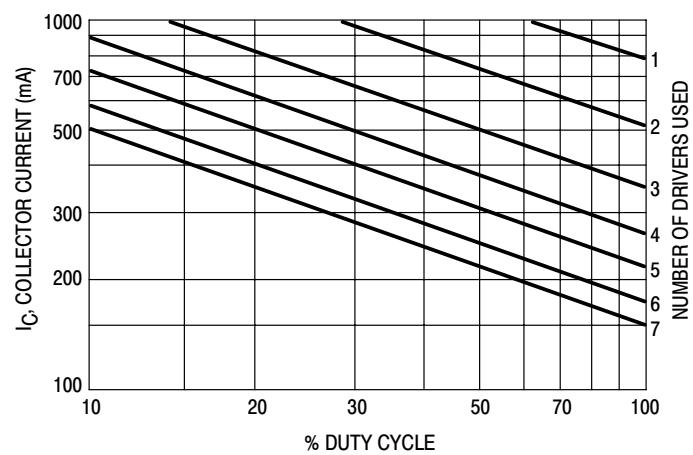
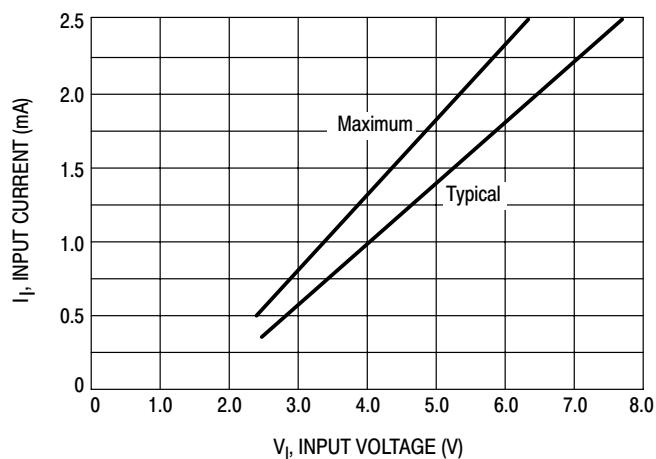
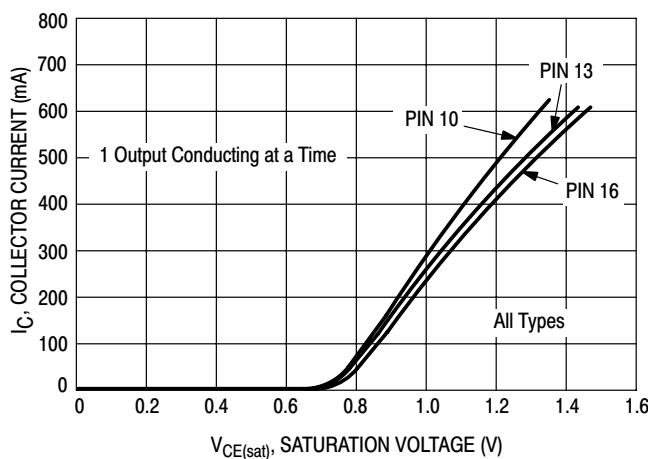
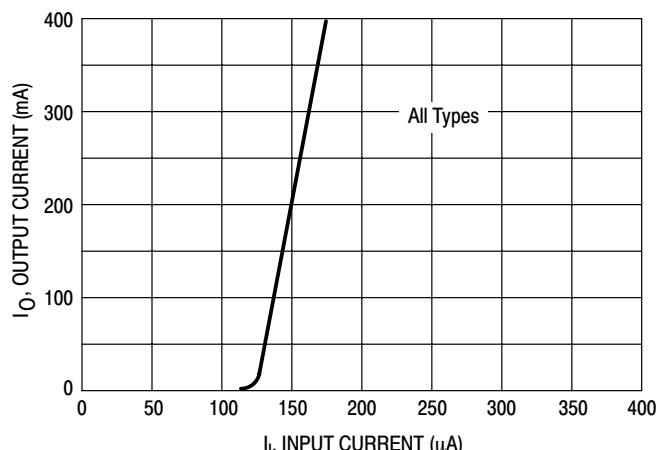
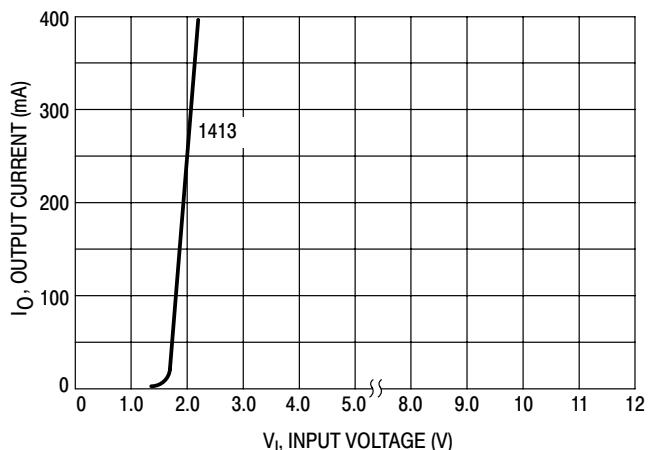
MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$, and rating apply to any one device in the package, unless otherwise noted.)

Rating	Symbol	Value	Unit
Output Voltage	V_O	50	V
Input Voltage	V_I	30	V
Collector Current – Continuous	I_C	500	mA
Base Current – Continuous	I_B	25	mA
Operating Ambient Temperature Range 1413	T_A	-20 to +85 -40 to +85 -40 to +125	°C
Storage Temperature Range	T_{stg}	-55 to +150	°C
Junction Temperature	T_J	150	°C
Thermal Resistance, Junction-to-Ambient Case 648, P Suffix Case 751B, D Suffix	$R_{\theta JA}$	67 100	°C/W
Thermal Resistance, Junction-to-Case Case 648, P Suffix Case 751B, D Suffix	$R_{\theta JC}$	22 20	°C/W
Electrostatic Discharge Sensitivity (ESD) Human Body Model (HBM) Machine Model (MM) Charged Device Model (CDM)	ESD	2000 400 1500	V

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$, unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
Output Leakage Current ($V_O = 50 \text{ V}$, $T_A = +85^\circ\text{C}$) ($V_O = 50 \text{ V}$, $T_A = +25^\circ\text{C}$)	I_{CEX}	—	—	100	μA
All Types		—	—	50	
Collector-Emitter Saturation Voltage ($I_C = 350 \text{ mA}$, $I_B = 500 \mu\text{A}$) ($I_C = 200 \text{ mA}$, $I_B = 350 \mu\text{A}$) ($I_C = 100 \text{ mA}$, $I_B = 250 \mu\text{A}$)	$V_{CE(\text{sat})}$	—	1.1	1.6	V
All Types		—	0.95	1.3	
All Types		—	0.85	1.1	
Input Current – On Condition ($V_I = 3.85 \text{ V}$)	$I_{I(\text{on})}$	—	0.93	1.35	mA
Input Voltage – On Condition ($V_{CE} = 2.0 \text{ V}$, $I_C = 200 \text{ mA}$) ($V_{CE} = 2.0 \text{ V}$, $I_C = 250 \text{ mA}$) ($V_{CE} = 2.0 \text{ V}$, $I_C = 300 \text{ mA}$)	$V_{I(\text{on})}$	—	—	2.4	V
MC1413, B		—	—	2.7	
MC1413, B		—	—	3.0	
Input Current – Off Condition ($I_C = 500 \mu\text{A}$, $T_A = 85^\circ\text{C}$)	All Types	$I_{I(\text{off})}$	50	100	—
DC Current Gain ($V_{CE} = 2.0 \text{ V}$, $I_C = 350 \text{ mA}$)	h_{FE}	1000	—	—	—
Input Capacitance	C_I	—	15	30	pF
Turn-On Delay Time (50% E_I to 50% E_O)	t_{on}	—	0.25	1.0	μs
Turn-Off Delay Time (50% E_I to 50% E_O)	t_{off}	—	0.25	1.0	μs
Clamp Diode Leakage Current ($V_R = 50 \text{ V}$)	I_R	—	—	50	μA
$T_A = +25^\circ\text{C}$		—	—	100	
Clamp Diode Forward Voltage ($I_F = 350 \text{ mA}$)	V_F	—	1.5	2.0	V

NOTE: 1413 $T_{\text{low}} = -40^\circ\text{C}$, $T_{\text{high}} = +125^\circ\text{C}$. Guaranteed by design. NCV prefix is for automotive and other applications requiring site and change control.

TYPICAL PERFORMANCE CURVES - $T_A = 25^\circ\text{C}$ 

以上信息仅供参考. 如需帮助联系客服人员。谢谢 XINLUDA