



WS4621C

2A, 38 mΩ, 290nA Quiescent current and 70nA Standby current Load Switch

[Http://www.sh-willsemi.com](http://www.sh-willsemi.com)

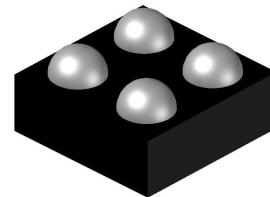


CSP-4L

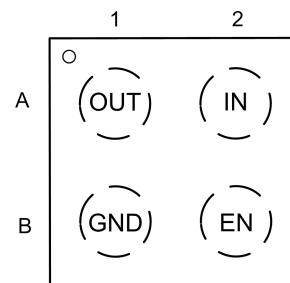

Pin Configuration (Top View)

Features

- Input Voltage Range : 1.2V~5.5V
- Main switch Ron : 38mΩ @ 4.2V
- Maximum Output current : 2A.
- Quiescent current : 290nA @ Typ
- Standby current : 70nA @ Typ
- Recommend capacitor : 1μF
- Active High EN Pin
- CSP-4L 1 x 1 mm

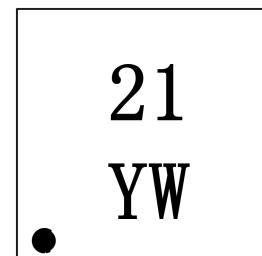

CSP-4L

21 : Device Code

Y : Year code

W : Week code

Applications


- MP3/MP4 Players
- Cellphones, radiophone, digital cameras
- Bluetooth, wireless handsets
- Others portable electronics device

Marking

Order information

Device	Marking	Package	Shipping
WS4621C-4/TR	21YW	CSP-4L	3000/Reel&Tape


Typical Application

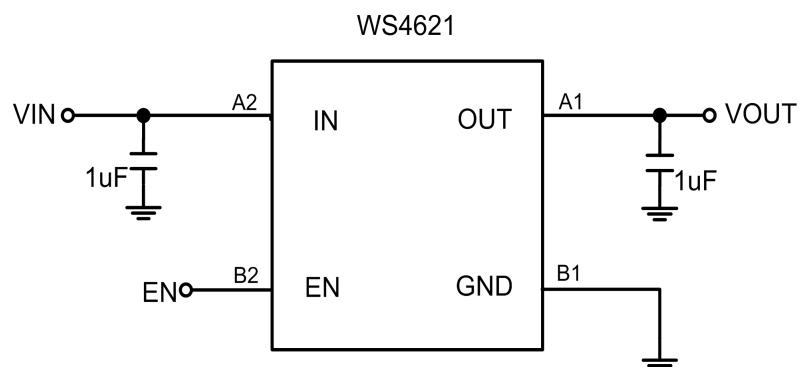

Pin Description

PIN	Symbol	Description
A1	OUT	Output pin
A2	IN	Input pin
B1	GND	Ground
B2	EN	Enable (Active high)

Block Diagram

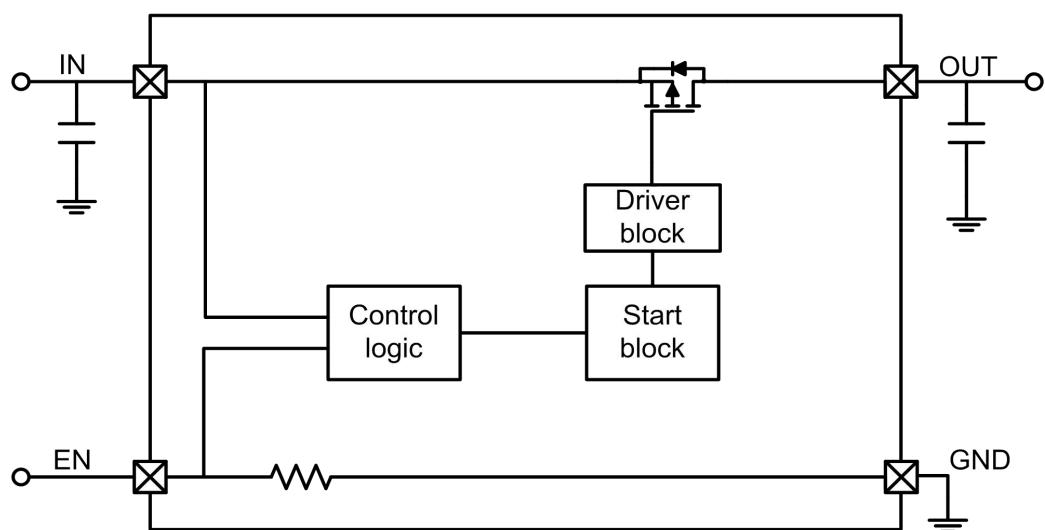

Absolute Maximum Ratings

Parameter	Value	Unit
V _{IN} Range	-0.3~6.5	V
V _{EN} Range	-0.3~6.5	V
V _{OUT} Range	-0.3~6.5	V
Storage Temperature Range	-40 ~ 150	°C
Junction Temperature Range	-40 ~ 125	°C
Lead Temperature	260	°C
Moisture Sensitivity	Level-1	
ESD Ratings	HBM	8000
	MM	400


Recommend Operating Ratings

Parameter	Value	Unit
Operating Power voltage	1.2~5.5	V
Enable Voltage	0~5.5	V
Maximum DC current	2	A
Operating ambient temperature	-40~85	°C
Operating Junction temperature	-40~125	°C
Decoupling input capacitor	1	uF
Decoupling output capacitor	1	uF
Power Dissipation Rating(25 °C,WLCSP package)	0.5	W
Power Dissipation Rating(85 °C,WLCSP package)	0.2	W
Thermal Resistance, R _{θJA} (CSP-4L)	100	°C/W

Electronics Characteristics







($T_a=25^\circ\text{C}$, $V_{IN}=5\text{V}$, $C_{IN}=C_{OUT}=1\ \mu\text{F}$, unless otherwise noted)


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Input Voltage	V_{IN}		1.2		5.5	V
Static drain-source on-state resistance	R_{DSON}	$V_{IN}=5.5, I_{OUT}=200\text{mA}$	8	34	42	$\text{m}\Omega$
		$V_{IN}=4.2, I_{OUT}=200\text{mA}$	9	38	47	
		$V_{IN}=3.3, I_{OUT}=200\text{mA}$	10	42	52	
		$V_{IN}=1.8, I_{OUT}=200\text{mA}$	12	62	88	
		$V_{IN}=1.2, I_{OUT}=200\text{mA}$	12	104	250	
EN logic high voltage	V_{ENH}		0.9			V
EN logic low voltage	V_{ENL}				0.5	V
EN pull down resistor	R_{PD}			4		$\text{M}\Omega$
Standby current	I_{STD}	EN=Low, No load		70	200	nA
Quiescent current	I_Q	EN=High, No load		290	500	nA
Enable time	T_{EN}	$RL=25\text{ohm}$		35		μs
Output rise time	T_R	$RL=25\text{ohm}$		25		μs
ON time($T_{EN}+T_R$)	T_{ON}	$RL=25\text{ohm}$		60		μs
Output fall time	T_F	$RL=25\text{ohm}$		58		μs

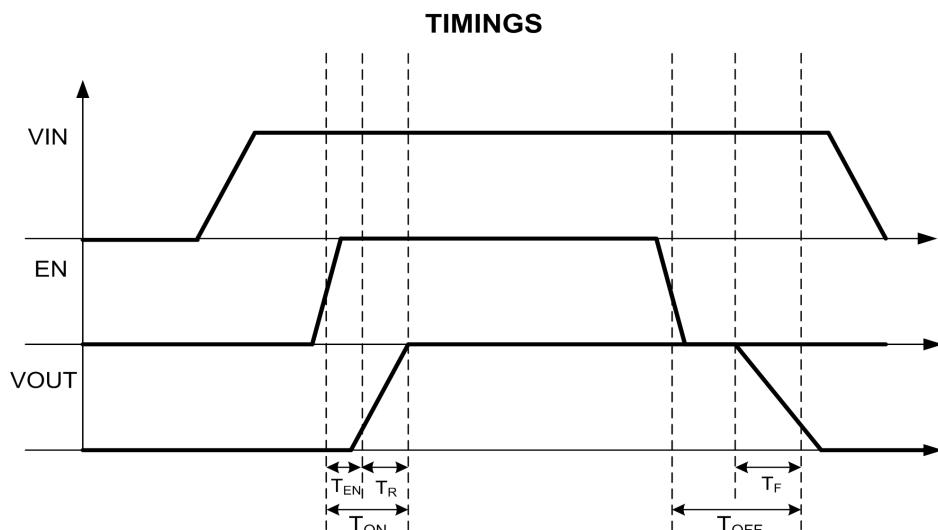

Enable, rise and fall time


Typical characteristics (Ta=25°C, V_{IN}=5V, I_{OUT}=200mA, C_{IN}=C_{OUT}=1 μF, unless otherwise noted)

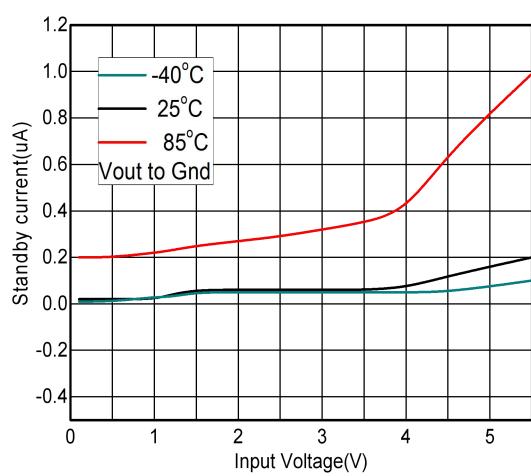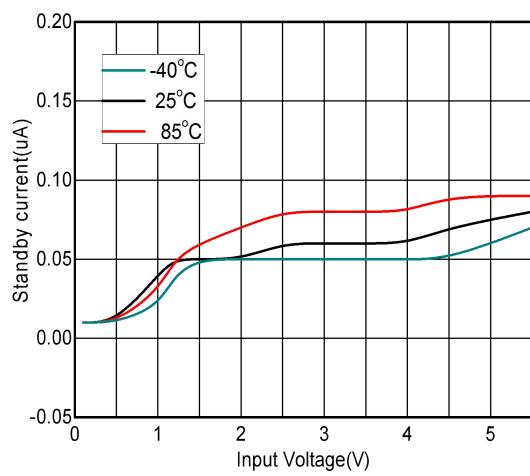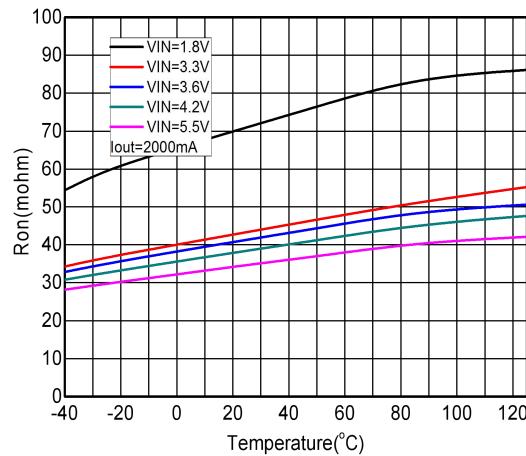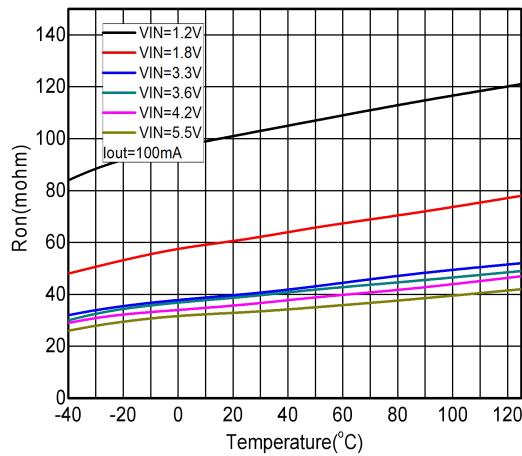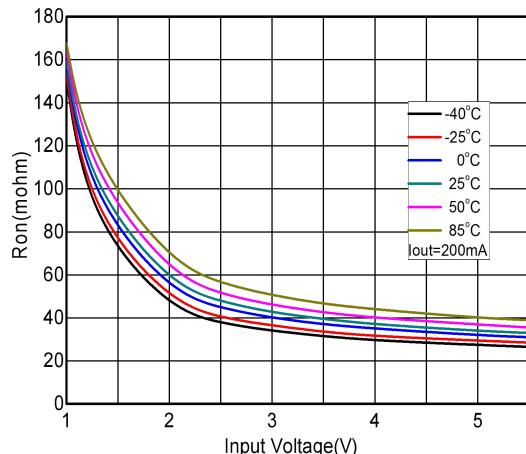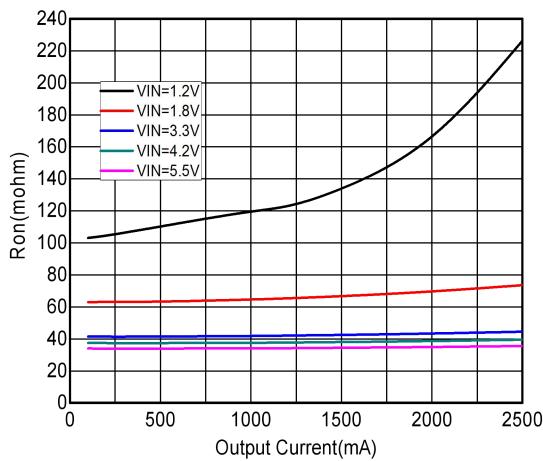

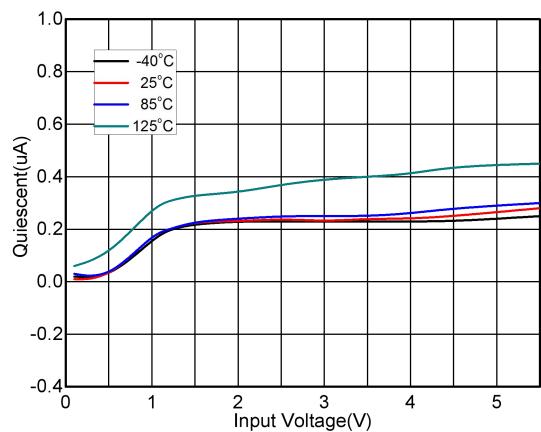


Turn on transient


$C_{in}=C_{out}=1\mu F$, $I_{out}=200mA$, $V_{IN}=1.2V$

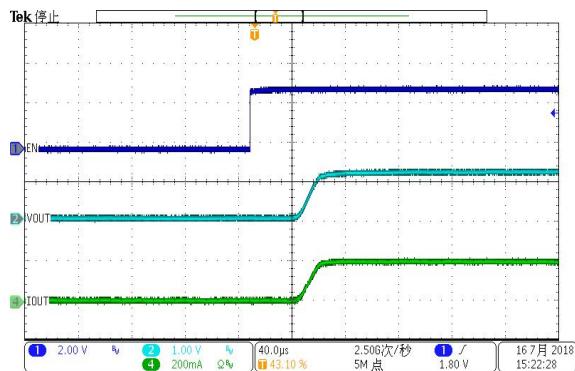


$C_{in}=C_{out}=10\mu F$, $I_{out}=200mA$, $V_{IN}=1.2V$

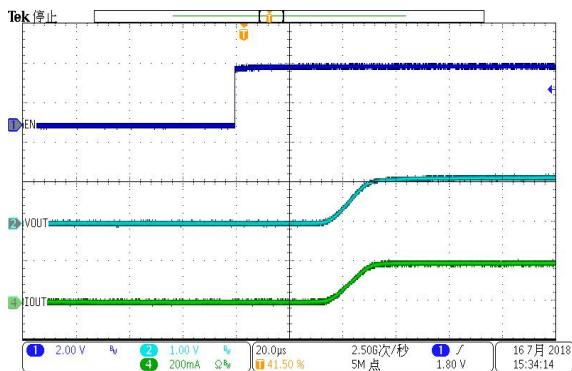


$C_{in}=C_{out}=1\mu F$, $I_{out}=200mA$, $V_{IN}=3.6V$

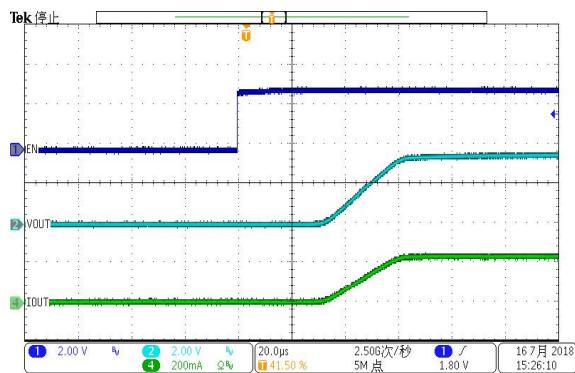


$C_{in}=C_{out}=10\mu F$, $I_{out}=200mA$, $V_{IN}=3.6V$



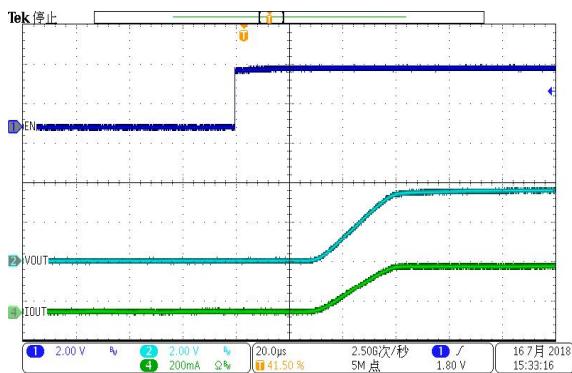


$C_{in}=C_{out}=1\mu F$, $I_{out}=200mA$, $V_{IN}=5.5V$

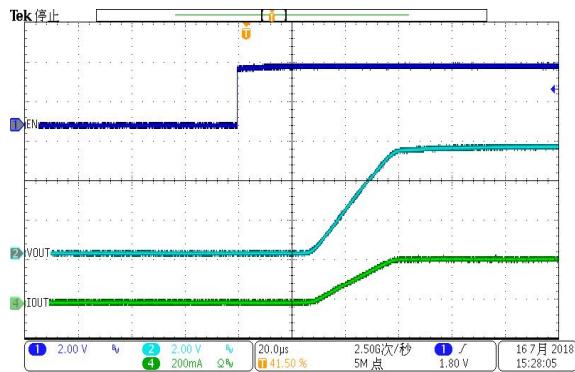

$C_{in}=C_{out}=10\mu F$, $I_{out}=200mA$, $V_{IN}=5.5V$

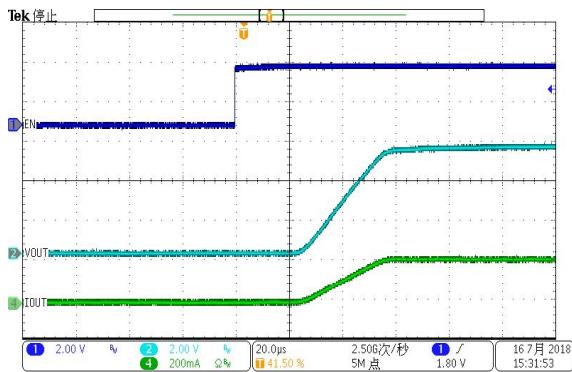


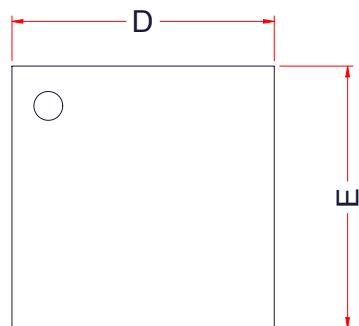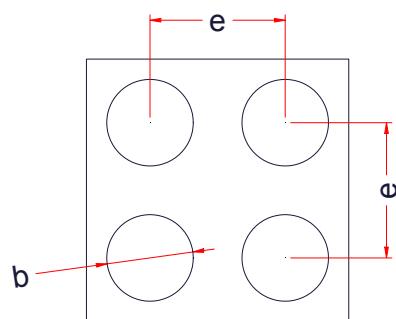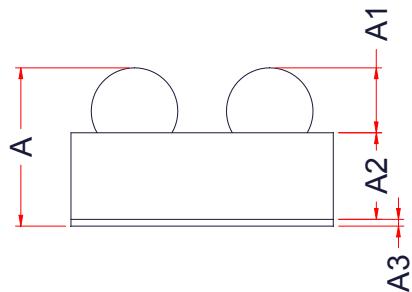PACKAGE OUTLINE DIMENSIONS
CSP-4L

TOP VIEW

BOTTOM VIEW

SIDE VIEW

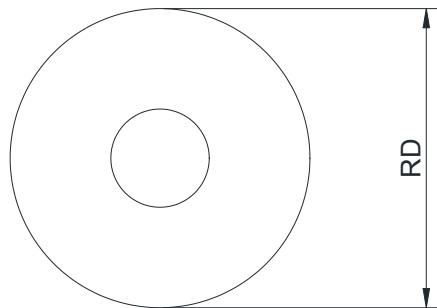
Symbol	Dimensions in Millimeters		
	Min.	Typ.	Max.
A	0.55	0.58	0.62
A1	0.22	0.24	0.26
A2	0.30	0.32	0.34
A3	0.02		0.03
D	0.94	0.97	1.00
E	0.94	0.97	1.00
e	0.50BSC		
b	0.30	0.32	0.34

TAPE AND REEL INFORMATION


Reel Dimensions



Tape Dimensions

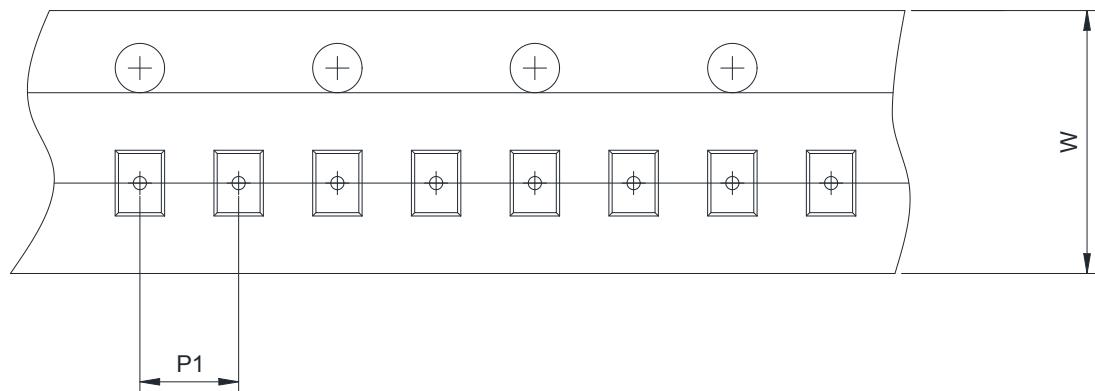

Quadrant Assignments For PIN1 Orientation In Tape

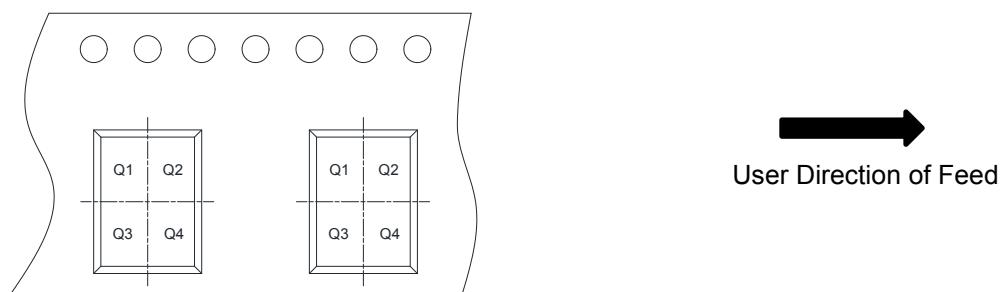

RD	Reel Dimension	<input checked="" type="checkbox"/> 7inch <input type="checkbox"/> 13inch
W	Overall width of the carrier tape	<input checked="" type="checkbox"/> 8mm <input type="checkbox"/> 12mm <input type="checkbox"/> 16mm
P1	Pitch between successive cavity centers	<input type="checkbox"/> 2mm <input checked="" type="checkbox"/> 4mm <input type="checkbox"/> 8mm
Pin1	Pin1 Quadrant	<input checked="" type="checkbox"/> Q1 <input type="checkbox"/> Q2 <input type="checkbox"/> Q3 <input type="checkbox"/> Q4