

# APPROVAL SHEET

Approval Specification	Customer's Approval Certificate
TO:	Checked & Approved by:
Part No.:	Date:
Customer's Part No.:	Please return this copy as a certification of your approval

## Shenzhen Huayuan Micro Electronic Technology Co.Ltd.

Tel: +86-0755-29881155-8006

Fax: +86-0755-29881157

E-mail: [sfsaw\\_sales@163.com](mailto:sfsaw_sales@163.com)

QQ: 3037058772

Website: <http://www.sfsaw.com> <http://www.szhywd.net>


Add: No.5 Zhuangcun Road, Xiner Community,  
Shajing Street, Baoan District, Shenzhen



Part No.	:	SFR304D
Pages	:	5
Date	:	2016/8/1
Revision	:	2.0


**Features**

- 1-port Resonator
- Ceramic Package for **Surface Mounted Technology (SMT)**
- **RoHS** compatible
- Package size 5.00x5.00x1.50mm<sup>3</sup>
- Package Code QCC8C
- **Electrostatic Sensitive Device(ESD)**

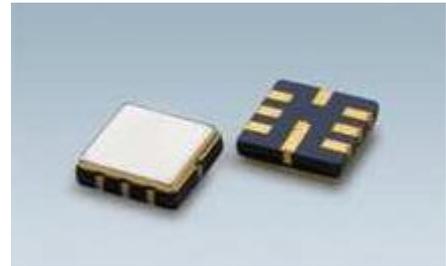


**Application**



Typical Low-Power Transmitter Application

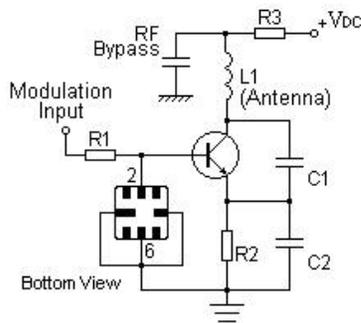

Typical Local Oscillator Application

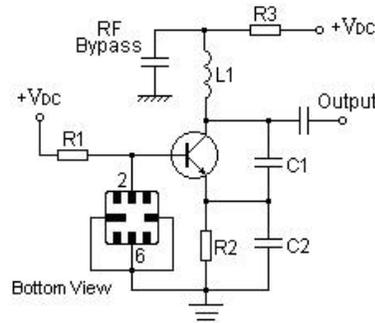


**Package Dimensions (QCC8C)**

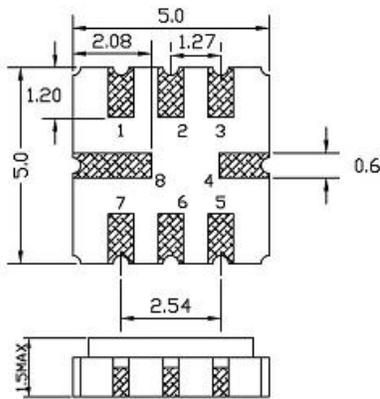

**Pin Configuration**


<b>2</b>	Input/ Output
<b>6</b>	Output/ Input
<b>1,3,5,7</b>	To be Grounded
<b>4,8</b>	Case Ground

## Marking

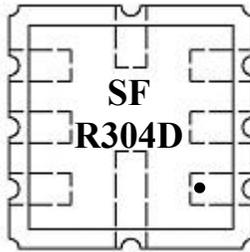


<b>SF</b>	Trademark
<b>R</b>	SAW Resonator
<b>304D</b>	Part number
●	Pin 1

## Test Circuit

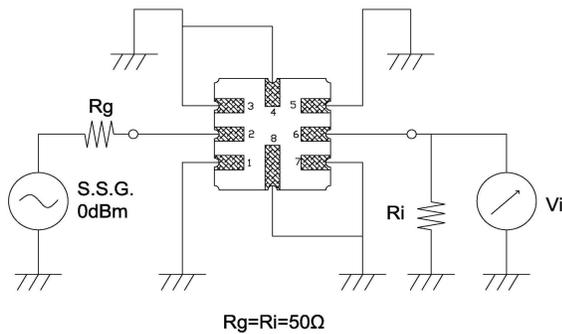

## Equivalent LC Model

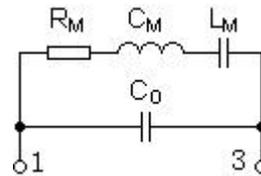

## Performance

### Maximum Rating

Item		Value	Unit
DC Voltage	$V_{DC}$	$\pm 30$	V
Operation Temperature	T	-40 ~ +85	°C
Storage Temperature	$T_{stg}$	-40 ~ +85	°C
RF Power Dissipation	P	25	dBm

### Electronic Characteristics

Test Temperature:  $25^\circ\text{C} \pm 2^\circ\text{C}$


Terminating source impedance:  $50\Omega$

Terminating load impedance:  $50\Omega$

Item		Minimum	Typical	Maximum	Unit
Center Frequency	Absolute Frequency	$f_c$	304.30		MHz
	Tolerance from 304.30MHz	$\Delta f_c$	$\pm 75$		KHz
Insertion Loss(min)		IL	1.1	2.0	dB
Quality Factor	Unloaded Q	$Q_U$	17496		
	$50\Omega$ Loaded Q	$Q_L$	1789		
Frequency Aging	Absolute Value during the First Year	$ f_A $	$\leq 10$		ppm/yr

DC Insulation Resistance between Any Two Pins			1.0			MΩ
RF Equivalent RLC Model	Motional Resistance	$R_M$		11.3	15.0	Ω
	Motional Inductance	$L_M$		104.3		μH
	Motional Capacitance	$C_M$		2.74		fF
	Static Capacitance	$C_0$	3.62	3.92	4.22	pF

## Frequency Response

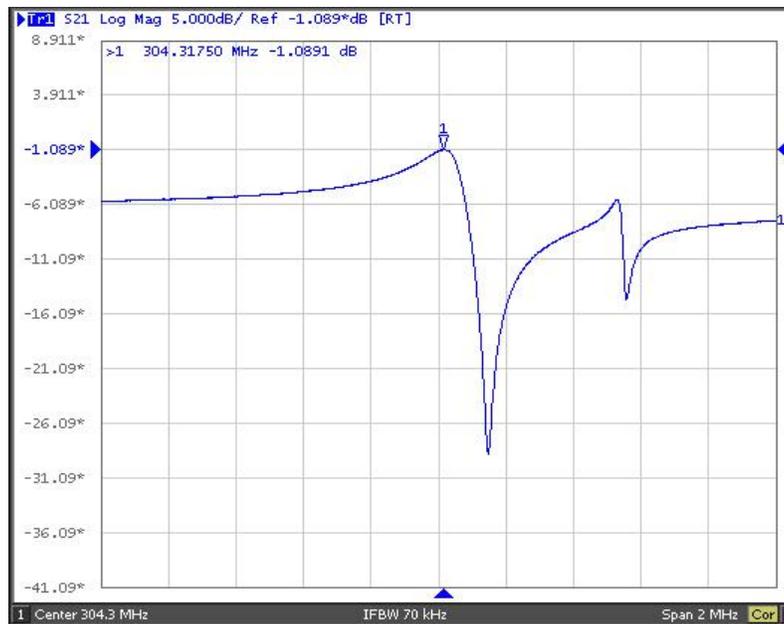


## Reliability (The SAW components shall remain electrical performance after tests)

No.	Test item	Test condition	
1	Temperature Storage	(1) Temperature: 85°C±2°C , Duration: 250h , Recovery time: 2h±0.5h (2) Temperature: -40°C±3°C , Duration: 250h , Recovery time: 2h±0.5h	
2	Humidity Test	Conditions: 60°C±2°C , 90~95% RH	Duration: 250h
3	Thermal Shock	Heat cycle conditions: TA=-40°C±3°C, TB=85°C±2°C, t1=t2=30min, Switch time: ≤3min , Cycle time: 100 times , Recovery time : 2h±0.5h.	
4	Vibration Fatigue	Frequency of vibration: 10~55Hz Directions: X,Y and Z	Amplitude:1.5mm Duration: 2h
5	Drop Test	Cycle time: 10 times	Height: 1.0m
6	Solder Ability Test	Temperature: 245°C±5°C Depth: DIP--2/3 , SMD--1/5	Duration: 3.0s--5.0s

7	Resistance to Soldering Heat	(1) Thickness of PCB: 1mm , Solder condition: 260°C±5°C , Duration: 10±1s (2) Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s , Recovery time : 2 ± 0.5h
---	------------------------------	---

### Recommended Reflow Soldering Diagram

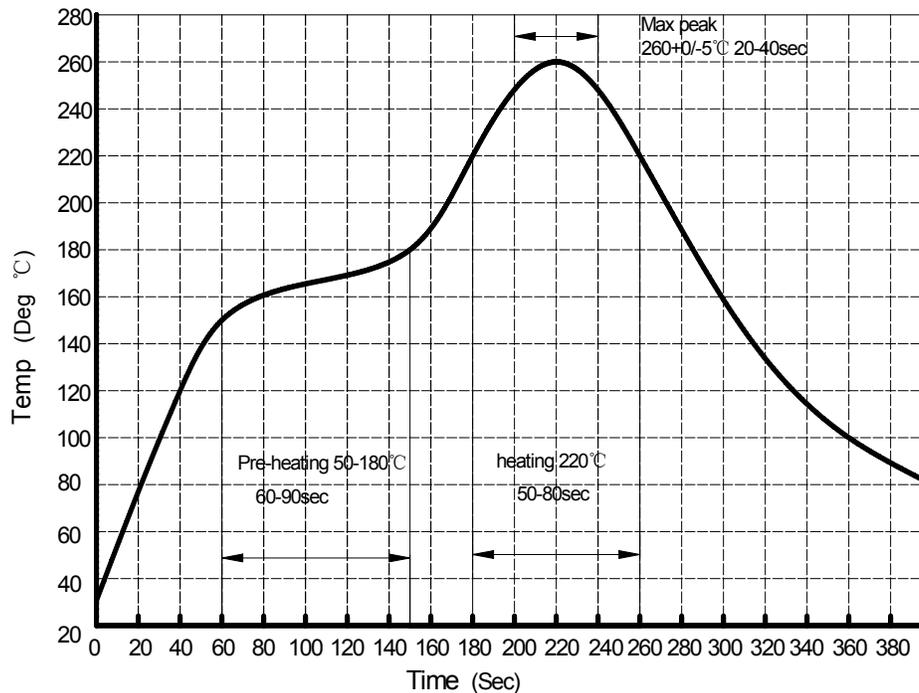

### Notes

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.