

APPROVAL SHEET

Approval Specification	Customer's Approval Certificate
TO:	Checked & Approved by:
Part No.:	Date:
Customer's Part No.:	Please return this copy as a certification of your approval

Shenzhen Huayuan Micro Electronic Technology Co.Ltd.

Tel: +86-0755-29881155-8006

Fax: +86-0755-29881157

E-mail: sfsaw_sales@163.com

QQ: 3037058772

Website: <http://www.sfsaw.com> <http://www.szhywd.net>


Add: No.5 Zhuangcun Road, Xiner Community,
Shajing Street, Baoan District, Shenzhen



Part No.	:	SFR868D
Pages	:	5
Date	:	2016/8/1
Revision	:	2.0


Features

- 1-port Resonator
- Ceramic Package for Surface Mounted Technology (SMT)
- RoHS compatible
- Package size 3.80x3.80x1.50mm³
- Package Code DCC6
- Electrostatic Sensitive Device(ESD)

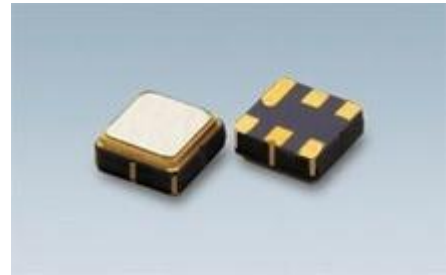


Application



Typical Low-Power Transmitter Application

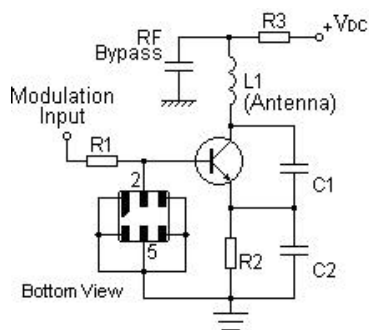

Typical Local Oscillator Application

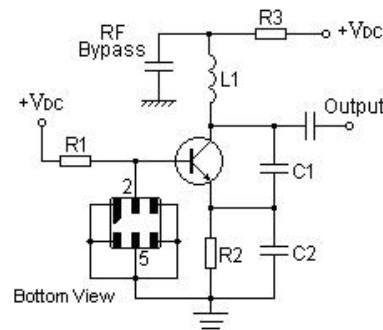

Package Dimensions (DCC6)

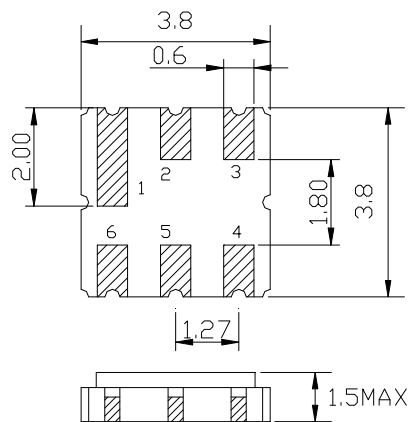

Pin Configuration


2	Input/Output
5	Input/Output
1,3,4,6	Case Ground

Marking




SF	Trademark
R	SAW Resonator
868D	Part number
●	Pin 1

Test Circuit

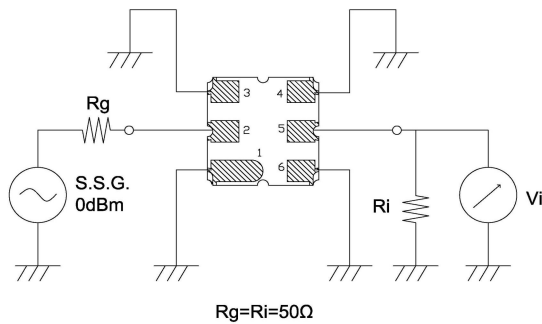

Equivalent LC Model



Performance

Maximum Rating

Item		Value	Unit
DC Voltage	V_{DC}	± 30	V
Operation Temperature	T	-40 ~ +85	°C
Storage Temperature	T_{stg}	-40 ~ +85	°C
RF Power Dissipation	P	25	dBm

Electronic Characteristics

Test Temperature: $25^\circ\text{C} \pm 2^\circ\text{C}$


Terminating source impedance: 50Ω

Terminating load impedance: 50Ω

Item			Minimum	Typical	Maximum	Unit
Center Frequency	Absolute Frequency	f_c		868.35		MHz
	Tolerance from 868.35MHz	Δf_c		± 150		KHz
Insertion Loss(min)		IL		1.0	2.0	dB
Quality Factor	Unloaded Q	Q_U		9400		
	50Ω Loaded Q	Q_L		1500		

Frequency Aging	Absolute Value during the First Year	$ f_A $		≤ 10		ppm/yr
DC Insulation Resistance between Any Two Pins			1.0			M Ω
RF Equivalent RLC Model	Motional Resistance	R_M		12.0	22.0	Ω
	Motional Inductance	L_M		32.6		μH
	Motional Capacitance	C_M		1.03		fF
	Static Capacitance	C_0	2.1	2.4	2.7	pF

Frequency Response

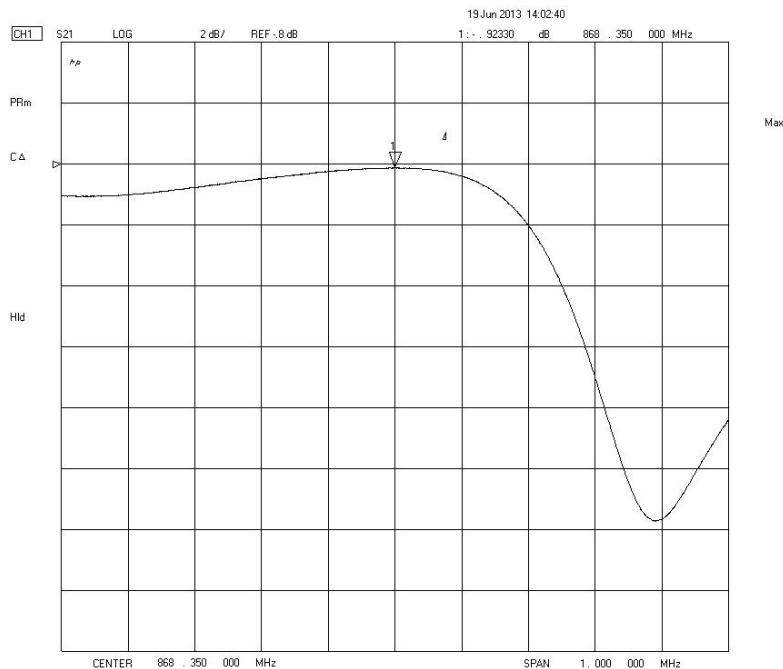


Reliability (The SAW components shall remain electrical performance after tests)

No.	Test item	Test condition
1	Temperature Storage	(1) Temperature: $85^{\circ}\text{C} \pm 2^{\circ}\text{C}$, Duration: 250h , Recovery time: $2\text{h} \pm 0.5\text{h}$ (2) Temperature: $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, Duration: 250h , Recovery time: $2\text{h} \pm 0.5\text{h}$
2	Humidity Test	Conditions: $60^{\circ}\text{C} \pm 2^{\circ}\text{C}$, 90~95% RH Duration: 250h
3	Thermal Shock	Heat cycle conditions: $T_A = -40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, $T_B = 85^{\circ}\text{C} \pm 2^{\circ}\text{C}$, $t_1 = t_2 = 30\text{min}$, Switch time: $\leq 3\text{min}$, Cycle time: 100 times , Recovery time : $2\text{h} \pm 0.5\text{h}$.
4	Vibration Fatigue	Frequency of vibration: 10~55Hz Amplitude: 1.5mm Directions: X,Y and Z Duration: 2h
5	Drop Test	Cycle time: 10 times Height: 1.0m

6	Solder Ability Test	Temperature: 245°C±5°C Duration: 3.0s~5.0s Depth: DIP--2/3 , SMD--1/5
7	Resistance to Soldering Heat	(1)Thickness of PCB:1mm , Solder condition: 260°C±5°C , Duration: 10±1s (2)Temperature of Soldering Iron: 350°C±10°C , Duration: 3~4s , Recovery time : 2 ± 0.5h

Recommended Reflow Soldering Diagram

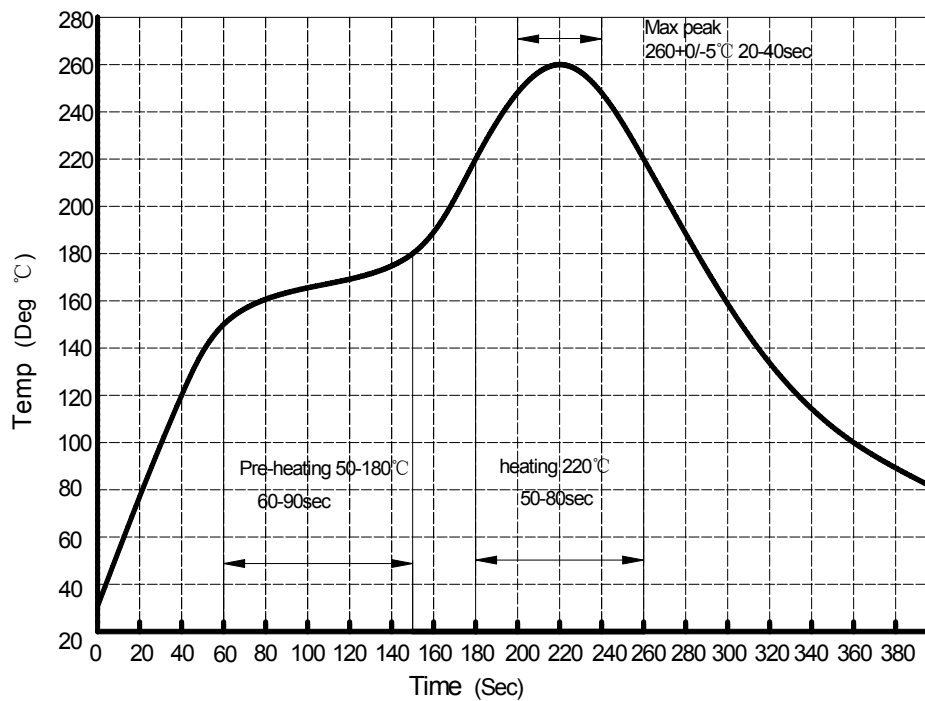

Notes

1. As a result of the particularity of inner structure of SAW products, it easy to be breakdown by electrostatic, so we should pay attention to **ESD protect** in the test.
2. **Static voltage** between signal load and ground may cause deterioration and destruction of the component. Please avoid static voltage.
3. **Ultrasonic cleaning** may cause deterioration and destruction of the component. Please avoid ultrasonic cleaning.
4. Only leads of component may **be soldered**. Please avoid soldering another part of component.
5. There is a close relationship between the device's performance and **matching network**. The specifications of this device are based on the test circuit shown above. L and C values may change depending on board layout. Values shown are intended as a guide only.