



SHENZHEN TUOFENG SEMICONDUCTOR TECHNOLOGY CO., LTD


SOT-89 Encapsulate Three-terminal Voltage Regulator

LM78L06 Three-terminal positive voltage regulator**FEATURES****Maximum Output current** I_{OM} : 0.1 A**Output voltage** V_o : 6 V**Continuous total dissipation** P_D : 0.5W**SOT-89**

1.OUT

2.GND


3.IN

**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies unless otherwise specified)

| Parameter | Symbol | Value | Units |
|--------------------------------------|-----------|----------|-------|
| Input Voltage | V_i | 30 | V |
| Operating Junction Temperature Range | T_{OPR} | 0-+125 | °C |
| Storage Temperature Range | T_{STG} | -55-+150 | °C |


ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_i=11V, I_o=40mA, C_i=0.33\mu F, C_o=0.1\mu F$, unless otherwise specified)

| Parameter | Symbol | Test conditions | MIN | TYP | MAX | UNIT |
|--------------------------|--------------|--------------------------------------|---------|------|-----|------|
| Output voltage | V_o | | 25°C | 5.75 | 6.0 | 6.25 |
| | | $8V \leq V_o \leq 20V, I_o=1mA-40mA$ | 0-125°C | 5.7 | 6.0 | 6.3 |
| | | $I_o=1mA-70mA$ | | 5.7 | 6.0 | 6.3 |
| Load Regulation | ΔV_o | $I_o=1mA-100mA$ | 25°C | 16 | 80 | mV |
| | | $I_o=1mA-40mA$ | 25°C | 9 | 40 | mV |
| Line regulation | ΔV_o | $8V \leq V_o \leq 20V$ | 25°C | 35 | 175 | mV |
| | | $9V \leq V_o \leq 20V$ | 25°C | 29 | 125 | mV |
| Quiescent Current | I_q | | 25°C | 3.9 | 6.0 | mA |
| Quiescent Current Change | ΔI_q | $9V \leq V_o \leq 20V$ | 0-125°C | | 1.5 | mA |
| | | $1mA \leq I_o \leq 40mA$ | 0-125°C | | 0.1 | mA |
| Output Noise Voltage | V_N | $10Hz \leq f \leq 100KHz$ | 25°C | 46 | | uV |
| Ripple Rejection | RR | $9V \leq V_o \leq 19V, f=120Hz$ | 0-125°C | 40 | 48 | dB |
| Dropout Voltage | V_d | | 25°C | 1.7 | | V |

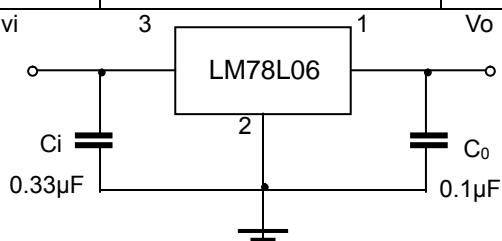
TYPICAL APPLICATION

Note : Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.


Typical Characteristics

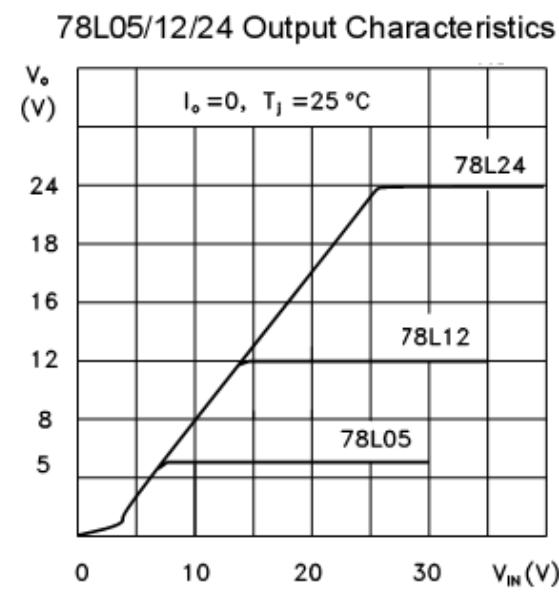


78L05/12/24 Load Characteristics

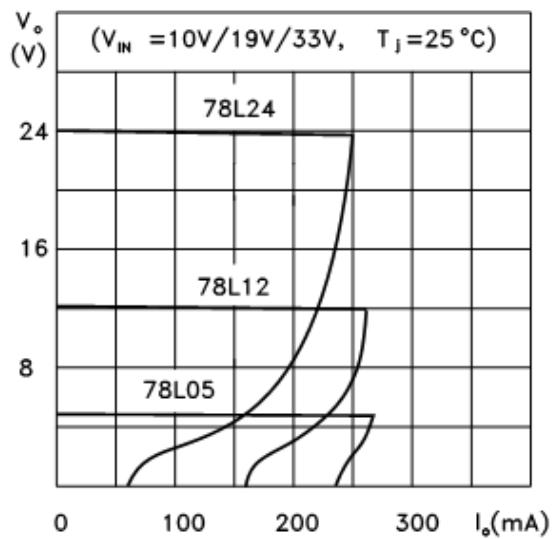


78L05/12/24 Thermal Shutdown

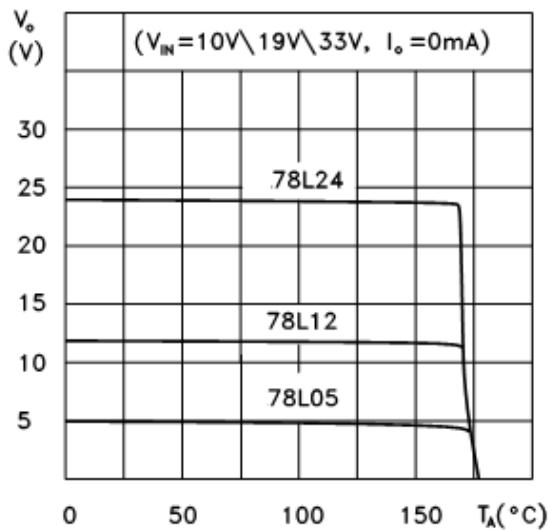

78L00 Series Short Circuit Output Current

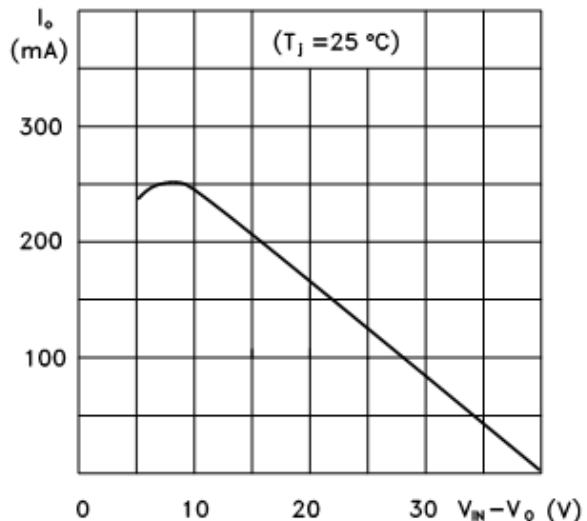

78L05 Quiescent Current vs Input Voltage

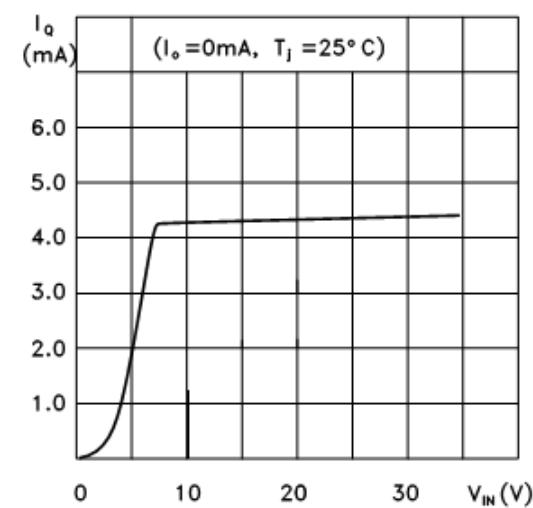

PD-TA

