



# SPECIFICATION OF PRODUCT

# 承认书

CUSTOMER:	X,K/?				
DESCRIPTION:	Piezo Buzzer				
FUSHENG P/N: _	FSR-1707L				
CUSTOMER P/N:					
DATE:	2020-05-27				

CUSTOMER	APPROVER	CHECKER
1/3	Yunqing Wu	Bing Yan

泰州福声电子科技有限公司

地址:江苏省泰州市海陵区凤凰西路 168 号

电话: 0086-523-86219066 传真: 0086-523-81601108


邮箱: sales@electronic-tech.cn

网址: www.tzfsdz.com

### 1.SPECIFICATION 规格

No.	Item	Unit	Specification	Condition
1	Oscillation Frequency	Hz	4000	square wave
2	Operating Voltage	Vp-p	1~30	
3	Rated Voltage	Vp-p	5	
4	Current Consumption	mA	MAX. 5	at Rated Voltage
5	Sound Pressure Level	dB	MIN. 85	at 10cm at Rated Voltage
6	Electrostatic Capacity	nF	15±30%	at 1000Hz
7	Operating Temperature	$^{\circ}$	-20 ~ +60	
8	Storage Temperature	$^{\circ}$	-30 ~ +70	
9	Dimension	mm	17 x H 7.0	See appearance drawing

# 2. APPEARANCE DRAWING 尺寸图

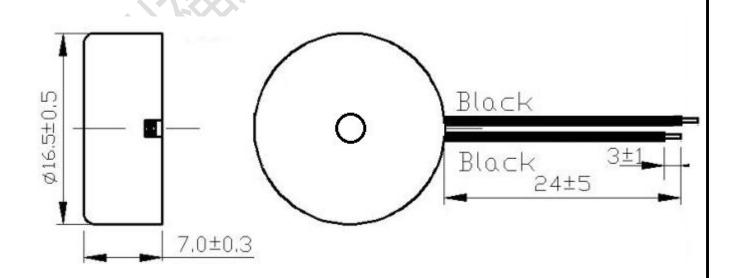

2

#### Tol: ± 0.3 Unit: mm

#### 3.TESTING METHOD 测量方式


#### **Standard Measurement conditions**

Temperature:25±2°C Humidity:45-65%


#### **Acoustic Characteristics:**

The oscillation frequency, current consumption and sound pressure are measured by the measuring instruments shown below.


3

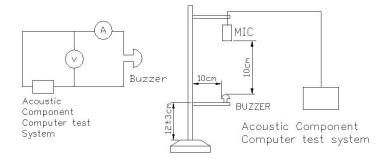

#### In the measuring test, buzzer is placed as follows:

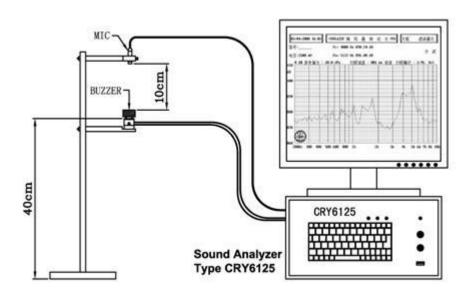


#### 4. Typical Frequency Response Curve

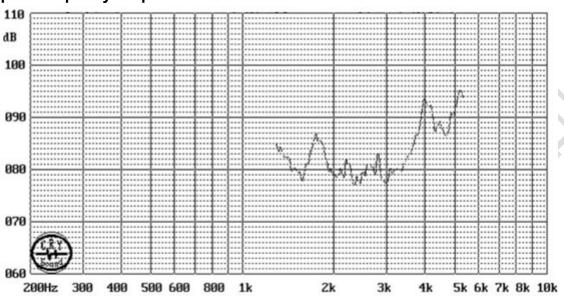

## **5.Soldering Condition**

(1)Recommendable reflow soldering condition is as follows (Reflow soldering is twice)

Note: It is requested that reflow soldering should be executed after heat of product goes down to normal.

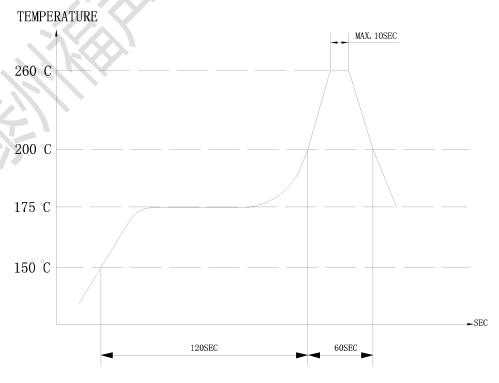

Heat resistant line

(Used when heat resistant reliability test is performed) (2)Manual soldering Manual soldering temperature 350 °C within 5 sec.

#### 6. RELIABILITY TEST

NO.	ITEM	TEST CONDITION AND REQUIREMENT		
1	High Temperature Test (Storage)	After being placed in a chamber with 80 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.		
2	Low Temperature Test (Storage)	After being Placed in a chamber with -30 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.		
3	Humidity Test	After being Placed in a chamber with 90-95% R.H. at 40 2°C for 96 hours and then being placed in normal condition for 2 hours.  Allowable variation of SPL after test: 10dB.		
4	Temperature Cycle Test	The part shall be subjected to 5 cycles. One cycle shall be consist of:  +70°C  +25°C  +25°C  +25°C  -20°C  Allowable variation of SPL after test: 10dB.		
5	Drop Test	Drop on a hard wood board of 4cm thick, any directions ,6 times, at the height of 75cm.  Allowable variation of SPL after test: 10dB.		
6	Vibration Test	After being applied vibration of amplitude of 1.5mm with 10 to 55 Hz band of vibration frequency to each of 3 perpendicular directions for 2 hours.  Allowable variation of SPL after test: 10dB.		
7	Solderability Test	Lead terminals are immersed in rosin for 5 seconds and then immersed in solder bath of +300 5°C for 3 1 seconds.  90% min. lead terminals shall be wet with solder (Except the edge of terminals).		
8	Terminal Strength Pulling Test	The force of 9.8N(1.0kg) is applied to each terminal in axial direction for 10 seconds.  No visible damage and cutting off.		

#### **TEST CONDITION.**

Standard Test Condition : a) Temperature : +5 ~ +35°C b) Humidity : 45-85% c) Pressure : 860-1060mbar

5

#### 泰州福声电子科技有限公司-----电声产品专业制造商

#### FUSHENG ELECTRONICS-----Acoustic Components Professional Manufacturer