

40V 250mA Ultralow-Quiescent-Current LDO

General Description

The GM7333 ultra-low quiescent current regulator features low dropout voltage and low current in the standby mode. With less than 1.5 μ A quiescent current at no load, the GM7333 is ideally suited for standby micro-control-unit systems, especially for always-on applications like E-meters, fire alarms, smoke detectors and other battery operated systems. The GM7333 retains all of the features that are common to low dropout regulators including a low dropout PMOS pass device, short circuit protection, and thermal shutdown.

The GM7333 has a 40-V maximum operating voltage limit, a -40°C to 125°C operating temperature range, and $\pm 2\%$ output voltage tolerance over the entire output current, input voltage, and temperature range. The GM7333 is available in a SOT893 through-hole and SOT235, surface mount packages.

Ordering Information

Part Number	Package	Ordering Number
GM7333	SOT893	GM7333
	SOT235	GM7333K

Features

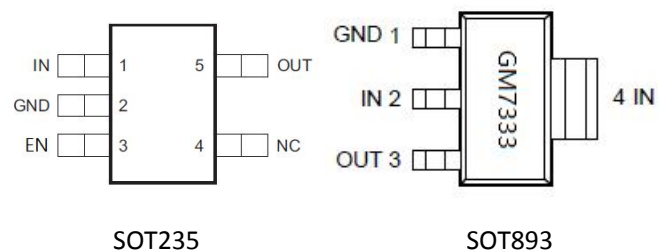
- VIN Range up to 40V
- Output Voltage Tolerances of $\pm 2\%$ Over the Temperature Range
- Output Current of 250 mA

- Ultra Low Quiescent Current ($I_Q = 1.5 \mu A$)
- Dropout Voltage Typically 1200 mV at $I_{OUT} = 250 \text{ mA}$
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limit
- Ceramic Capacitor Stable



Applications

- E-meters, Water Meters and Gas Meters
- Fire Alarm, Smoke Detector
- Appliances and White Goods

Pin Configuration




Typical Application Circuit

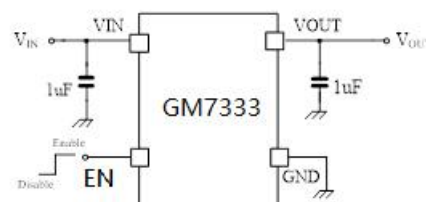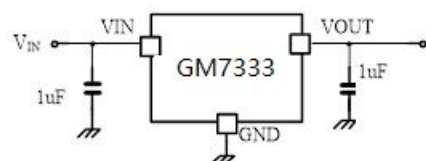

Pin Assignment

Pin Name	Pin No. SOT235	Pin No. SOT893	Pin Function
VOUT	5	3	Output Voltage Pin
GND	2	1	Ground
VIN	1	2,4	Input Voltage pin.
EN	3	--	Enable

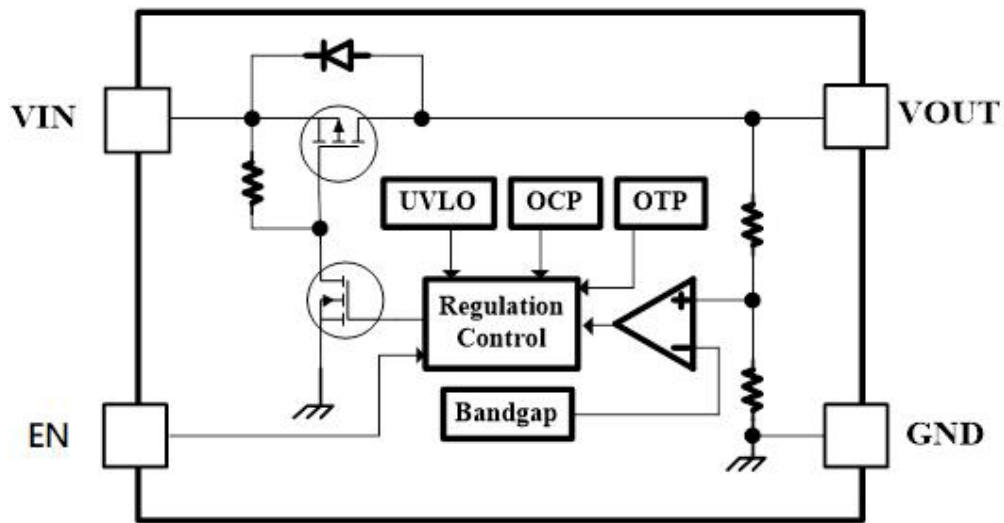Function Block Diagram



Absolute Maximum Ratings (Note1)

- V_{IN} ----- -0.3V to +45V
- Junction Temperature----- 125°C
- Lead Temperature (Soldering, 10 sec.)----- 300°C
- Storage Temperature ----- -65°C to 150°C

Recommended Operating Conditions

- Input Voltage, V_{IN} ----- +2.7V to +40V
- Junction Temperature ----- -40°C to 125°C

Electrical Characteristics

$V_{IN}=V_{OUT} + 1V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=2.2\mu F$, $T_J=25^\circ C$, unless otherwise specified

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Output Voltage	V_{OUT}		-2%	3.3	2%	V
Line Regulation	ΔV_{LINE}	$V_{IN}=V_{OUT} + 1V$ to 40V,		8	12	mV
Load Regulation	ΔV_{LOAD}	$I_{OUT}= 1mA$ to 100mA		3	15	mV
		$I_{OUT}= 1mA$ to 250mA		15	30	
Dropout Voltage	V_{DROP}	$I_{OUT}=100mA$		400		mV
		$I_{OUT}=250mA$		1200		mV
Quiescent Current	I_Q	$T_J= 25^\circ C$		1.5	2	uA
Current Limit	I_{CL}		270	300		mA
Enable high level	V_{ENHI}		0.9			V
Enable low level	V_{ENLO}				0.4	V
Enable pin pull high current	I_{EN}			0.3		uA

Typical Characteristics

$V_{IN}=V_{OUT} + 1V$, $I_{OUT}=1mA$, $V_{OUT}=3.3V$, $C_{IN}=C_{OUT}=1\mu F$, $T_J=25^{\circ}C$, unless otherwise specified

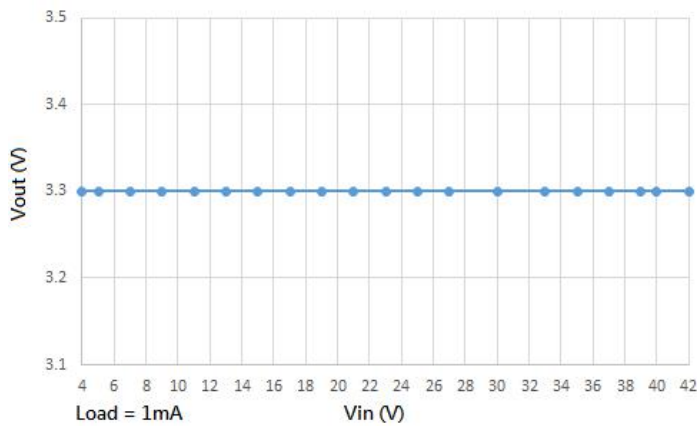


Fig 1 Vout vs Vin

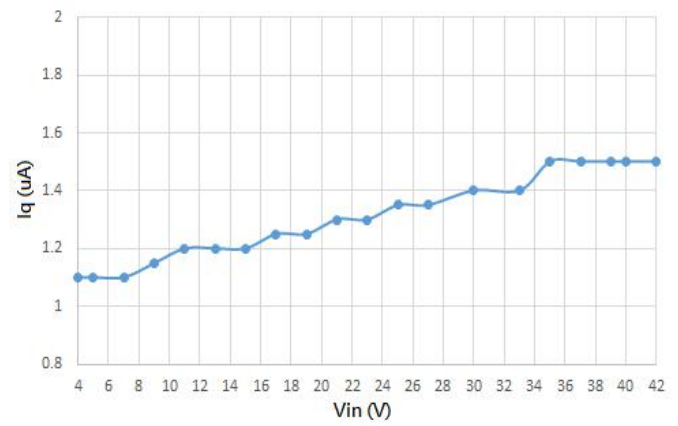


Fig 2 Iq vs Vin

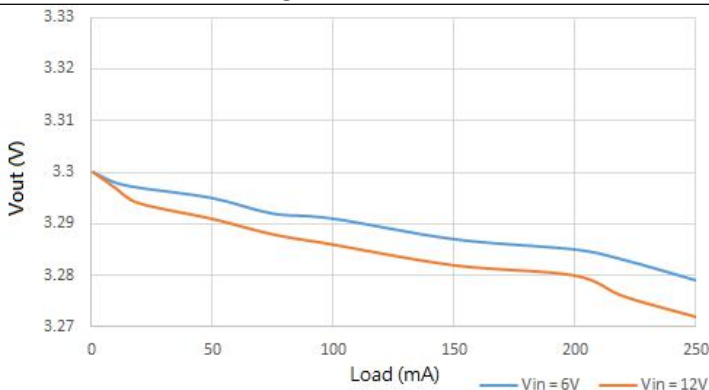


Fig 3 Vout vs Load

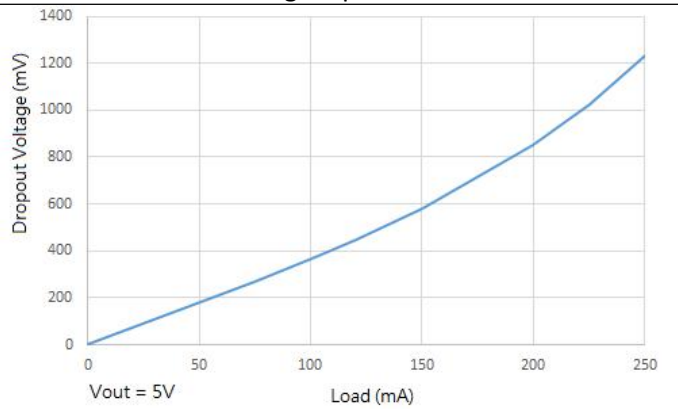


Fig 4 Dropout vs Load

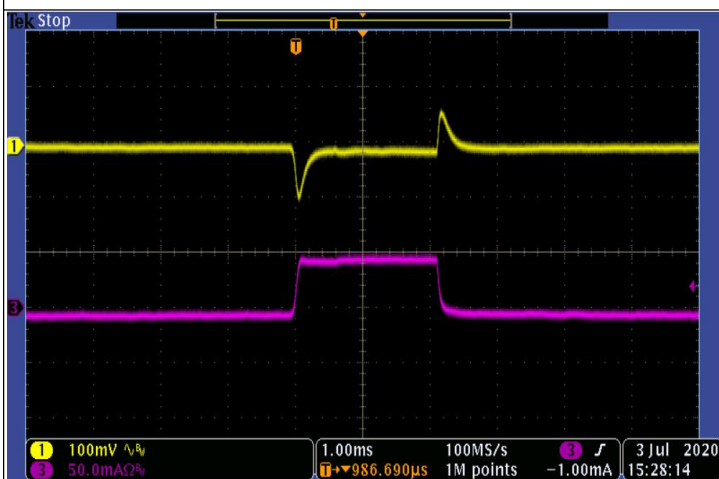


Fig 5 Vout Load Transient (0 to 50mA)

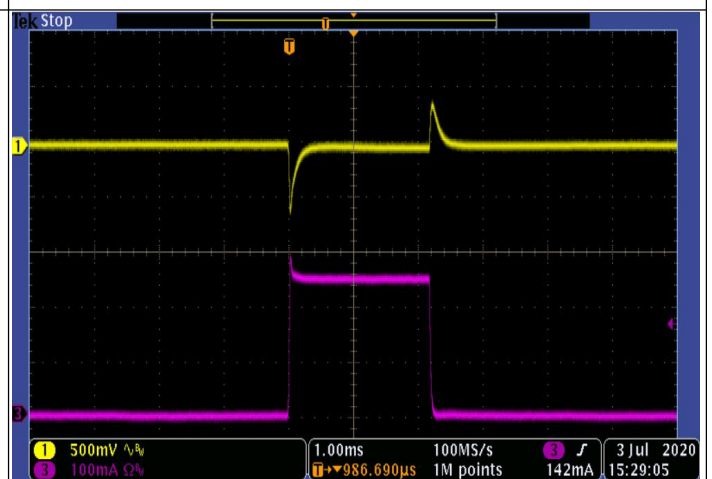


Fig 6 Vout Load Transient (1 to 250mA)

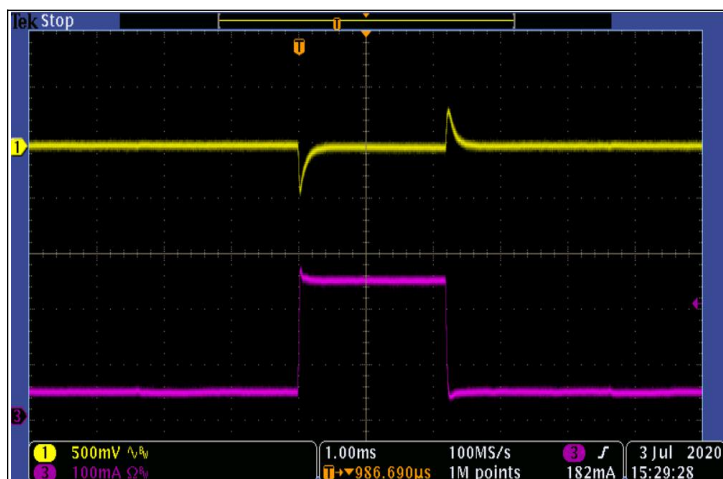


Fig 7 Vout Load Transient (50 to 250mA)

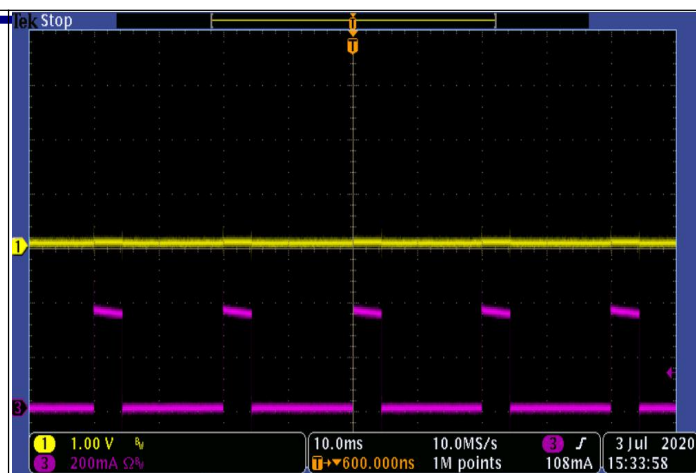
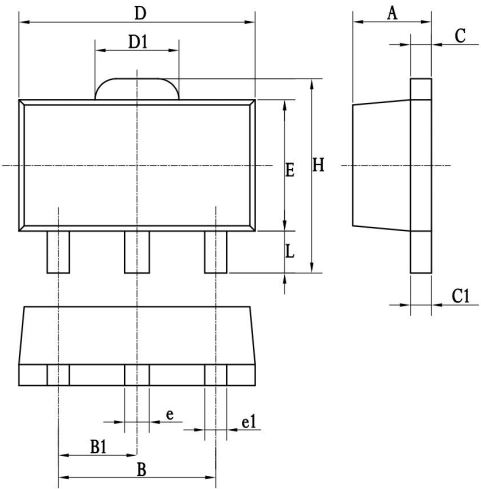


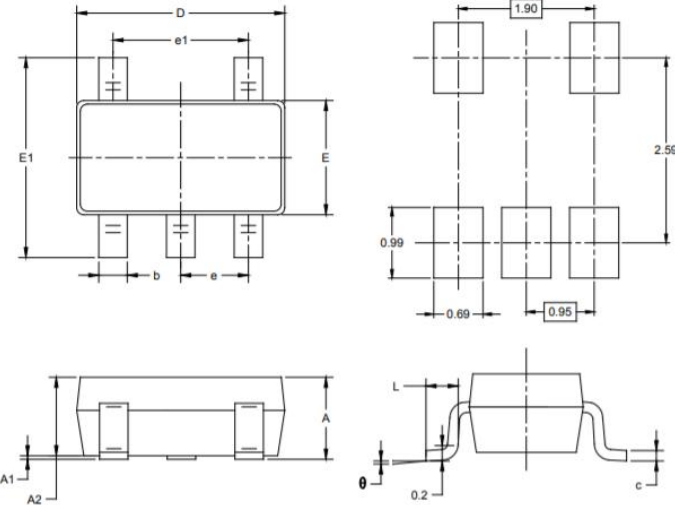
Fig 8 Vout Short to GND



Fig 9 Vin Start up

Package Information

SOT89-3 						
符号	毫米			英寸		
	最小值	典型值	最大值	最小值	典型值	最大值
A	1.4	1.5	1.6	-	-	-
B	2.8	3	3.2	-	-	-
B1	1.4	1.5	1.6	-	-	-
C	0.3	0.4	0.5	-	-	-
C1	0.3	0.4	0.5	-	-	-
D	4.4	4.5	4.6	-	-	-
D1	1.4	1.6	1.8	-	-	-
E	2.4	2.5	2.6	-	-	-
e	0.37	0.47	0.57	-	-	-
e1	0.22	0.42	0.62	-	-	-
H	-	-	4.25	-	-	-
L	0.8	-	-	-	-	-

SOT23-5						
						
符号	毫米			英寸		
	最小值	典型值	最大值	最小值	典型值	最大值
A	1.05	1.15	1.25	-	-	-
A1	0.0	0.05	0.1	-	-	-
A2	1.05	1.1	1.15	-	-	-
b	0.3	0.4	0.5	-	-	-
c	0.1	0.15	0.2	-	-	-
D	2.82	2.92	3.02	-	-	-
E	1.5	1.6	1.7	-	-	-
E1	2.65	2.8	2.95	-	-	-
e		0.95		-	-	-
e1		1.9		-	-	-
L	0.3	-	0.6	-	-	-
θ	0°	-	8°	-	-	-