Title.: TACT SWITCH

Product Model.: KTD0621-0501C0101

Customer's Part NO:

Customer's Model:

Customer's Approval Requested.

Please return this copy as a certification of your approval.

Checked by: Date:

Approved by: Date:

APPROVE	REVIEW	POLT	
Jack Wu	孙斌	张杰	

Shenzhen Gangyuan Microkey Technology Co.,ltd



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KTD0621-0501C0101	TACT SWITCH	А

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

Operating Temperature Range

- -40℃~90℃(在标准大气压、标准湿度条件下)
- -40 °C ~90 °C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30°C ~80°C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidity.....relative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa~106Kpa



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KTD0621-0501C0101	TACT SWITCH	Α

2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 16V, 50mA (最大值)

Ratings: 16V DC, 50mA (Max)

3. 电气性能:

ELECTRICAL SPECIFICATION

项	目	试 验 条 件	要求		
IT	EM	TEST CONDITIONS	REQUIREMENTS		
		在以 5V 10mA的直流电源或不低于 1KHz 的交流电源的电路中,以一个等于 2 倍按力的静负荷施加于手柄中心			
	接触电阻	Applying a static load of 2 times operating force to	<100.0		
1	Contact Resistance	the center of the stem, measurements shall be made by	≤100mΩ		
		5V DC 10mA or more than 1KHZ AC small-current			
		contact resistance meter.			
2	绝缘电阻 Insulation Resistance	在端子之间施加 DC 100V /1min 的条件下,测量端子之间底座、盖板的电阻值 Measurement shall be made following application of 100V DC potential, across terminals, and across terminals and cover, for one minute.	≥100MΩ		
3	介质耐压 Dielectric voltage proof	在端子之间施加 250V AC(50HZ 或 60HZ)/1min 250V AC (50HZ or 60HZ) shall be applied across terminals, for one minute.	无击穿、无飞弧 There should be no breakdown and flashover		



	UAIT	JIUAN	ALLINOVAL		1110110
С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KTD0621-0501C0101 TACT SWITCH		A
	项目		试验条件		要求
	ITEM	-	TEST CONDITIONS		REQUIREMENTS
4	触点抖动 Bounce	在导通和断开过程中测 Lightly striking the cel	nter of the stem at a ratifimes per second), and FF"	te encountered in bounce shall be	ON-10 msec.max OFF-10 msec.max
	械性能: HANICAL SPECI 	FICATION			
1	操作力 Operating Force	量开关导通所需的最大 Placing the switch suc vertical and then grad	ch that the direction of solurally increasing the load maximum load required	witch operation is ad applied to the	230 ± 50
2	行程 Travel	开关驱动件顶端中心, Placing the switch suc vertical and then apply	ch that the direction of so ring static load of 2times the travel distance for the	witch operation is operating force to	1.3 ± 0.1 mm



	GANO	GYUAN	APPROVAL	SPECIFIC	CAT	IONS
С	CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION
			KTD0621-0501C0101	TACT SWITCH	1	А
	项目 ITEM	1	试验条件 FEST CONDITIONS		F	要求 REQUIREMENTS
3	回弹力 Return Force	开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程后,测量顶端向自由位置转换的力度。 The sample switch is installed such that the direction of switch operation is vertical and upon depressing the stem in its center to the whole travel distance, the force of the stem to return to its free position shall be measured.				40gf Min
4	停止强度 Stop Strength	开关垂直于操作方向放置,从操作方向向驱动件施加 30N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min.			The	无机械和电气损坏 re shall be no sign of age mechanically and electrically.
5	手柄拔出 强度 Stem Strength	开关垂直于操作方向放置,反方向实施最大操作力,并测量手柄的行程范围。 Placing the switch such that the direction of switch operation is vertical, and then the maximum force to withstand a pull applied opposite to the direction of stem operation shall be measured.				20N.min.
6	可焊性 Solderability	在以下设定条件下进行测量: Measurements shall be made following the test set forth below: (1) 焊接温度:245±5℃ Solder temperature: 245±5℃ (2) 浸入时间:2s±0.5s Immersion time: 2s±0.5s 对于其它步骤参考《GB 5095.6—86》试验 12a The other steps please refer to《GB 5095.6-86》TEST 12a			90% L Excel coatir	缘外涂层应均匀覆盖 以上 pt for the edge, the ng should cover a num 90%



C	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION	
			KTD0621-0501C0101 TACT SWITCH			
	项目		试验条件		要求	
	ITEM		TEST CONDITIONS		REQUIREMENTS	
	限电气性能: RONMENTAL SP	ECIFICATION				
1	低温测试 Resistance low temperature	标准湿度的环境中 Following the test normal temperatur measurements are (1) 温度: -30±	Temperature:-30±2℃ Item 3			
2	高温测试 Heat resistance	标准湿度的环境中 Following the test normal temperatur measurements are (1) 温度: 80±2	temperature:80±2℃ (2) 时间: 96h			
3	温度周期性测试 Change of temperature	样品应放在常温及标试期间样品应保持After 5 cycles of allowed to stand conditions for 1 h. the test water drops	根据下面的测试要求进行 5 次循环的温度周期性测试, 实验后样品应放在常温及标准湿度的环境中 1 小时后做性能测试。测试期间样品应保持干燥. After 5 cycles of following conditions, the sample shall be allowed to stand under normal temperature and humidity conditions for 1 h. and measurements shall be made. During the test water drops shall be removed. Temperature Time			



С	SUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KTD0621-0501C0101 TACT SWITCH		
	项目 ITEM		试验条件 TEST CONDITIONS		要求 REQUIREMENTS
4	湿温测试 Moisture resistance	标准湿度的环境中 1 Following the test some normal temperature measurements are (1) 温度: 60±2 temperature: (2) 相对湿度: 9	temperature: 60±2℃ (2) 相对湿度: 90%~95% relative humidity:90% to 95% (3) 时间: 96h		
5	硫化试验 Sulfuration resistance	标准湿度的环境中 1 Following the test some normal temperature measurements are (1) H ₂ S 气体浓的 H ₂ S gas cond (2) 时间: 72h Time: 72h (3) 温度: 40±2%	H ₂ S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h		
6	盐雾试验 Salt Mist	The switch shall b (1)温度: 35℃±2 temperature: (2)盐溶液浓度: salt solution: (3)时间: 8h±1h Time: 8h±1 hc 实验后的盐沉积物后	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution: 5±1%(solids by mass) (3) 时间: 8h±1h Time: 8h±1 hour 实验后的盐沉积物后水冲掉 After test, salt deposit shall be removed by running water.		



С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
			KTD0621-0501C0101	TACT SWITCH	A
	 限机械性能 : :NDURANCE SPI	ECIFICATION			
	项目		试 验 条 件		要求
	ITEM		TEST CONDITIONS		REQUIREMENTS
1	工作寿命 Operation life	Measurement shall (1) DC 5V,1mA (2) 按动速率: 60 Rate of oper (3) 按力: 按力的 (4) Operating Fo (5) 寿命: 100,	根据下面的测试要求进行测试: Measurement shall be made following the test set forth below: (1) DC 5V,1mA 带负载 / DC 5V,1mA resistive load (2) 按动速率: 60 次/分 Rate of operation: 60 times/mim. (3) 按力: 按力的 1.5 倍 (4) Operating Force: Operating Force1.5 倍		
2	振动 Vibration	Measurement shall (1) 振动频率范围: Vibration frequence (2) 振幅(峰一峰) (3) 振动方向: 包括 Direction of vibus direction included	根据以下给定条件进行测试: Measurement shall be made following the test set forth below: (1) 振动频率范围: 10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm / Amplitude: 1.5mm (3) 振动方向: 包括手柄行程方向在内的三个相互垂直的方向Direction of vibration:Three mutually perpendicular direction including the direction of stem travel (1) 测试时间: 每次 2hours / Duration: Each 2hours.		
3	Shock	Switch shall be mea 1.安装方法: 正常多 Mounting method 2.加速 490 m/s2(5 3.持续时间: 11 ms 4.测试方向: 6 个方 5.冲击次数: 每个方	开关应在实验后测量 Switch shall be measured after following test. 1.安装方法: 正常安装 Mounting method: Normal mounting method 2.加速 490 m/s2(50G) Acceleration:490 m/s2 (50 G) 3.持续时间: 11 ms Duration: 11 ms 4.测试方向: 6 个方向 Test direction: 6 directions 5.冲击次数: 每个方向 3 次(18 次计) Number of shocks: 3 times per direction(18		项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3
7.焊接条件: SOLDERING CONDITIONS:					
JOLL	LIMITO GOMBITI		Z. 4. 社 年 10 10 10 10 10 10 10	notice according to be	low conditions:
	 手工焊接		条件进行焊接: Please pra	_	
7.1	テエ <i>序</i> 接 Hand soldering	·	.度:≤350℃ / Solderi		
		(2) 连续焊	接时间: ≤3 s / Continu	uous soldering time: 3	3 s Max.



CUSTOMER	CUSTOMER'S P/N	CUSTOMER'S P/N GYE'S P/N PRODUCT REVISION					
		KTD0621-0501C0101 TACT SWITCH A					
项目		推考	条件				
ITEM		Recommen	ded conditions				
回流焊 7.2 Conditions for reflow	温度(*C) 180 - 150 -	120sec max.(预 3 to 4 m 炉内通过	热) 40s m	—— 时间			


说明: 1.1 开关浸焊后,注意不要用溶剂清洗。


After switches were soldered, please be careful not to clean switches with solvent.


- 1.2 在使用烙铁的情况下,焊锡温度应在 350℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 350℃ max and 3 sec.max.
- 1.3 浸焊后,注意不要在顶部施加负荷。
 Right after switches were soidered; please be careful not to load to on the knobs of switches.
- 2 设计中应注意的事项(Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。
 Follow recommended P.W.B. piercing plan in outside drawing page.
- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关
 Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .





CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KTD0621-0501C0101	TACT SWITCH	А

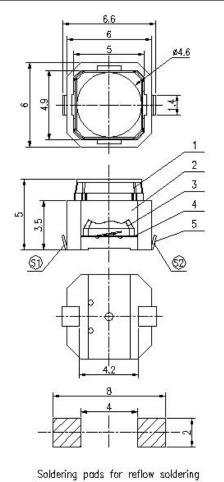









General tolerance: ±0.2mm

Outroral ton	John Charles Colorados 20.211111						
NO.	NAME	MATERIAL	QTY	FINISHING			
1	STEM	PA	1	BLACK			
2	CASE	LCP	1	BLACK			
3	CONTACT	SILICONE	1	YELLOW / BULE / RED			
4	CONTACT	C5210	1	Ag plated			
5	TERMINAL	C5191	1	Ag plated			