Common Mode Line Filter

ALFT-04





> FEATURES:

- Presents High Common Mode Impedance
- Enables significant noise suppression at high frequency

► APPLICATIONS:

- Filtering common mode noise in USB, IEEE1394, LVDS, Digital Camera, Scanner.
- Digital audio and video equipments such as PDA, DSC, DVC, DVD Player.

ELECTRICAL SPECIFICATIONS:

Operating Temperature

Storage Temperature

-25°C to +85°C

-25°C to +85°C

Part Number	L (mH) ± 20%	DCR Max (mΩ)	I _{rate} Max (A)	Max. Lead Diameter (±0.005")
ALFT-04-1	0.24	5.0	6.0	0.0511
ALFT-04-2	0.35	6.0	6.0	0.0511
ALFT-04-3	0.50	7.0	6.0	0.0511
ALFT-04-4	1.00	10.0	4.0	0.0405
ALFT-04-5	2.00	13.0	4.0	0.0405
ALFT-04-6	3.00	16.0	3.7	0.0405
ALFT-04-7	4.50	20.0	3.7	0.0405
ALFT-04-8	7.00	30.0	3.5	0.0405
ALFT-04-9	10.00	40.0	3.0	0.0405
ALFT-04-10	0.12	4.5	6.0	0.0511


Turns Ratio: $1:1 \pm 2\%$ Hipot: $2000V_{RMS}$

 I_{rate} : Based on temperature rise (ΔT : $40^{\circ}C$ max)

Test Conditions

Test Freq for L: 1KHz, 0.1Vrms

OUTLINE DRAWING:

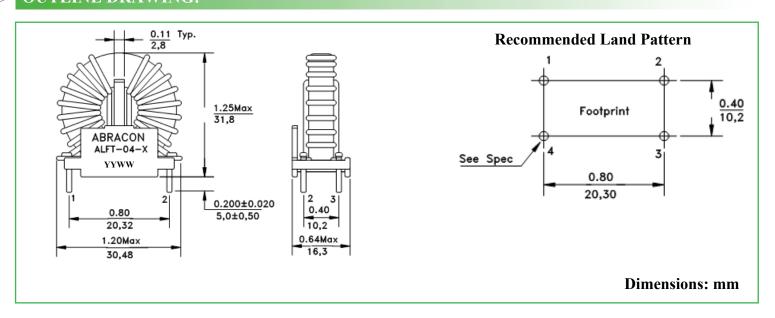





Common Mode Line Filter

ALFT-04






MATERIALS

Part Name	UL file Number	Supplier
Magnet Wire	E234565	Dezgou Feilong Electrical Material Co.
		DONGGUAN CITY HUMEN EATTO INSULATION MATERIAL
Epoxy	E218090	FACTORY
Epoxy	E105888	SHAW HUOW ENTERPRISE CO LTD
Base	E59481(S)	CHANG CHUN PLASTICS CO. LTD

SCHEMATICS

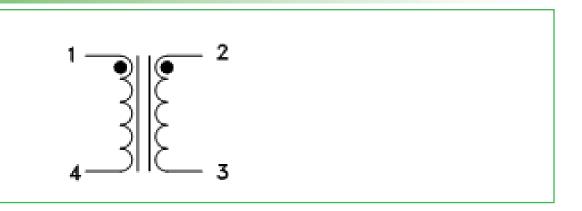

Packing 100pcs/Box

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.



