# ALUMINUM ELECTROLYTIC CAPACITORS SPECIFICATION SHEET

## Halogen Free

CUSTOMER PART No.		
Rubycon PART No.	YXM SERIES (Option Code : M	BL)
DRAWING No.	REE – 113085	ISSUE No.
ISSUE DATE	8 June 2015	



1938-1, NISHIMINOWA, INA-SHI, NAGANO-KEN, JAPAN TEL No. 0265-72-7116 FAX No. 0265-73-3380

	YUICHI KOBAYASHI
DESIGN	y farting oshi
	TAKESHI KOBAYASHI
CHECK	7 Hobayashi
	HIROKAZU KOUMURA
APPROVAL	H. Koumura

			REVISIONS			
ISSUE No.	REVISION MARK	DATE	DESCRIPTION		CH.	APP.
2		10 Dec.2014	Added Halogen Free.		T.K	H.K
3		8 June 2015	<ul> <li>Added below item.</li> <li>10V to 16V all item, 25V 33μF 5X11,35</li> <li>50V 1 to 4.7μF 5X11, 63V to 100V all ite</li> <li>Added Taping (Code: T1).</li> </ul>	V all item, em.	T.K	H.K
			Rubycon	1et 1991 IE	10 /	pril 2012
	YXM SERII	ES	RUBYCON CORPORATION	1st. ISSUE DRAWING No.		April 2013 E-113085

1. Scope.

This specification covers polarized aluminum electrolytic capacitors with non-solid electrolyte for use in electronic equipments .

2. Reference Standard

JIS C 5141 (1991) and JIS C 5102 (1994) methods for testing.

3. Operating Temperature Range

-40°C to +105°C

4. Performance Refer to Table-1

5. Style and Numbering System

(1) Style CE 04 (Radial Leaded)

(2) Numbering System Rated Series Nominal Tolerance Option Lead Case size Code Voltage Capacitance Forming MBL **YXM** M

6. Marking

Unless otherwise specified, capacitor shall be clearly marked the following items on its body.

Sleeve color: Black Lettering color: White

(1) Trade mark
(2) Rated Voltage

(3) Nominal Capacitance μF
 (4) Polarity (Negative Polarity)

(5) Series(6) Date code

(7) Maximum Operating Temperature 105°C
(8) PET sleeve mark PET

7 Vent

On capacitors whose diameter is 6.3mm and greater, a safety vent shall be provided.

- 8. Notes on use of aluminum electrolytic capacitors
  - (1) Charge and discharge

Do not use for the circuit that repeats quick charge or discharge.

(2) External stress

Do not apply excessive force of pushing, pulling bending, and/or twisting to the main body, lead wire and terminals.

(3) Heat resistance at soldering process

In the soldering process of PC board with Capacitors mounted, secondary shrinkage or crack of sleeve may be observed when soldering temperature is too high and /or soldering time is too long.

If lead wire of other components or pattern of double sided PC board touches the capacitor, the similar failure may be also originated at pre-heating, heating at hardening process of adhesive and soldering process.

(4) Insulation and PC board mounting

Sleeve is for marking purpose only.

It is not recognized as insulation materials.

When double sided PC board is employed, note that it could cause a short circuit if lead wire of other components or pattern of double sided PC board touches capacitor. Please avoid circuit pattern runs underneath capacitor.

In addition, case and cathode terminal are not insulated.

(5) Adhesives and coating materials

Do not use the adhesives and coating materials that contain halogenated organic solvents or chloroprene as polymer.

(6) Storage

Keep at a normal temperature and humidity. During a long storage time, leakage current will be increased. To prevent heat rise or any trouble that high leakage current possibly causes, voltage treatment is recommended for the capacitors that have been stored for a long time.

<Storage Condition>

\*Aluminum electrolytic capacitors should not be stored in high temperatures or where there is a high level of humidity. The suitable storage condition is 5°C-35°C and less than 75% in relative humidity.

\*Aluminum electrolytic capacitors should not be stored in damp conditions such as water, saltwater spray or oil spray.

\*Do not store aluminum electrolytic capacitors in an environment full of hazardous gas (hydrogen sulfide, sulfurous acid gas, nitrous acid, chlorine gas, ammonia or bromine gas).

\*Aluminum electrolytic capacitors should not be stored under exposure to ozone, ultraviolet rays or radiation.



#### (7) Fumigation and halogenated flame retardant

It may cause corrosion of internal electrodes, aluminum cases and terminal surface when the following conditions exist.

\*Fumigation of wooden pallets before shipment to disinfect vermin.

- \*Existence of components or parts that contain halogenated flame retardant agent (bromine etc.) together with capacitors. \*When halogenated detergents of antiseptics for preventing infection of epidemic diseases contact directly to capacitors.

(8) PC board cleaning after soldering Please consult us when cleaning is subjected.

♦ Guide to application except the above are described in our catalog and EIAJ RCR-2367C.

EIAJ RCR-2367C: "Safety Application Guide for fixed aluminum electrolytic capacitors for use in electronic equipment."

Published by Japan Electronics and Information Technology Industries Association.

### ◆Table-1 PERFORMANCE

	ITEMS					PER	FORMA	ANCE				
1	Rated Voltage(WV) Surge Voltage (SV)	WV(V.DC) SV(V.DC)	10	16 20	25 32	35 44	50 63	63 79	100 125			
2	Nominal Capacitance (Capacitance Tolerance)	<pre><criteria> 1 to 330μF(±20%) <condition>    Measuring Free    Measuring Vol    Measuring Ter</condition></criteria></pre>	quency tage	: No		% han 0.5	Vrms +	1.5 to 2	.0V.DC			
3	Leakage Current	reach the rated after the voltage the current value <pre><criteria> I=0.01CV or where</criteria></pre>	The rated voltage shall be applied between terminals of capacitor such that the terminal voltage wi reach the rated voltage within one minute and the leakage current shall be measured at following time after the voltage has reached the rated voltage across a $1000 \pm 10~\Omega$ series protection resister. Then the current value shall not exceed value calculated from following formula. <criteria> I=0.01CV or <math>3\mu\text{A}</math> whichever is greater</criteria>						me			
4	Dissipation Factor (tanδ:Tangent of loss angle)	<criteria> WV(V.DC) tanδ <condition> See ITEM 2, No</condition></criteria>	10 0.45 ominal C	16 0.35 Capacita	25 0.30 nce, for	35 0.22 measur	50 0.19	63 0.17 uency,	100 0.15 voltage a	and temperature		
5	Terminal Strength	See ITEM 2, Nominal Capacitance, for measuring frequency, voltage and temperature. <condition> Tensile Strength of Terminals         The body of capacitor shall be fixed and the tensile force of following table shall be applied to the terminal in lead out direction of the terminal for 10±1 seconds. Bending Strength of Terminals         The body of capacitor shall be held in such a way that the regular lead-out axis of lead wire terminal becomes vertical. The weight of following table shall be suspended from the end of terminal. In this condition, after the body of sample is bent through 90 degrees, it shall be returned to the original position. Next the body shall be reversibly bent through 90 degrees and again returned to the original position. Diameter of lead wire</condition>					nal this					

	Coefficient and Drift	10		ndition>											1	
Coemcient and Dint		STEP	Testing Te	mperatu	ıre (°C)	)			Tin	ne						
			1		20±2			Tim	e to rea	ach the	ermal e	quili	briu	ım		
			2		-25±3					//	/					
			3		20±2					//	/					
			4		105±2					2 h	rs.					
			5		20±2			Tim	e to rea	ach the	ermal e	quili	briu	ım		
			Capacita	nce, D.F. an	d Imped	dance s	shall be	e meas	ured at	120Hz	Z.				l	
		<c< td=""><td>riteria&gt;</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></c<>	riteria>													
			STEP 2	Impeda	ance Ra	atio		The va			STEF	P 1 i	not	more	than va	ue o
			STEP 4	Capaci	tance C	hange					value o	of ST	ΈP	1		
				Dissipa	ation Fa	ctor		Not mo	ore tha	n the s	pecifie	d va	lue			
					ge Curre						es the				е	
			STEP 5		tance C						value o			1		
				Dissipa	ation Fa	ctor		Not mo	ore tha	n the s	pecified	d va	lue			
			WV	(V.DC)	10	16	25	35	50	63	100					
				( /												
			7(-25°C)	/Z(+20°C)	8	6	4	4	3	3	3					
_				/Z(+20°C)	8	6	4	4	3	3	3					
7	Load Life Test	pr re < <u>C</u>	ondition> Capacitor otective re turned in s	under the sesistor (with standard con	test sha maxim	all be a um ripp or 1 to 2	applied ple cur 2 hours	I the rarrent) a	ated vo t 105± he cap	oltage 2°C fo acitor s	continu r 1000 shall m	00 +72	2 ho	urs. A	fter the	test
7	Load Life Test	pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C</td><td>under the sesistor (with standard con</td><td>test sha maxim</td><td>all be a um rippor 1 to 2</td><td>applied ple cur 2 hours more t</td><td>I the rarrent) a</td><td>ated votated to the table to the table tab</td><td>oltage 2°C fo acitor s</td><td>continu r 1000 shall m</td><td>00 +72</td><td>2 ho</td><td>urs. A</td><td>fter the</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C	under the sesistor (with standard con	test sha maxim	all be a um rippor 1 to 2	applied ple cur 2 hours more t	I the rarrent) a	ated votated to the table to the table tab	oltage 2°C fo acitor s	continu r 1000 shall m	00 +72	2 ho	urs. A	fter the	test
7	Load Life Test	pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C</td><td>under the sesistor (with standard cor Current ce Change</td><td>test sha maxim</td><td>all be a um rippor 1 to 2</td><td>applied ple cur 2 hours more t nin ±25</td><td>I the rarent) a s, and t</td><td>ated vont 105± he cap specime specime initia</td><td>oltage 2°C fo acitor s fied va I value</td><td>continu r 1000 shall m</td><td>00 <sup>+72</sup>(leet f</td><td>o hor</td><td>urs. A</td><td>fter the</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C	under the sesistor (with standard cor Current ce Change	test sha maxim	all be a um rippor 1 to 2	applied ple cur 2 hours more t nin ±25	I the rarent) a s, and t	ated vont 105± he cap specime specime initia	oltage 2°C fo acitor s fied va I value	continu r 1000 shall m	00 <sup>+72</sup> (leet f	o hor	urs. A	fter the	test
7	Load Life Test	pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C</td><td>under the resistor (with standard con Current ce Change</td><td>test sha maxim</td><td>Not</td><td>applied ple cur 2 hours more t nin ±25 more t</td><td>If the racrent) a s, and the than the than 30</td><td>ated votated votated to the cape specime initia</td><td>oltage 2°C fo acitor s fied va I value the spe</td><td>continur 1000 shall me</td><td>value</td><td>follo</td><td>ours. A</td><td>fter the</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C	under the resistor (with standard con Current ce Change	test sha maxim	Not	applied ple cur 2 hours more t nin ±25 more t	If the racrent) a s, and the than the than 30	ated votated votated to the cape specime initia	oltage 2°C fo acitor s fied va I value the spe	continur 1000 shall me	value	follo	ours. A	fter the	test
7	Load Life Test	pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C Capacitan Dissipation</td><td>under the resistor (with standard con Current ce Change</td><td>test sha maxim</td><td>Not</td><td>applied ple cur 2 hours more t nin ±25 more t</td><td>I the rarent) a s, and t</td><td>ated votated votated to the cape specime initia</td><td>oltage 2°C fo acitor s fied va I value the spe</td><td>continur 1000/shall me</td><td>value</td><td>follo</td><td>ours. A</td><td>fter the</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C Capacitan Dissipation	under the resistor (with standard con Current ce Change	test sha maxim	Not	applied ple cur 2 hours more t nin ±25 more t	I the rarent) a s, and t	ated votated votated to the cape specime initia	oltage 2°C fo acitor s fied va I value the spe	continur 1000/shall me	value	follo	ours. A	fter the	test
	Load Life Test  Shelf Life Test	pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C Capacitan Dissipatior Appearanc ondition&gt; Capacitors turned in s</td><td>under the resistor (with standard con Current ce Change in Factor ce</td><td>test sha maxim adition for</td><td>Not  Not  Not  Not  Not  Not  105±2°</td><td>more to the characteristic and the characteri</td><td>If the rate rent) a strent) a strent han the strent han 30 hanges</td><td>ated von the cap specifie initial own of the shall number of the cap the cap</td><td>oltage 2°C fo acitor s fied va I value the spe ot be fo</td><td>continuer 1000 shall me</td><td>value value  value  00 +4</td><td>e pt sl</td><td>ours. A pwing i</td><td>After the require</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C Capacitan Dissipatior Appearanc ondition> Capacitors turned in s	under the resistor (with standard con Current ce Change in Factor ce	test sha maxim adition for	Not  Not  Not  Not  Not  Not  105±2°	more to the characteristic and the characteri	If the rate rent) a strent) a strent han the strent han 30 hanges	ated von the cap specifie initial own of the shall number of the cap the cap	oltage 2°C fo acitor s fied va I value the spe ot be fo	continuer 1000 shall me	value value  value  00 +4	e pt sl	ours. A pwing i	After the require	test
		pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C Capacitan Dissipatior Appearanc ondition&gt; Capacitors turned in s any doubt a S C 5141,5</td><td>under the resistor (with standard con Current ce Change in Factor ce</td><td>test sha maxim adition for</td><td>Not  Not  Not  Not  Not  Not  105±2°</td><td>more to the characteristic and the characteri</td><td>If the rate rent) a strent) a strent han the strent han 30 hanges</td><td>ated von the cap specifie initial own of the shall number of the cap the cap</td><td>oltage 2°C fo acitor s fied va I value the spe ot be fo</td><td>continuer 1000 shall me</td><td>value value  value  00 +4</td><td>e pt sl</td><td>ours. A pwing i</td><td>After the require</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C Capacitan Dissipatior Appearanc ondition> Capacitors turned in s any doubt a S C 5141,5	under the resistor (with standard con Current ce Change in Factor ce	test sha maxim adition for	Not  Not  Not  Not  Not  Not  105±2°	more to the characteristic and the characteri	If the rate rent) a strent) a strent han the strent han 30 hanges	ated von the cap specifie initial own of the shall number of the cap the cap	oltage 2°C fo acitor s fied va I value the spe ot be fo	continuer 1000 shall me	value value  value  00 +4	e pt sl	ours. A pwing i	After the require	test
		pr re <c< td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C Capacitan Dissipatior Appearanc ondition&gt; Capacitors turned in s ny doubt a S C 5141,s riteria&gt;</td><td>under the sesistor (with standard con Current ce Change in Factor ce shall be standard cor rises on the 5.2.)</td><td>test sha maxim adition for</td><td>Not With Not 105±2° or 1 to ent, the</td><td>more to more t</td><td>I the rarrent) a s, and t than the than 30 nanges</td><td>ated votated to the cape specifie initiates of the cape the cape the cape that the cap</td><td>oltage 2°C fo acitor s fied va I value the spe ot be for pplied pacitor subject</td><td>continuer 1000 shall me ecified vound, e</td><td>value value  value  00 +4</td><td>e pt sl</td><td>ours. A pwing i</td><td>After the require</td><td>test</td></c<>	ondition> Capacitor otective re turned in s riteria> Leakage C Capacitan Dissipatior Appearanc ondition> Capacitors turned in s ny doubt a S C 5141,s riteria>	under the sesistor (with standard con Current ce Change in Factor ce shall be standard cor rises on the 5.2.)	test sha maxim adition for	Not With Not 105±2° or 1 to ent, the	more to more t	I the rarrent) a s, and t than the than 30 nanges	ated votated to the cape specifie initiates of the cape the cape the cape that the cap	oltage 2°C fo acitor s fied va I value the spe ot be for pplied pacitor subject	continuer 1000 shall me ecified vound, e	value value  value  00 +4	e pt sl	ours. A pwing i	After the require	test
		pr re <c c<="" td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C Capacitan Dissipation Appearance ondition&gt; Capacitors turned in s sy doubt a S C 5141, riteria&gt; Leakage C</td><td>under the resistor (with standard concerning to the concerning to</td><td>ored at</td><td>Not Not Not Not Not Not Not Not Not Not</td><td>more to the capacitant of the</td><td>If the rate of the result of the rate of t</td><td>e specified in the cap  Itage a the cap at t</td><td>oltage 2°C fo acitor s fied va I value the spe ot be fo pplied pacitor subject</td><td>continuer 1000 shall me ecified vound, e</td><td>value value  value  00 +4</td><td>e pt sl</td><td>ours. A pwing i</td><td>After the require</td><td>test</td></c>	ondition> Capacitor otective re turned in s riteria> Leakage C Capacitan Dissipation Appearance ondition> Capacitors turned in s sy doubt a S C 5141, riteria> Leakage C	under the resistor (with standard concerning to the concerning to	ored at	Not	more to the capacitant of the	If the rate of the result of the rate of t	e specified in the cap  Itage a the cap at t	oltage 2°C fo acitor s fied va I value the spe ot be fo pplied pacitor subject	continuer 1000 shall me ecified vound, e	value value  value  00 +4	e pt sl	ours. A pwing i	After the require	test
7		pr re <c c<="" td=""><td>ondition&gt; Capacitor otective re turned in s riteria&gt; Leakage C Capacitan Dissipation Appearance ondition&gt; Capacitors turned in s sy doubt a S C 5141, riteria&gt; Leakage C</td><td>under the sesistor (with standard con Current ce Change in Factor ce ses shall be standard corrises on the 5.2.)</td><td>ored at</td><td>Not Not Not Mot Mot Mot Mot Mot Mot Mot Mot Mot M</td><td>more that the capacitation is applied applied</td><td>I the rarrent) a s, and t than the than 30 nanges</td><td>ated vot 105± he cap e specified athe cap hall be pecified nitial variation of the cap hall be pecified nitial</td><td>oltage 2°C fo acitor s fied va I value the spe ot be fo pplied pacitor subject</td><td>continuer 1000 shall me cified vound, e</td><td>value value  value  value  value  volt</td><td>e pt sl</td><td>ours. A pwing i</td><td>After the require</td><td>test</td></c>	ondition> Capacitor otective re turned in s riteria> Leakage C Capacitan Dissipation Appearance ondition> Capacitors turned in s sy doubt a S C 5141, riteria> Leakage C	under the sesistor (with standard con Current ce Change in Factor ce ses shall be standard corrises on the 5.2.)	ored at	Not Not Not Mot Mot Mot Mot Mot Mot Mot Mot Mot M	more that the capacitation is applied	I the rarrent) a s, and t than the than 30 nanges	ated vot 105± he cap e specified athe cap hall be pecified nitial variation of the cap hall be pecified nitial	oltage 2°C fo acitor s fied va I value the spe ot be fo pplied pacitor subject	continuer 1000 shall me cified vound, e	value value  value  value  value  volt	e pt sl	ours. A pwing i	After the require	test

9	Surge Voltage	<condition> Capacitor shall be applied the surge voltage through a <math>(100\pm50)/C_R</math> [k<math>\Omega</math>] resistor in series for <math>30\pm5</math> seconds in every <math>6\pm0.5</math> minutes at 15 to <math>35^{\circ}C</math>. Procedure shall be repeated 1000 times. Then the capacitors shall be left under normal humidity for 1 to 2 hours before measurement. [<math>C_R</math>: Nominal Capacitance (<math>\mu</math>F)]</condition>					
		<criteria></criteria>					
		Leakage Current	Not more than the specified value				
		Capacitance Change	Within ±15% of the initial value				
		Dissipation Factor	Not more than the specified value				
		Appearance	Notable changes shall not be found				
			tage at abnormal situations, and not be hypothesizing that overvoltag				
10	Vibration Test	Fix lead wire at a point no	in 3 AXIS for 2 hours each (total 6 hours) as below. of more than 4mm from the body, use mounting device separately for an and greater or with a length 25mm and longer.  : 10 to 55Hz : 1.5mm : 10 to 55 to 10Hz, In about 1min.				
		Capacitance (During test)	Measured value shall be stable. (The time from one end to the other of the vibration frequency within last 30 minutes at last direction.)				
		Capacitance Change	Within ±5% of the initial value				
		Appearance	Notable changes shall not be found				
11	Solderability	for 5 to 10 seconds and sha and pulled out at the same seconds.	or shall be immersed in flux (ethanol solution of the rosin, 25 wt% rosin all be immersed in the solder bath (235±5°C) and held for 2±0.5 seconds speed.				
12	Resistance to Solder Heat	to 2.0mm from the body of o Then the capacitors shall before measurement.	r shall be immersed into solder bath at 260±5°C for 10±1 seconds up to capacitor. be left under the normal temperature and normal humidity for 1 to 2 ho				
		<criteria></criteria>	Not more than the appointed value				
		Leakage Current	Not more than the specified value				
		Capacitance Change	Within ±10% of the initial value				
		Dissipation Factor	Not more than the specified value				
	I	Appearance	Notable changes shall not be found				

## 13 Resistance to Damp Heat (Steady State)

#### <Condition>

Capacitor shall be stored in the ambient of  $40\pm2^{\circ}C$  and relative humidity 90 to 95% for  $240\pm8$  hours. Then the capacitors shall be left under the normal temperature and normal humidity for 1 to 2 hours before measurement.

#### <Criteria>

Leakage Current	Not more than the specified value
Capacitance Change	Within ±15% of the initial value
Dissipation Factor	Not more than the specified value
Appearance	Notable changes shall not be found

## 14 Maximum Permissible Ripple Current

- (1)The maximum permissible ripple current is the maximum A.C. current at 100kHz and can be applied at maximum operating temperature.
- (2) The combined value of D.C. voltage and the peak A.C. voltage shall not exceed the rated voltage and shall not be reverse voltage.

#### <Frequency Coefficient>

' '				
Frequency(Hz) Capacitance(µF)	120	1k	10k	100k≤
1 to 10	0.42	0.60	0.80	1.00
22 to 33	0.55	0.75	0.90	1.00
47 to 330	0.70	0.85	0.95	1.00


#### < Temperature Coefficient >

Ambient Temperature(°C)	105	85	65≥
Coefficient	1.0	1.7	2.1

- ♦Temperature coefficient shows a limit of ripple current exceeding the rated ripple current that can be passed through a capacitor at each temperature when the life expectancy of a capacitor becomes to be nearly equal with the lifetime at the rated maximum operating temperature.
- ♦ Use of aluminum electrolytic capacitor under ripple voltage with wide amplitude is equivalent to quick charge-discharge operation.

When ripple voltage with the amplitude over 70Vp-p is expected for the products with rated voltage over 100V, please contact us.

#### 9. Diagram of dimensions. : unit mm

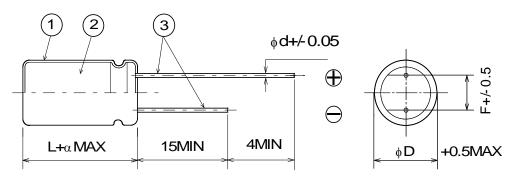

#### ◆Table-2

φD	5	6.3	8		
F	2.0	2.5	3.5		
фd	0.5	0.5	0.6		
α	1.5				

♦Table-3

1	Sleeve	P.E.T.
2	Case	Aluminum
3	Lead Wire	Tin plated

Rubycon
RUBYCON CORPORATION

### ◆Table-4 Standard size, Maximum permissible ripple current and Impedance

Rated voltage 10V					
Nominal	Size	Ripple Current			
capacitance (μF)	φDxL(mm)	(mA r.m.s./105°C,100kHz)			
100	5X11	130			
220	6.3X11	210			
330	8X11.5	330			

Rated voltage 25V		
Nominal	Size	Ripple Current
capacitance (μF)	φDxL(mm)	(mA r.m.s./105°C,100kHz)
33	5X11	130
47	5X11	130
100	6.3X11	210

Rated voltage 50V		
Nominal	Size	Ripple Current
capacitance (μF)	φDxL(mm)	(mA r.m.s./105°C,100kHz)
1	5X11	25
2.2	5X11	35
3.3	5X11	70
4.7	5X11	80
10	5X11	90
22	5X11	135
33	6.3X11	190
47	6.3X11	190
100	8X11.5	270

Rated voltage 100V		
Nominal capacitance (μF)	Size	Ripple Current
	φDxL(mm)	(mA r.m.s./105°C,100kHz)
1	5X11	40
2.2	5X11	50
3.3	5X11	60
4.7	5X11	70
10	6.3X11	150
22	8X11.5	230

Rated voltage 16V		
Nominal	Size	Ripple Current
capacitance (μF)	φDxL(mm)	(mA r.m.s./105°C,100kHz)
47	5X11	130
100	6.3X11	210
220	8X11.5	330

Rated voltage 35V		
Nominal	Size	Ripple Current
capacitance (μF)	φDxL(mm)	(mA r.m.s./105°C,100kHz)
33	5X11	130
47	6.3X11	210
100	8X11.5	330

Rated voltage 63V		
Nominal	Size	Ripple Current
capacitance (μF)	φDxL(mm)	(mA r.m.s./105°C,100kHz)
10	5X11	80
22	6.3X11	170
33	6.3X11	170
47	8X11.5	240


#### •TAPING SPECIFICATION OF RADIAL LEAD TYPE ALUMINUM ELECTROLYTIC CAPACITORS

#### 1.Scope

This specification covers taped radial lead type electrolytic capacitors, with case dia of  $\phi$  5 ~ 6.3 mm.

#### 2.Requirements.

- 2-1. Body tape requirements are shown in 10/9, 10/10 page.
- 2-2. All polarized capacitors must be oriented in one direction.
- 2-3. Leader tape shall be provided before the first capacitor and after the last one on tape at minimum length of 3 feed holes.
- 2-4 Maximum of 3 consecutive missing capacitors are permitted while one pack quantity meets the specification in para.4.
- 2-5. Mounting tape shall be spliced as shown in Fig.1. Mounting tape shall not be over lapped.

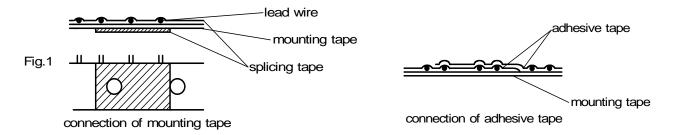


2-6. Defective capacitors shall be pulled out or clipped from the mounting tape.

Remaining protrusion of the leads shall not exceed 2mm from edge of the tape, when clipped.

#### 3. Adhesion test of mounting tape

- 3-1. Adhesive tape on the mounting tape shall not a tear off at the force of less than 3N {0.3kgf} when tested in a manner shown in Fig.2.
- 3-2. Capacitors shall not be pulled out of the tape with a following load applied to the capacitor body in a manner shown in Fig.3.


 $\begin{array}{ll} Dia \leq \varphi & 8mm & 10N \; \{1.0kgf\} \\ Dia \geq \varphi \; 10mm & 5N \; \{0.5kgf\} \end{array}$ 

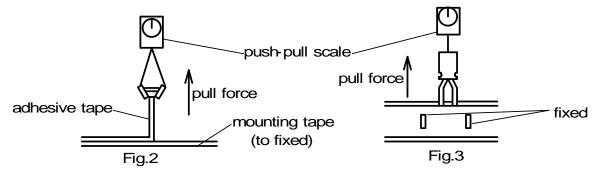

### 4.Package

Taped capacitors shall be packed in a carton shown in Fig.4, with tape ammunition.


Packed cartons shall be marked at least polarity, rated voltage, nominal capacitance and quantity.

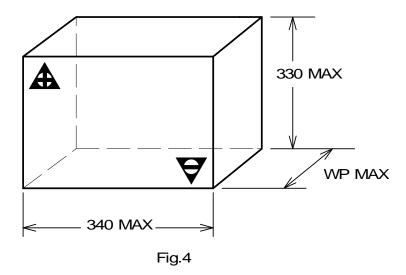


#### STANDARD PACKING QUANTITY

CASE DIA	QUANTITY	WP(mm)
5X11	2000	54
6.3X11	2000	54

CODE : T1 (Positive leading)




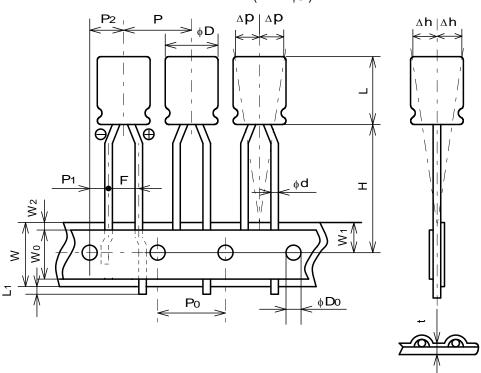

Cymbol	Case Dia ∮ mm	
Symbol	φ5	Remarks
φd	0.5 ±0.05	Dia of lead
L	12.5 MAX	Height of body
Р	12.7 ±1.0	Distance from center to center of body
P <sub>0</sub>	12.7 ±0.2	Distance from center to center of driving hole
P1	5.1 ±0.5	Distance between center of driving hole and lead
P2	6.35 $\pm 1.0$	Distance between center of driving hole and body
F	2.5 +0.8 -0.2	Lead spacing
W	18.0 ±0.3	Width of mounting tape
W <sub>0</sub>	5.0 MIN	Width of adhesive tape
W1	$9.0 \pm 0.5$	Distance between center of driving hole and edge of mounting tape
W2	1.5 MAX	Max. allowable distance between mount and adhesive tape side
Н	18.5 ±0.75	Distance between center of driving hole and bottom of body
L1	0.5 MAX	Protrusion of lead
$\phi D_0$	4.0 ±0.2	Dia. of driving hole
Δh	1.0 MAX	Off alignment of body
∆р	1.0 MAX	Off alignment of body
t	0.6 ±0.3	Sum of thickness for mounting and adhesive tape without lead dia.

CODE : T1 (Positive leading)

LEAD TYPE (DIA.  $\phi 6.3$ )

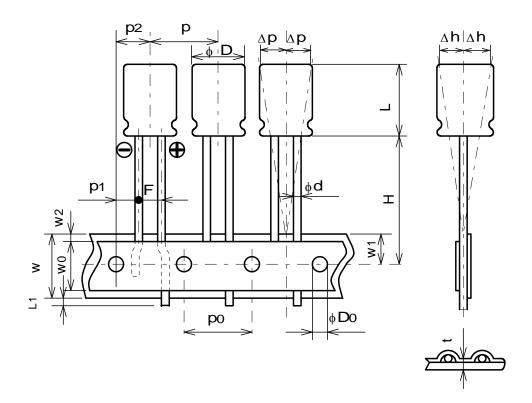

Cumbal	Case Dia ø mm	
Symbol	φ6.3	Remarks
φd	0.5 ±0.05	Dia of lead
L	12.5 MAX	Height of body
Р	12.7 ±1.0	Distance from center to center of body
P <sub>0</sub>	12.7 ±0.2	Distance from center to center of driving hole
P1	5.1 ±0.5	Distance between center of driving hole and lead
P2	6.35 $\pm 1.0$	Distance between center of driving hole and body
F	2.5 +0.8 -0.2	Lead spacing
W	18.0 ±0.3	Width of mounting tape
$W_0$	5.0 MIN	Width of adhesive tape
W1	$9.0 \pm 0.5$	Distance between center of driving hole and edge of mounting tape
W2	1.5 MAX	Max. allowable distance between mount and adhesive tape side
Н	18.5 $\pm 0.75$	Distance between center of driving hole and bottom of body
L1	0.5 MAX	Protrusion of lead
$\phi D_0$	4.0 ±0.2	Dia. of driving hole
Δh	1.0 MAX	Off alignment of body
Δр	1.0 MAX	Off alignment of body
t	0.6 ±0.3	Sum of thickness for mounting and adhesive tape without lead dia.

**Rubycon**RUBYCON CORPORATION