

# BC856ALT1G Series

## General Purpose Transistors

### PNP Silicon

#### Features

- S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise noted)

| Rating  | Symbol           | Value             | Unit |
|---|------------------|-------------------|------|
| Collector-Emitter Voltage<br>BC856, SBC856<br>BC857, SBC857<br>BC858, NSVBC858, BC859 | V <sub>CEO</sub> | -65<br>-45<br>-30 | V    |
| Collector-Base Voltage<br>BC856, SBC856<br>BC857, SBC857<br>BC858, NSVBC858, BC859    | V <sub>CBO</sub> | -80<br>-50<br>-30 | V    |
| Emitter-Base Voltage  | V <sub>EBO</sub> | -5.0              | V    |
| Collector Current – Continuous  | I <sub>C</sub>   | -100              | mAdc |
| Collector Current – Peak  | I <sub>C</sub>   | -200              | mAdc |

#### THERMAL CHARACTERISTICS

| Characteristic   | Symbol                            | Max         | Unit        |
|--|-----------------------------------|-------------|-------------|
| Total Device Dissipation FR-5 Board,<br>(Note 1) T <sub>A</sub> = 25°C<br>Derate above 25°C        | P <sub>D</sub>                    | 225<br>1.8  | mW<br>mW/°C |
| Thermal Resistance,<br>Junction-to-Ambient   | R <sub>θJA</sub>                  | 556         | °C/W        |
| Total Device Dissipation Alumina<br>Substrate, (Note 2) T <sub>A</sub> = 25°C<br>Derate above 25°C | P <sub>D</sub>                    | 300<br>2.4  | mW<br>mW/°C |
| Thermal Resistance,<br>Junction-to-Ambient   | R <sub>θJA</sub>                  | 417         | °C/W        |
| Junction and Storage Temperature   | T <sub>J</sub> , T <sub>stg</sub> | -55 to +150 | °C          |



Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. FR-5 = 1.0 x 0.75 x 0.062 in.
2. Alumina = 0.4 x 0.3 x 0.024 in 99.5% alumina.



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)



SOT-23 (TO-236)  
CASE 318  
STYLE 6

#### MARKING DIAGRAM



- xx = Device Code  
xx = (Refer to page 6)
- M = Date Code\*
- = Pb-Free Package

(Note: Microdot may be in either location)  
\*Date Code orientation and/or overbar may vary depending upon manufacturing location.

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 6 of this data sheet.

## BC856ALT1G Series

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

| Characteristic  | Symbol   | Min           | Typ                  | Max         | Unit                |
|---|--|---------------|----------------------|-------------|---------------------|
| <b>OFF CHARACTERISTICS</b>  |  |               |                      |             |                     |
| Collector–Emitter Breakdown Voltage<br>( $I_C = -10\text{ mA}$ )  | BC856, SBC856 Series<br>BC857, SBC857 Series<br>BC858, NSVBC858 BC859 Series                   | $V_{(BR)CEO}$ | -65<br>-45<br>-30    | -<br>-<br>- | V                   |
| Collector–Emitter Breakdown Voltage<br>( $I_C = -10\ \mu\text{A}$ , $V_{EB} = 0$ )                              | BC856 S, SBC856series<br>BC857A, SBC857A, BC857B, SBC857B Only<br>BC858, NSVB858, BC859 Series | $V_{(BR)CES}$ | -80<br>-50<br>-30    | -<br>-<br>- | V                   |
| Collector–Base Breakdown Voltage<br>( $I_C = -10\ \mu\text{A}$ )  | BC856, SBC856 Series<br>BC857, SBC857 Series<br>BC858, NSVBC858, BC859 Series                  | $V_{(BR)CBO}$ | -80<br>-50<br>-30    | -<br>-<br>- | V                   |
| Emitter–Base Breakdown Voltage<br>( $I_E = -1.0\ \mu\text{A}$ )   | BC856, SBC856 Series<br>BC857, SBC857 Series<br>BC858, NSVBC858, BC859 Series                  | $V_{(BR)EBO}$ | -5.0<br>-5.0<br>-5.0 | -<br>-<br>- | V                   |
| Collector Cutoff Current ( $V_{CB} = -30\text{ V}$ )<br>( $V_{CB} = -30\text{ V}$ , $T_A = 150^\circ\text{C}$ ) |  | $I_{CBO}$     | -<br>-               | -<br>-      | nA<br>$\mu\text{A}$ |

### ON CHARACTERISTICS

|   |   |               |                   |                   |                   |   |
|---|---|---------------|-------------------|-------------------|-------------------|---|
| DC Current Gain<br>( $I_C = -10\ \mu\text{A}$ , $V_{CE} = -5.0\text{ V}$ )  | BC856A, SBC856A, BC857A, SBC857A, BC858A<br>BC856B, SBC856B, BC857B, SBC857B,<br>BC858B, NSVBC858B<br>BC857C, SBC857C BC858C                        | $h_{FE}$      | -<br>-<br>-       | 90<br>150<br>270  | -<br>-<br>-       | - |
| ( $I_C = -2.0\text{ mA}$ , $V_{CE} = -5.0\text{ V}$ )   | BC856A, SBC856A, BC857A,<br>SBC857A, BC858A<br>BC856B, SBC856B, BC857B, SBC857B,<br>BC858B,<br>NSVBC858B, BC859B<br>BC857C, SBC857C, BC858C, BC859C |               | 125<br>220<br>420 | 180<br>290<br>520 | 250<br>475<br>800 |   |
| Collector–Emitter Saturation Voltage<br>( $I_C = -10\text{ mA}$ , $I_B = -0.5\text{ mA}$ )<br>( $I_C = -100\text{ mA}$ , $I_B = -5.0\text{ mA}$ ) |   | $V_{CE(sat)}$ | -<br>-            | -<br>-            | -0.3<br>-0.65     | V |
| Base–Emitter Saturation Voltage<br>( $I_C = -10\text{ mA}$ , $I_B = -0.5\text{ mA}$ )<br>( $I_C = -100\text{ mA}$ , $I_B = -5.0\text{ mA}$ )      |   | $V_{BE(sat)}$ | -<br>-            | -0.7<br>-0.9      | -<br>-            | V |
| Base–Emitter On Voltage<br>( $I_C = -2.0\text{ mA}$ , $V_{CE} = -5.0\text{ V}$ )<br>( $I_C = -10\text{ mA}$ , $V_{CE} = -5.0\text{ V}$ )          |   | $V_{BE(on)}$  | -0.6<br>-         | -<br>-            | -0.75<br>-0.82    | V |

### SMALL–SIGNAL CHARACTERISTICS

|  |  |          |        |        |           |     |
|--|--|----------|--------|--------|-----------|-----|
| Current–Gain – Bandwidth Product<br>( $I_C = -10\text{ mA}$ , $V_{CE} = -5.0\text{ Vdc}$ , $f = 100\text{ MHz}$ )  |  | $f_T$    | 100    | -      | -         | MHz |
| Output Capacitance<br>( $V_{CB} = -10\text{ V}$ , $f = 1.0\text{ MHz}$ )   |  | $C_{ob}$ | -      | -      | 4.5       | pF  |
| Noise Figure<br>( $I_C = -0.2\text{ mA}$ , $V_{CE} = -5.0\text{ Vdc}$ , $R_S = 2.0\text{ k}\Omega$ , $f = 1.0\text{ kHz}$ , $BW = 200\text{ Hz}$ )<br>BC856, SBC856, BC857, SBC857, BC858, NSVBC858 Series<br>BC859 Series |  | NF       | -<br>- | -<br>- | 10<br>4.0 | dB  |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

# BC856ALT1G Series

## BC857/BC858/BC859/SBC857/NSVBC858

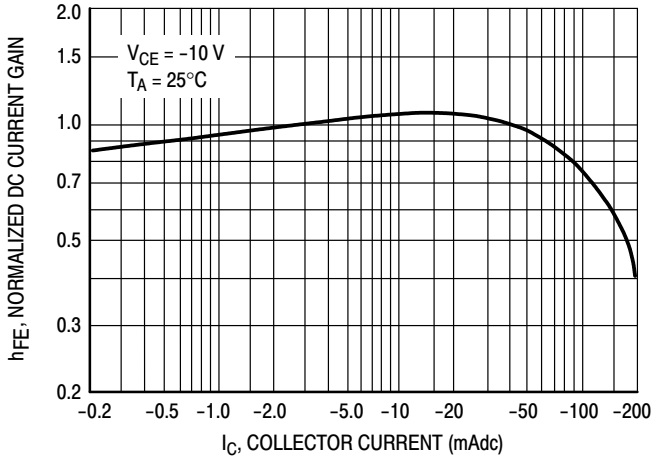


Figure 1. Normalized DC Current Gain

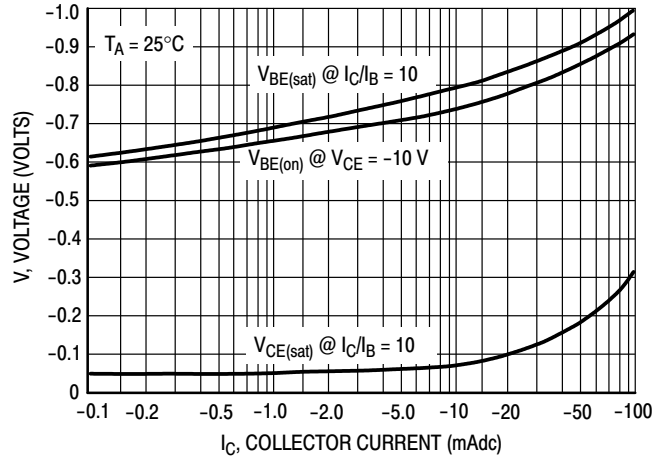


Figure 2. "Saturation" and "On" Voltages

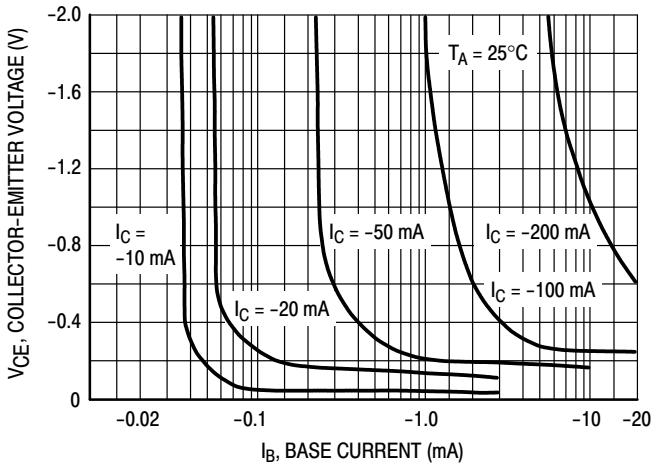


Figure 3. Collector Saturation Region

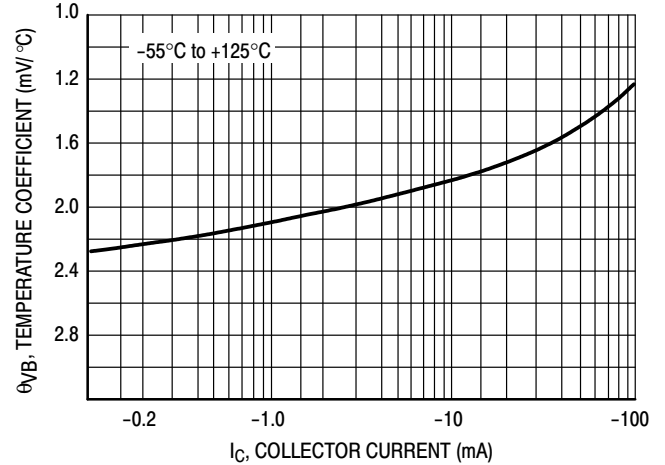


Figure 4. Base-Emitter Temperature Coefficient

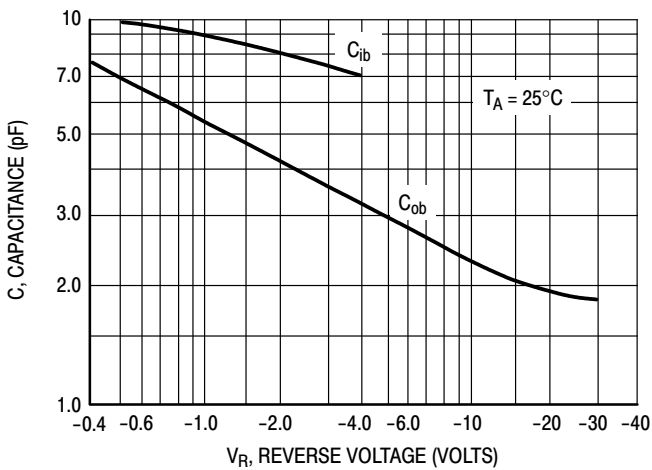


Figure 5. Capacitances

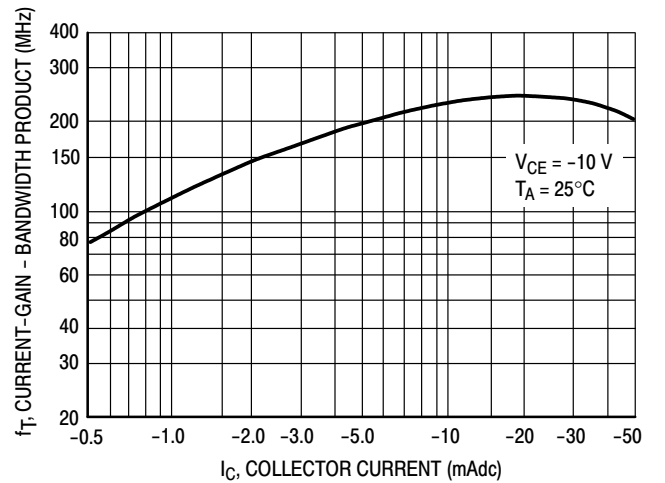


Figure 6. Current-Gain - Bandwidth Product

# BC856ALT1G Series

## BC856/SBC856

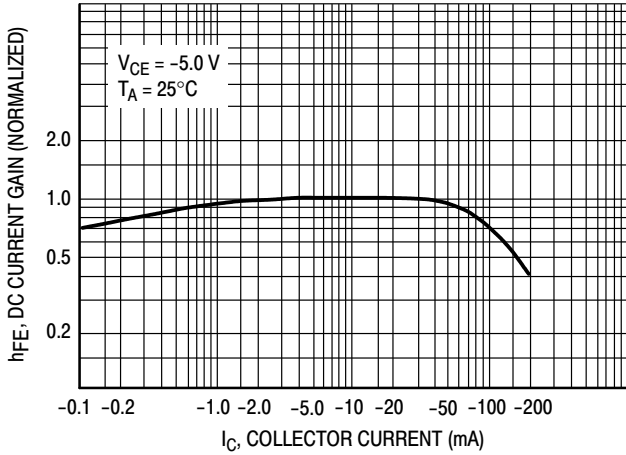


Figure 7. DC Current Gain

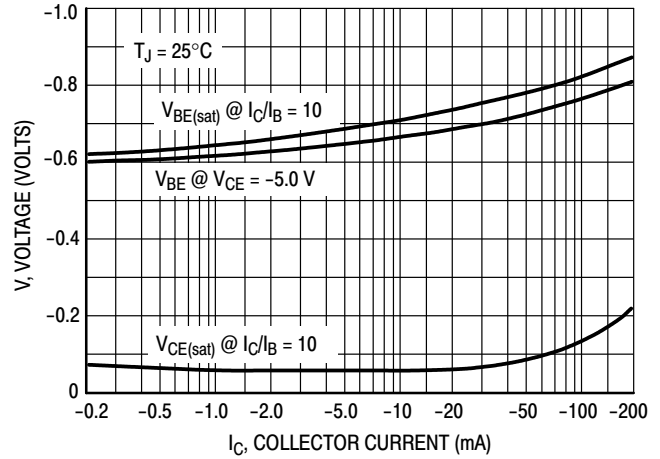


Figure 8. "On" Voltage

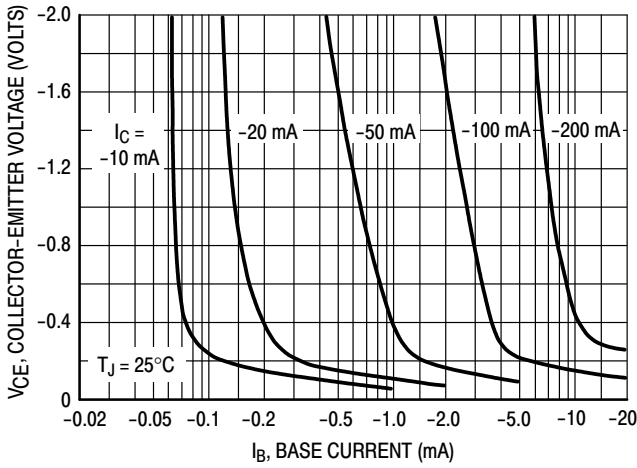


Figure 9. Collector Saturation Region

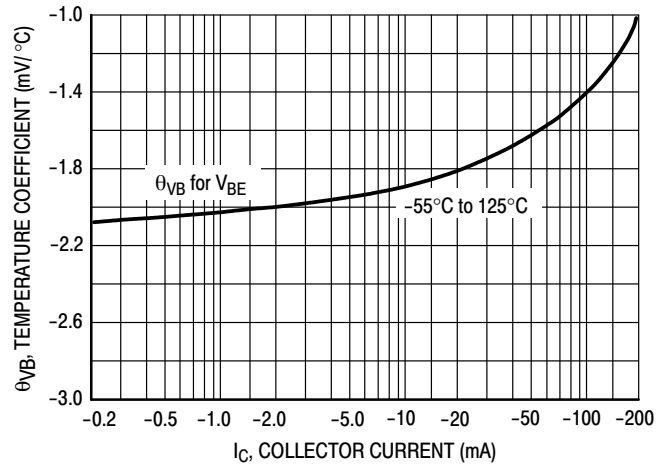


Figure 10. Base-Emitter Temperature Coefficient

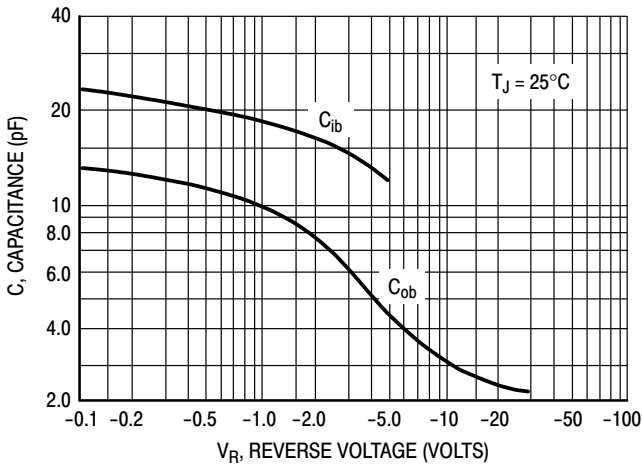


Figure 11. Capacitance

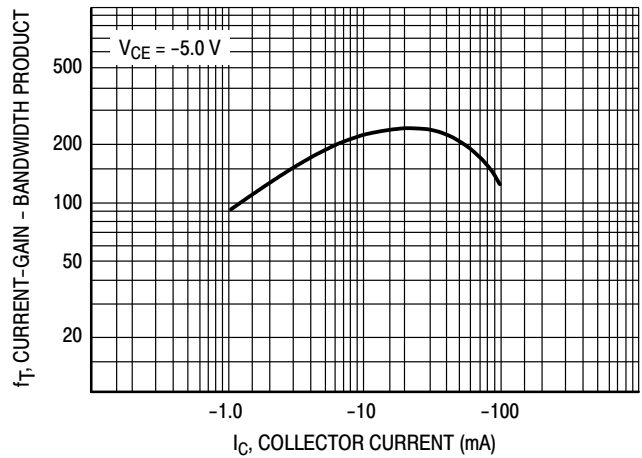


Figure 12. Current-Gain - Bandwidth Product

# BC856ALT1G Series

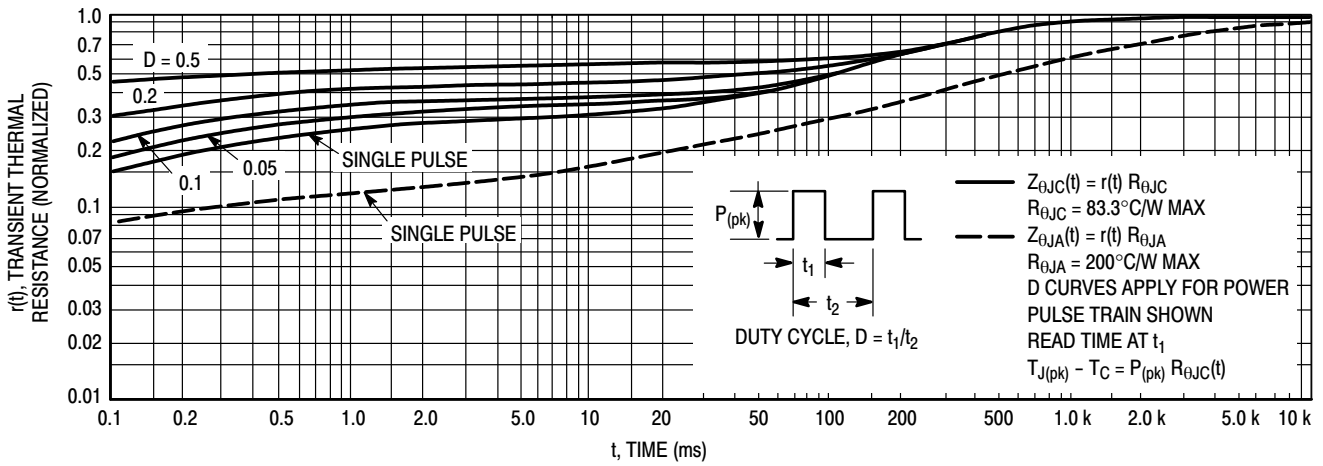


Figure 13. Thermal Response

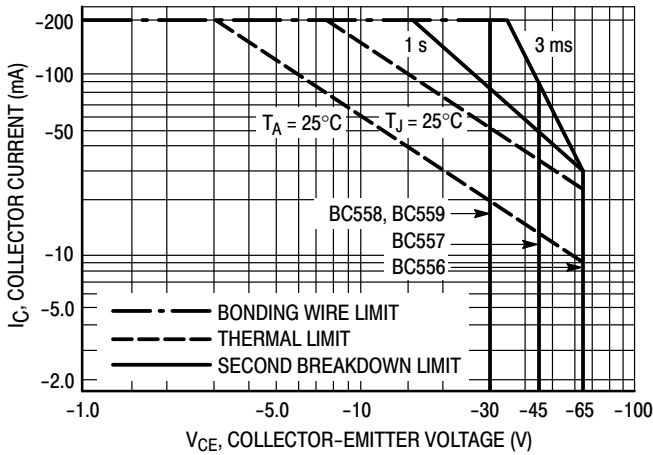


Figure 14. Active Region Safe Operating Area

The safe operating area curves indicate  $I_C$ - $V_{CE}$  limits of the transistor that must be observed for reliable operation. Collector load lines for specific circuits must fall below the limits indicated by the applicable curve.

The data of Figure 14 is based upon  $T_{J(pk)} = 150^\circ\text{C}$ ;  $T_C$  or  $T_A$  is variable depending upon conditions. Pulse curves are valid for duty cycles to 10% provided  $T_{J(pk)} \leq 150^\circ\text{C}$ .  $T_{J(pk)}$  may be calculated from the data in Figure 13. At high case or ambient temperatures, thermal limitations will reduce the power that can be handled to values less than the limitations imposed by the secondary breakdown.

## BC856ALT1G Series

### ORDERING INFORMATION

| Device         | Marking | Package             | Shipping†            |
|----------------|---------|---------------------|----------------------|
| BC856ALT1G     | 3A      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC856ALT1G*   |         |                     |                      |
| BC856ALT3G     |         |                     | 10,000 / Tape & Reel |
| BC856BLT1G     | 3B      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC856BLT1G*   |         |                     |                      |
| BC856BLT3G     |         |                     | 10,000 / Tape & Reel |
| SBC856BLT3G*   |         |                     |                      |
| BC857ALT1G     | 3E      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC857ALT1G*   |         |                     |                      |
| BC857BLT1G     | 3F      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC857BLT1G*   |         |                     |                      |
| BC857BLT3G     |         |                     | 10,000 / Tape & Reel |
| NSVBC857BLT3G* |         |                     |                      |
| BC857CLT1G     | 3G      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| SBC857CLT1G*   |         |                     |                      |
| BC857CLT3G     |         |                     | 10,000 / Tape & Reel |
| BC858ALT1G     | 3J      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| BC858BLT1G     | 3K      | SOT-23<br>(Pb-Free) |                      |
| NSVBC858BLT1G* |         |                     |                      |
| BC858BLT3G     | 3L      | SOT-23<br>(Pb-Free) | 10,000 / Tape & Reel |
| BC858CLT1G     |         | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| BC858CLT3G     |         | SOT-23<br>(Pb-Free) | 10,000 / Tape & Reel |
|                |         |                     |                      |
| BC859BLT1G     | 4B      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| BC859BLT3G     |         | SOT-23<br>(Pb-Free) | 10,000 / Tape & Reel |
| BC859CLT1G     | 4C      | SOT-23<br>(Pb-Free) | 3,000 / Tape & Reel  |
| BC859CLT3G     |         | SOT-23<br>(Pb-Free) | 10,000 / Tape & Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*S and NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable.

# MECHANICAL CASE OUTLINE

## PACKAGE DIMENSIONS

ON Semiconductor®



### SOT-23 (TO-236) CASE 318-08 ISSUE AS

DATE 30 JAN 2018

SCALE 4:1



NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

| DIM | MILLIMETERS |      |      | INCHES |       |       |
|-----|-------------|------|------|--------|-------|-------|
|     | MIN         | NOM  | MAX  | MIN    | NOM   | MAX   |
| A   | 0.89        | 1.00 | 1.11 | 0.035  | 0.039 | 0.044 |
| A1  | 0.01        | 0.06 | 0.10 | 0.000  | 0.002 | 0.004 |
| b   | 0.37        | 0.44 | 0.50 | 0.015  | 0.017 | 0.020 |
| c   | 0.08        | 0.14 | 0.20 | 0.003  | 0.006 | 0.008 |
| D   | 2.80        | 2.90 | 3.04 | 0.110  | 0.114 | 0.120 |
| E   | 1.20        | 1.30 | 1.40 | 0.047  | 0.051 | 0.055 |
| e   | 1.78        | 1.90 | 2.04 | 0.070  | 0.075 | 0.080 |
| L   | 0.30        | 0.43 | 0.55 | 0.012  | 0.017 | 0.022 |
| L1  | 0.35        | 0.54 | 0.69 | 0.014  | 0.021 | 0.027 |
| HE  | 2.10        | 2.40 | 2.64 | 0.083  | 0.094 | 0.104 |
| T   | 0°          | ---  | 10°  | 0°     | ---   | 10°   |

### RECOMMENDED SOLDERING FOOTPRINT



### GENERIC MARKING DIAGRAM\*



XXX = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present.

STYLE 1 THRU 5:  
CANCELLED

STYLE 6:  
PIN 1. BASE  
2. EMITTER  
3. COLLECTOR

STYLE 7:  
PIN 1. EMITTER  
2. BASE  
3. COLLECTOR

STYLE 8:  
PIN 1. ANODE  
2. NO CONNECTION  
3. CATHODE

STYLE 9:  
PIN 1. ANODE  
2. ANODE  
3. CATHODE

STYLE 10:  
PIN 1. DRAIN  
2. SOURCE  
3. GATE

STYLE 11:  
PIN 1. ANODE  
2. CATHODE  
3. CATHODE-ANODE

STYLE 12:  
PIN 1. CATHODE  
2. CATHODE  
3. ANODE

STYLE 13:  
PIN 1. SOURCE  
2. DRAIN  
3. GATE

STYLE 14:  
PIN 1. CATHODE  
2. GATE  
3. ANODE

STYLE 15:  
PIN 1. GATE  
2. CATHODE  
3. ANODE

STYLE 16:  
PIN 1. ANODE  
2. CATHODE  
3. CATHODE

STYLE 17:  
PIN 1. NO CONNECTION  
2. ANODE  
3. CATHODE

STYLE 18:  
PIN 1. NO CONNECTION  
2. CATHODE  
3. ANODE

STYLE 19:  
PIN 1. CATHODE  
2. ANODE  
3. CATHODE-ANODE

STYLE 20:  
PIN 1. CATHODE  
2. ANODE  
3. GATE

STYLE 21:  
PIN 1. GATE  
2. SOURCE  
3. DRAIN

STYLE 22:  
PIN 1. RETURN  
2. OUTPUT  
3. INPUT

STYLE 23:  
PIN 1. ANODE  
2. ANODE  
3. CATHODE

STYLE 24:  
PIN 1. GATE  
2. DRAIN  
3. SOURCE

STYLE 25:  
PIN 1. ANODE  
2. CATHODE  
3. GATE

STYLE 26:  
PIN 1. CATHODE  
2. ANODE  
3. NO CONNECTION

STYLE 27:  
PIN 1. CATHODE  
2. CATHODE  
3. CATHODE

STYLE 28:  
PIN 1. ANODE  
2. ANODE  
3. ANODE

|                         |                        |  |
|-------------------------|------------------------|--|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42226B</b>     | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-23 (TO-236)</b> | <b>PAGE 1 OF 1</b>   |

ON Semiconductor and ON are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Email Requests to: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

### TECHNICAL SUPPORT

North American Technical Support:  
Voice Mail: 1 800-282-9855 Toll Free USA/Canada  
Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative