Features

- Input Voltage Range : 1.2V to 5.5V
- 20µA Ground Current (I_Q) at no Load
- PSRR = 75dB at 1kHz
- 1.5% Output Accuracy
- Low (0.1µA) Shutdown Current
- Dropout Voltage : 0.17V at 300mA when $V_{OUT} \geq 3V$
- Support Fixed Output Voltage 0.8V, 1.0V, 1.05V, 1.1V, 1.2V, 1.25V, 1.3V, 1.5V, 1.8V, 1.85V, 2V, 2.5V, 2.8V, 2.85V, 3V, 3.1V, 3.3V, 3.45V
- Current Limit Protection
- Over Temperature Protection
- Output Active Discharge Function
- SOT23-5 Packages

Applications

- CDM/GSM mobile phone
- PDAs /MP3
- Audio/Video equipment

General Description

This production is a low-dropout (LDO) voltage regulator with enable function that operates from a 1.2V to 5.5V supply. It provides up to 300mA of output current in miniaturized packaging.

The feature of 20µA low quiescent current and 0.5µA shutdown current are ideal for the battery application with long service life. The other features include current limit function, over temperature protection and output discharge function.

Ordering Information

TPTLV70012DDCR

Package Type
DDCR=SOT23-5

Output Voltage: 33=3.3V
30=3.0V
28=2.8V
18=1.8V
xx.xV

Package informantion

SOT23-5

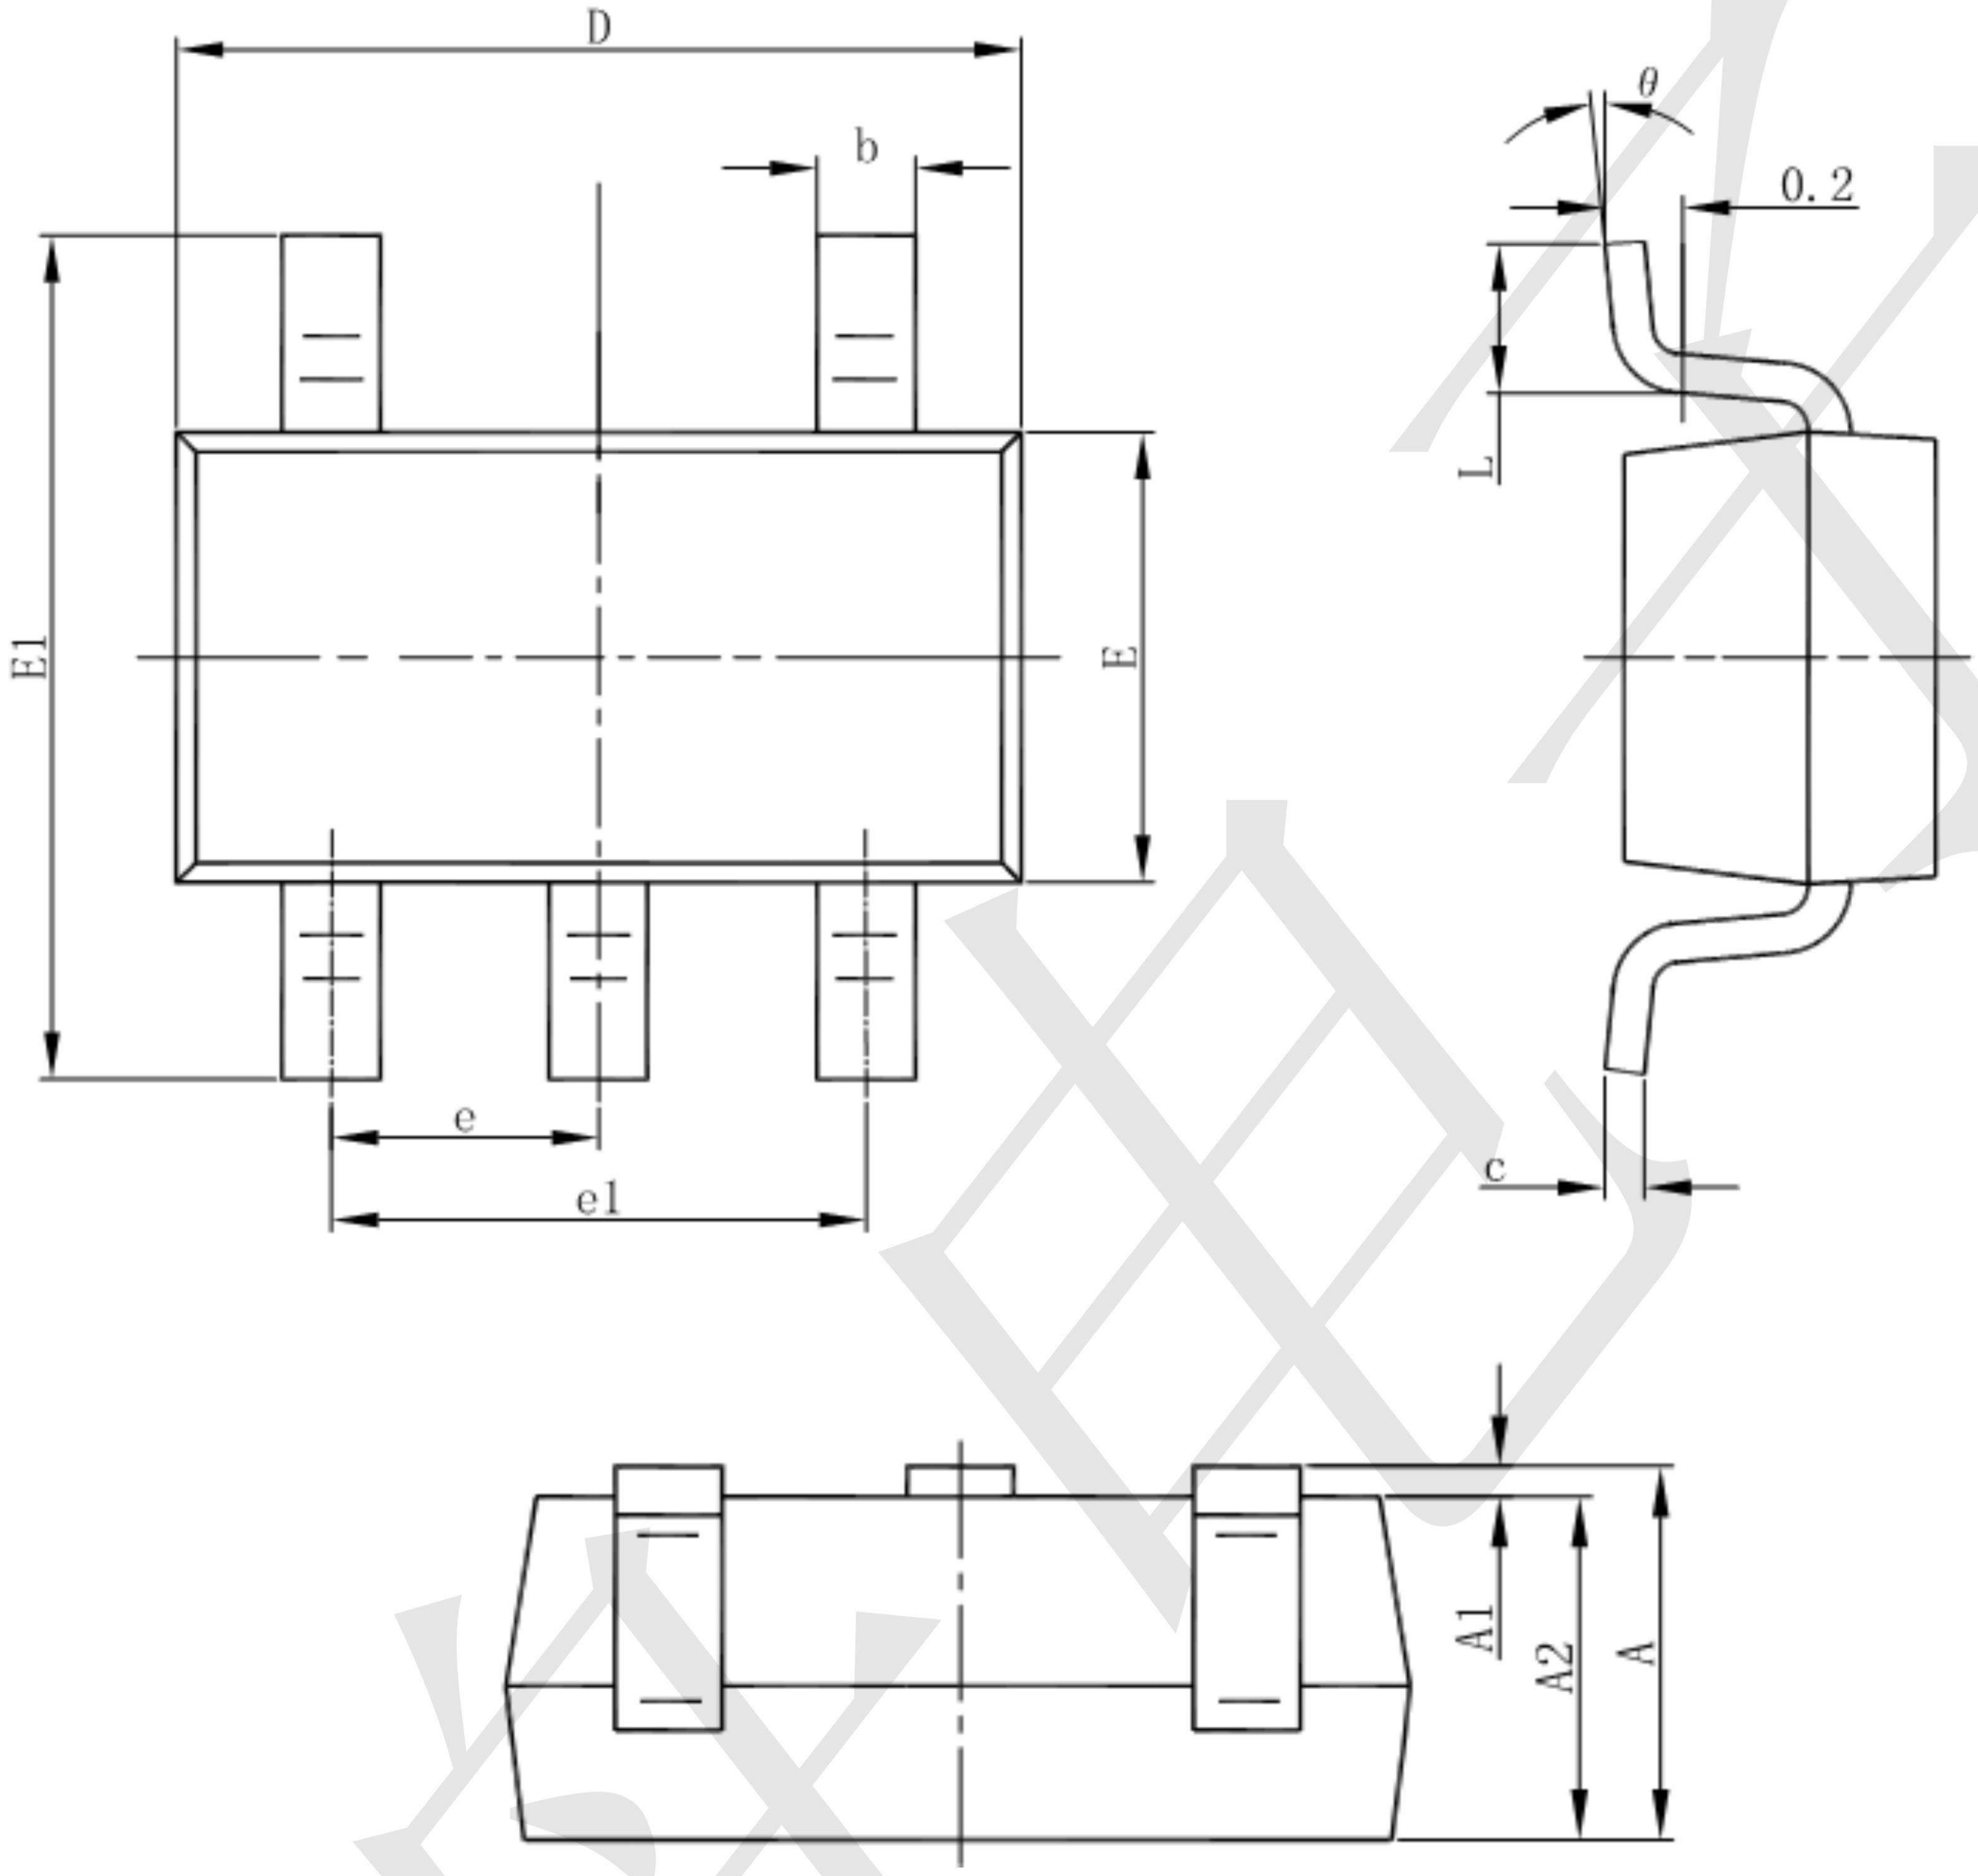

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

Pin Configuration

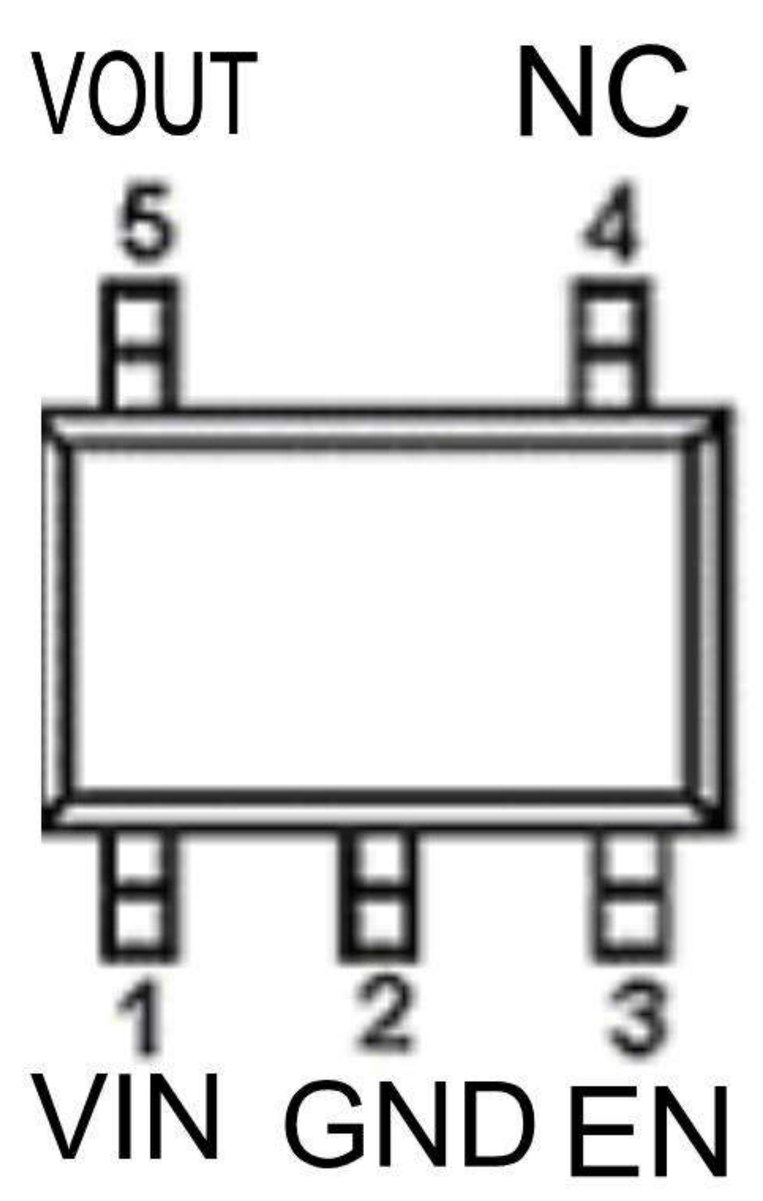

SOT23-5

Pin No	Pin Name	Pin Function
1	VIN	Input of Supply Voltage.
2	GND	Ground
3	EN	Enable Control Input.
4	NC	No Internal Connection.
5	VOUT	Output of the Regulator

BLOCK DIAGRAM

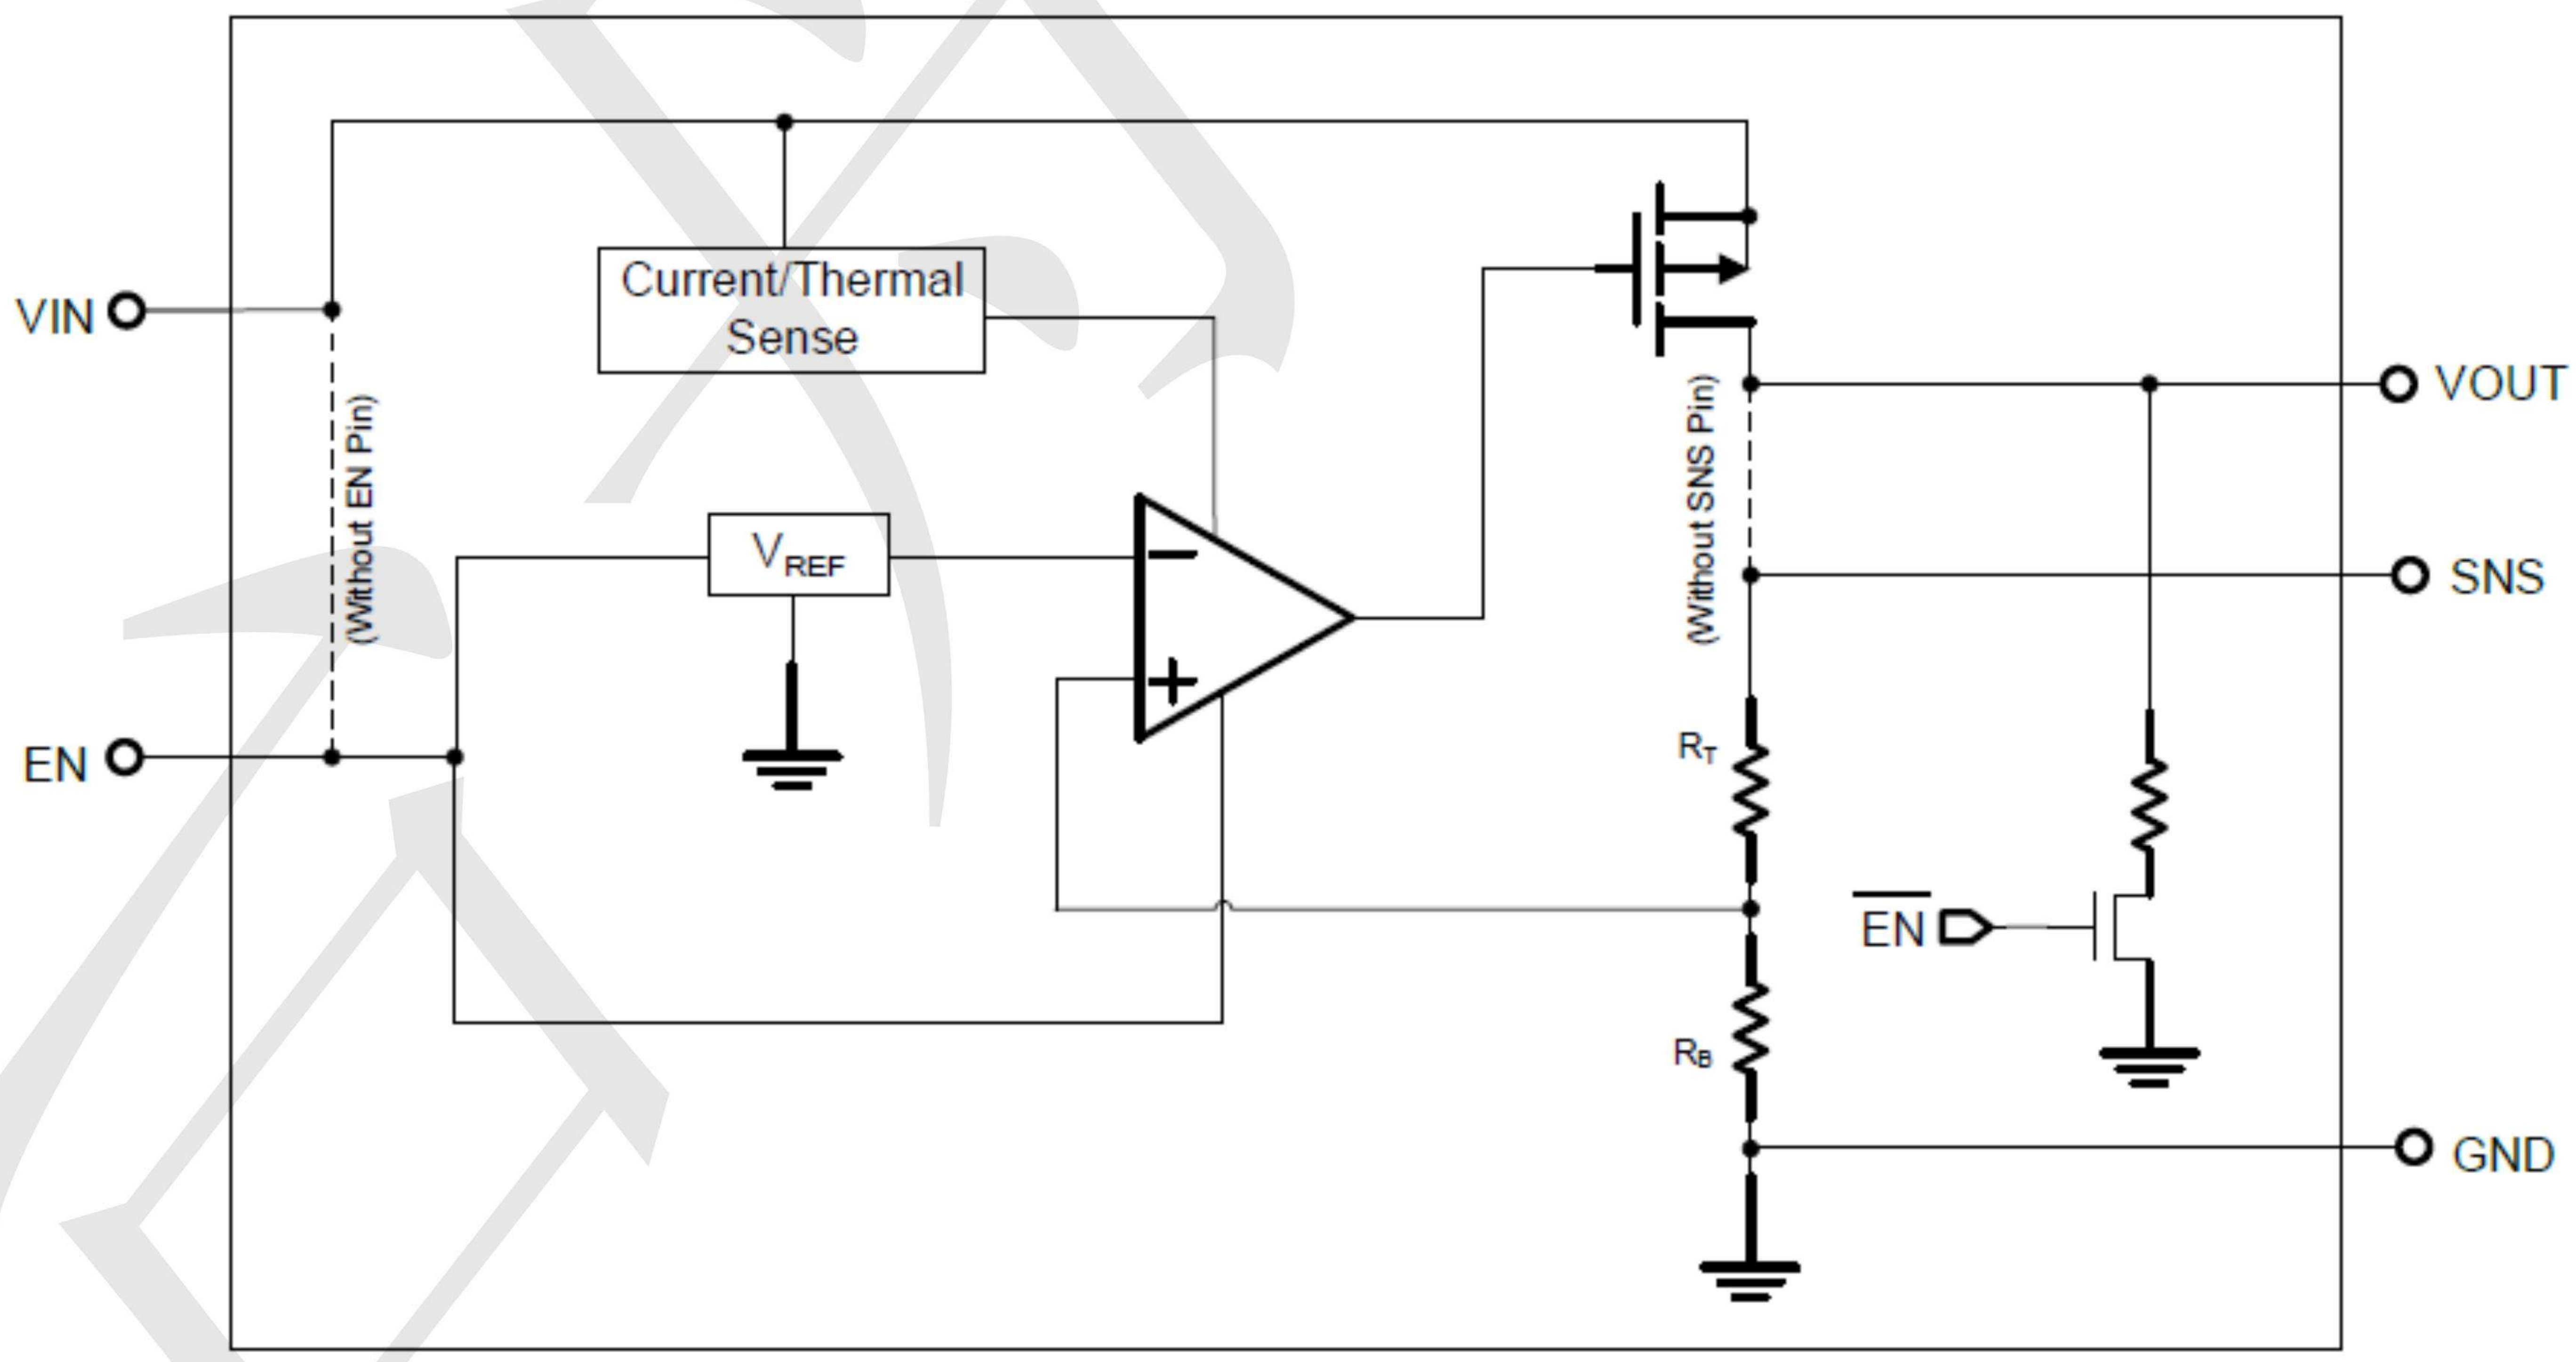

ABSOLUTE MAXIMUM RATINGS

VIN Pin to GND Pin Voltage .... -0.3V to 6.5V

VOUT Pin and EN Pin to GND Pin Voltage .... -0.3V to 6V

VOUT Pin to VIN Pin Voltage .... -6V to 0.3V

Storage Temperature Range .... -60ºC~150ºC

Lead Temperature (Soldering, 10 sec) 260ºC

Junction Temperature 150ºC

Operating Ambient Temperature Range T_A .... -40ºC~85ºC

Thermal Resistance Junction to Case, $R\theta_{JC}$ SOT23-5 .... 115°C/W

Thermal Resistance Junction to Ambient, $R\theta_{JA}$ SOT23-5 .... 250°C/W

Electrical Characteristics (T =25°C unless otherwise noted)

(V_{OUT} + 1 < V_{IN} < 5.5V, T_A = 25°C, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Fixed Output Voltage Range	V_{OUT}		0.8	--	3.45	V
DC Output Accuracy		I_{LOAD} = 1mA	-2	--	2	%
Dropout Voltage (I_{LOAD} = 300mA) (Note 5)	V_{DROP}	0.8V ≤ V_{OUT} < 1.05V	--	0.7	0.97	V
		1.05V ≤ V_{OUT} < 1.2V	--	0.5	0.92	
		1.2V ≤ V_{OUT} < 1.5V	--	0.4	0.57	
		1.5V ≤ V_{OUT} < 1.8V	--	0.3	0.47	
		1.8V ≤ V_{OUT} < 2.1V	--	0.24	0.33	
		2.1V ≤ V_{OUT} < 2.5V	--	0.21	0.3	
		2.5V ≤ V_{OUT} < 2.8V	--	0.18	0.25	
		2.8V ≤ V_{OUT} < 3V	--	0.16	0.23	
		3V ≤ V_{OUT}	--	0.15	0.2	
Dropout Voltage (I_{LOAD} = 200mA) (Note 6)	V_{DROP}	1.8V ≤ V_{OUT} < 2.1V	--	0.16	0.2	V
V_{CC} Consumption Current	I_Q	I_{LOAD} = 0mA, V_{OUT} ≤ 5.5V V_{IN} ≥ V_{OUT} + V_{DROP}	--	20		μA

Parameter		Symbol	Test Conditions		Min	Typ	Max	Unit
Shutdown GND Current (Note 7)			V_{EN} = 0V		--	0.1	0.5	μA
Shutdown Leakage Current (Note 7)			V_{EN} = 0V, V_{OUT} = 0V		--	0.1	0.5	μA
EN Input Current		I_{EN}	V_{EN} = 5.5V		--	--	0.1	μA
Line Regulation		ΔLINE	I_{LOAD} = 1mA	1.2V ≤ V_{IN} < 1.5V	--	0.3	0.6	%
				1.5V ≤ V_{IN} < 1.8V	--	0.15	0.3	
				1.8V ≤ V_{IN} ≤ 5.5V	--	0.13	0.35	
Load Regulation		ΔLOAD	1mA < I_{LOAD} < 300mA		--	0.5	1	%
Power Supply Rejection Ratio		PSRR	V_{IN} = 3V, I_{LOAD} = 50mA, C_{OUT} = 1μF, V_{OUT} = 2.5V, f = 1kHz		--	75	--	dB
Output Voltage Noise			C_{OUT} = 1μF, I_{LOAD} = 150mA, BW = 10Hz to 100kHz, V_{IN} = V_{OUT} + 1V	V_{OUT} = 0.8V	--	38	--	μV_{RMS}
				V_{OUT} = 1.2V	--	46	--	
				V_{OUT} = 1.8V	--	48	--	
				V_{OUT} = 3.3V	--	51	--	
Output Current Limit		I_{LIM}	V_{OUT} = 90% of $V_{OUT(NOM)}$		350	600	--	mA
Enable Threshold Voltage	H-Level	V_{ENH}	V_{IN} = 5V		0.5	0.7	0.9	V
	L-Level	V_{ENL}	V_{IN} = 5V		0.4	0.65	0.85	
Thermal Shutdown Temperature		T_{SD}	I_{LOAD} = 30mA, V_{IN} ≥ 1.5V		--	150	--	°C
Thermal Shutdown Hysteresis		ΔT_{SD}			--	20	--	°C
Discharge Resistance			EN = 0V, V_{OUT} = 0.1V		--	80	--	Ω

TYPICAL APPLICATION

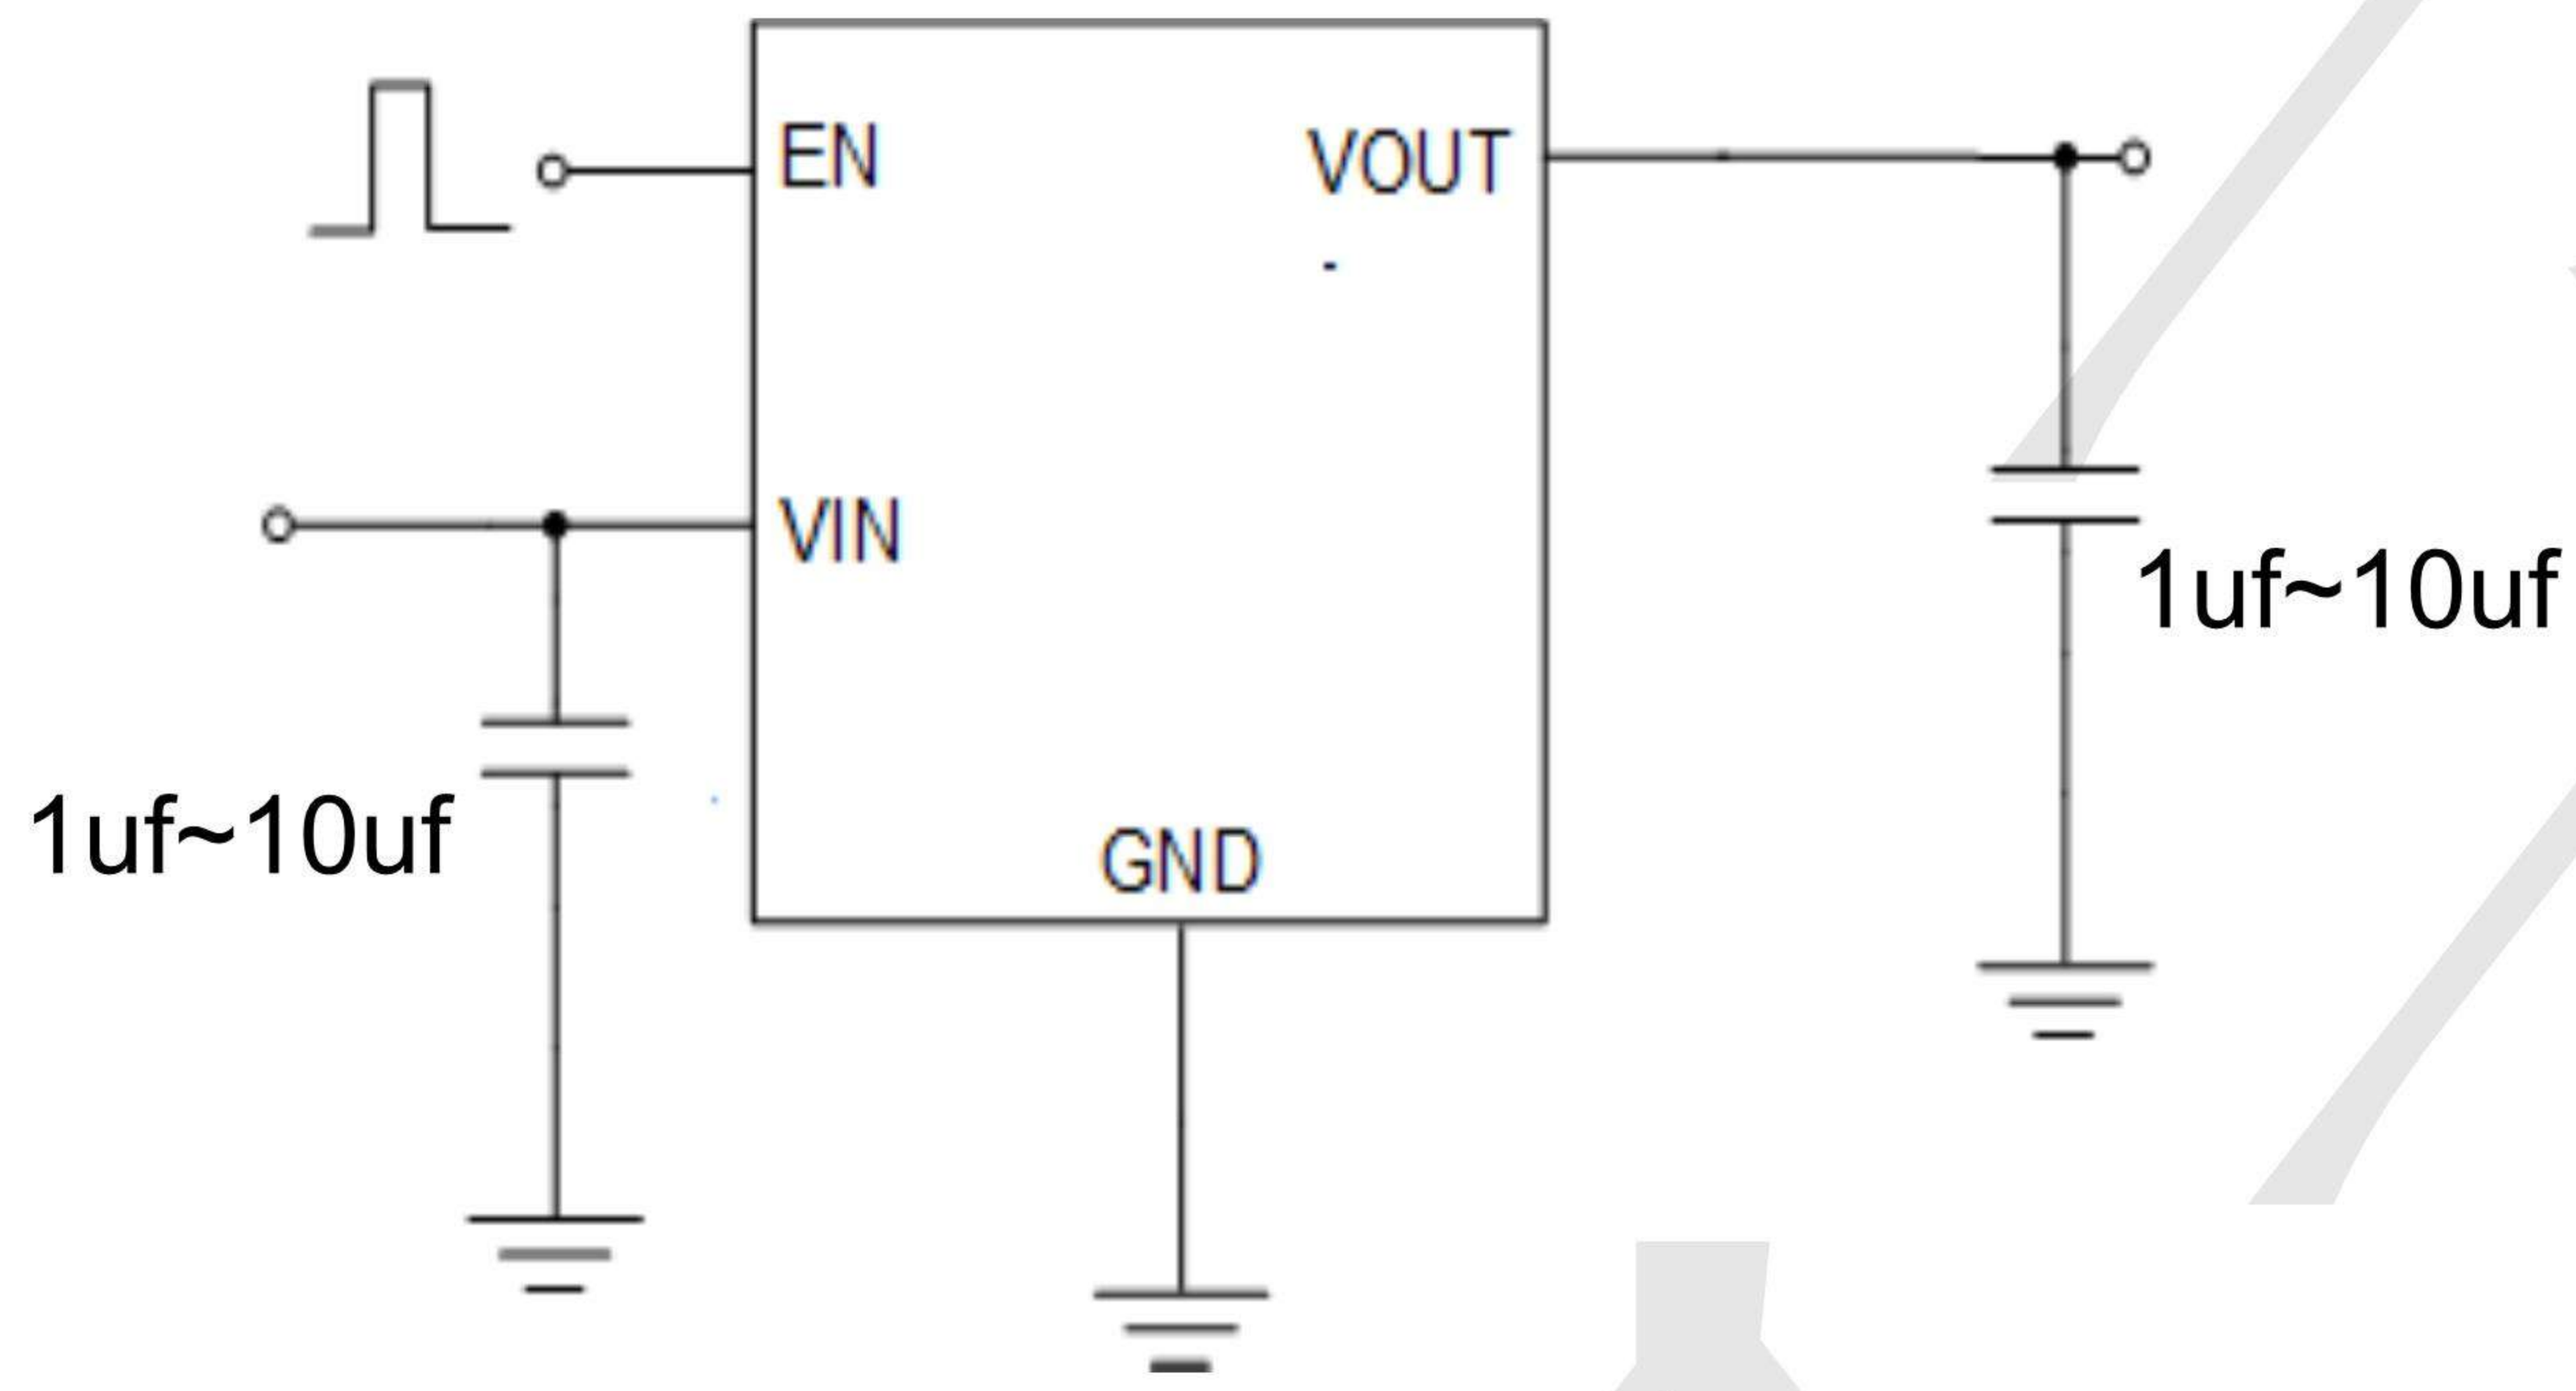

Figure 2: Application circuit of Fixed V_{OUT} LDO with enable function

Typical Operating Characteristics

Output Voltage vs. Temperature

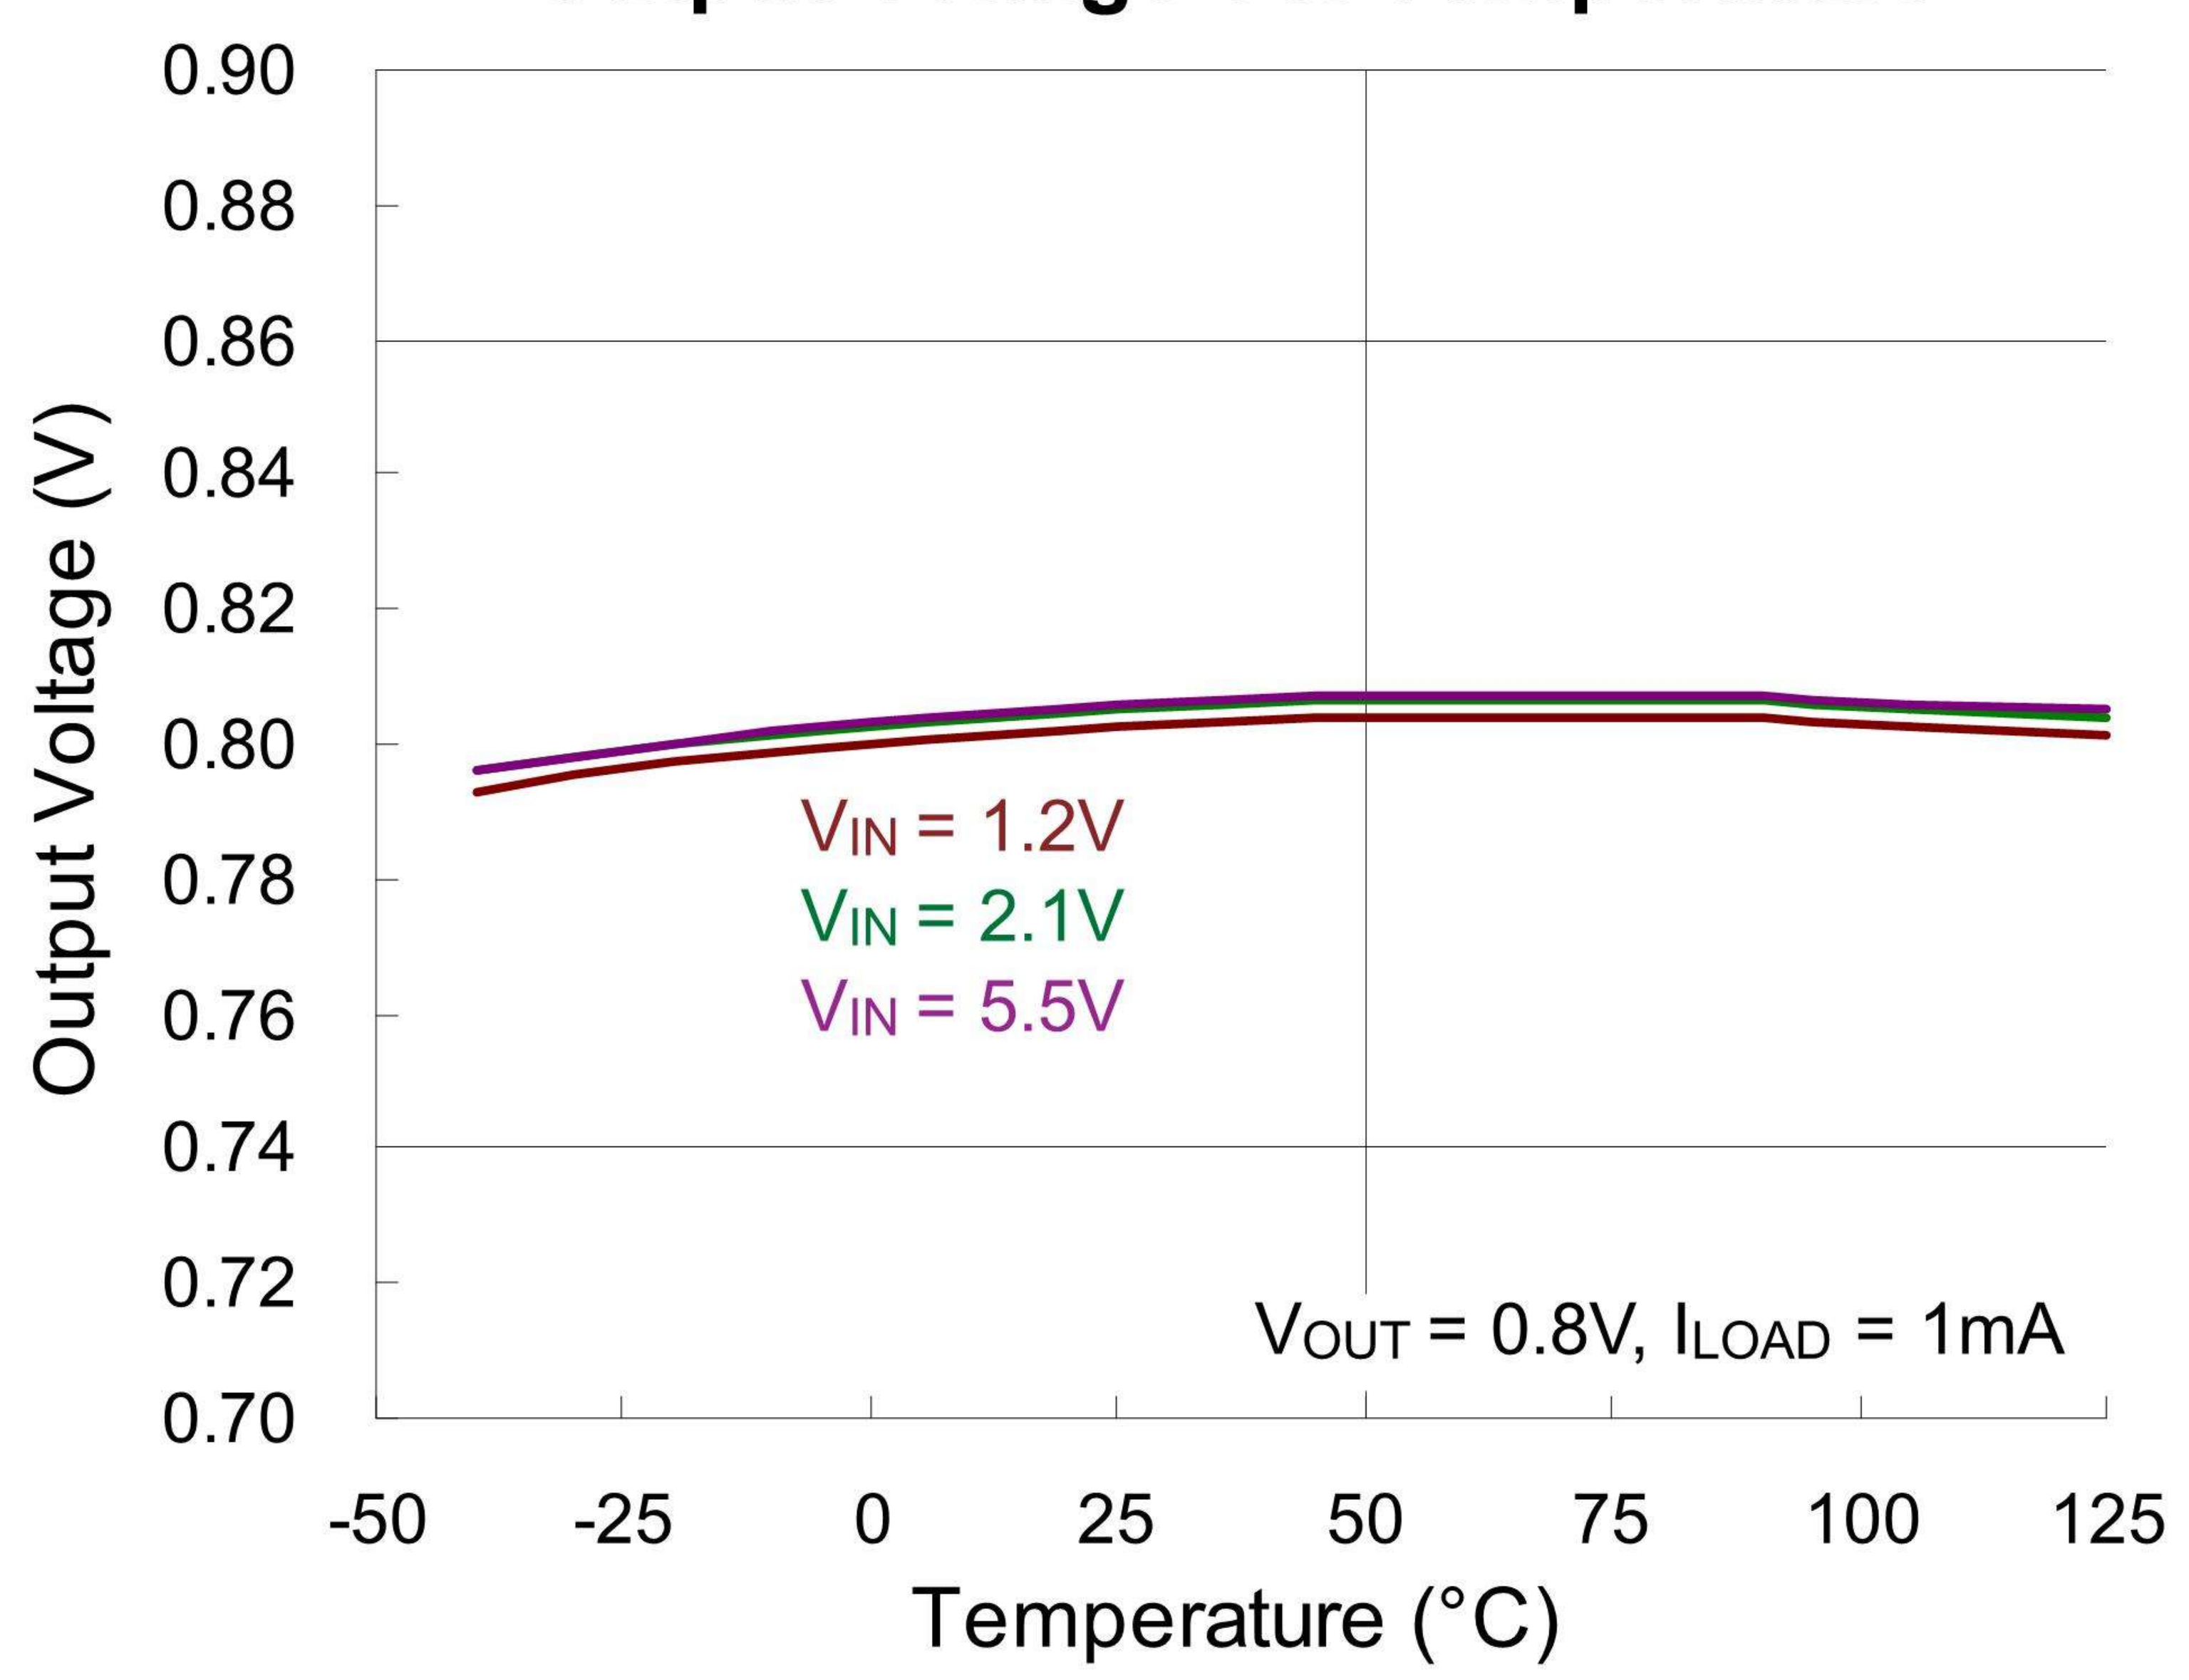

Output Voltage vs. Temperature

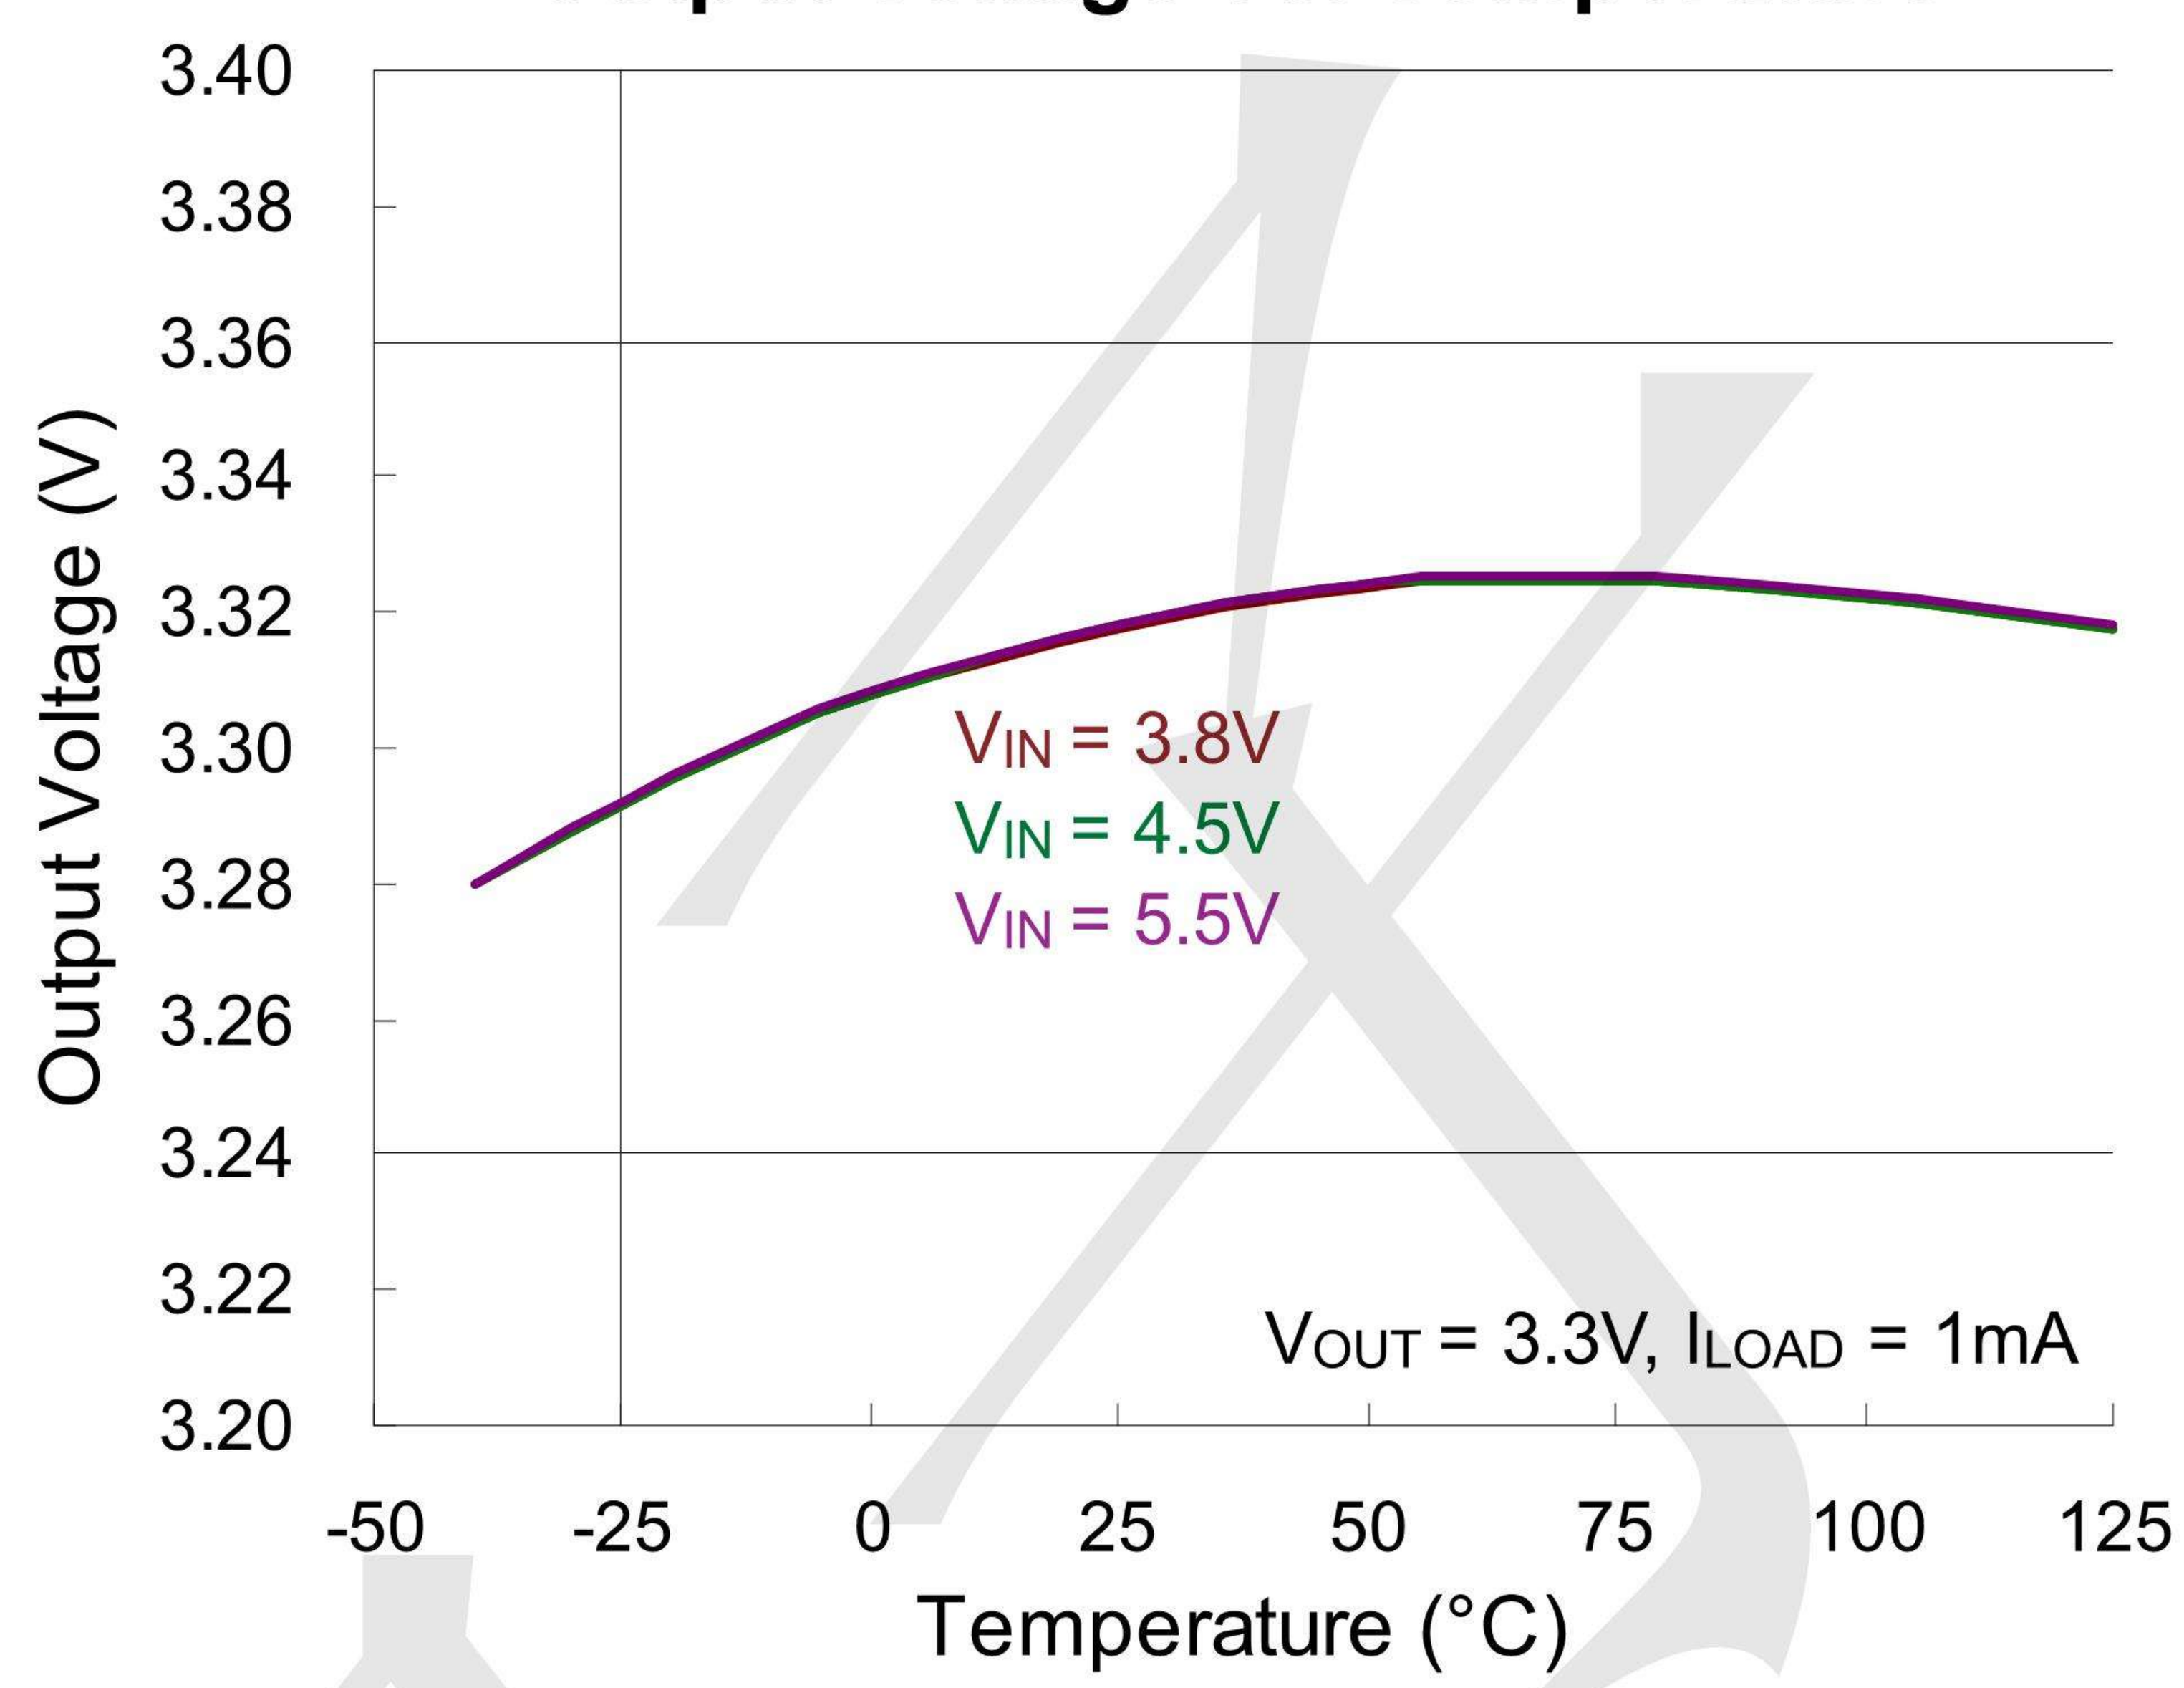

Output Voltage vs. Input Voltage

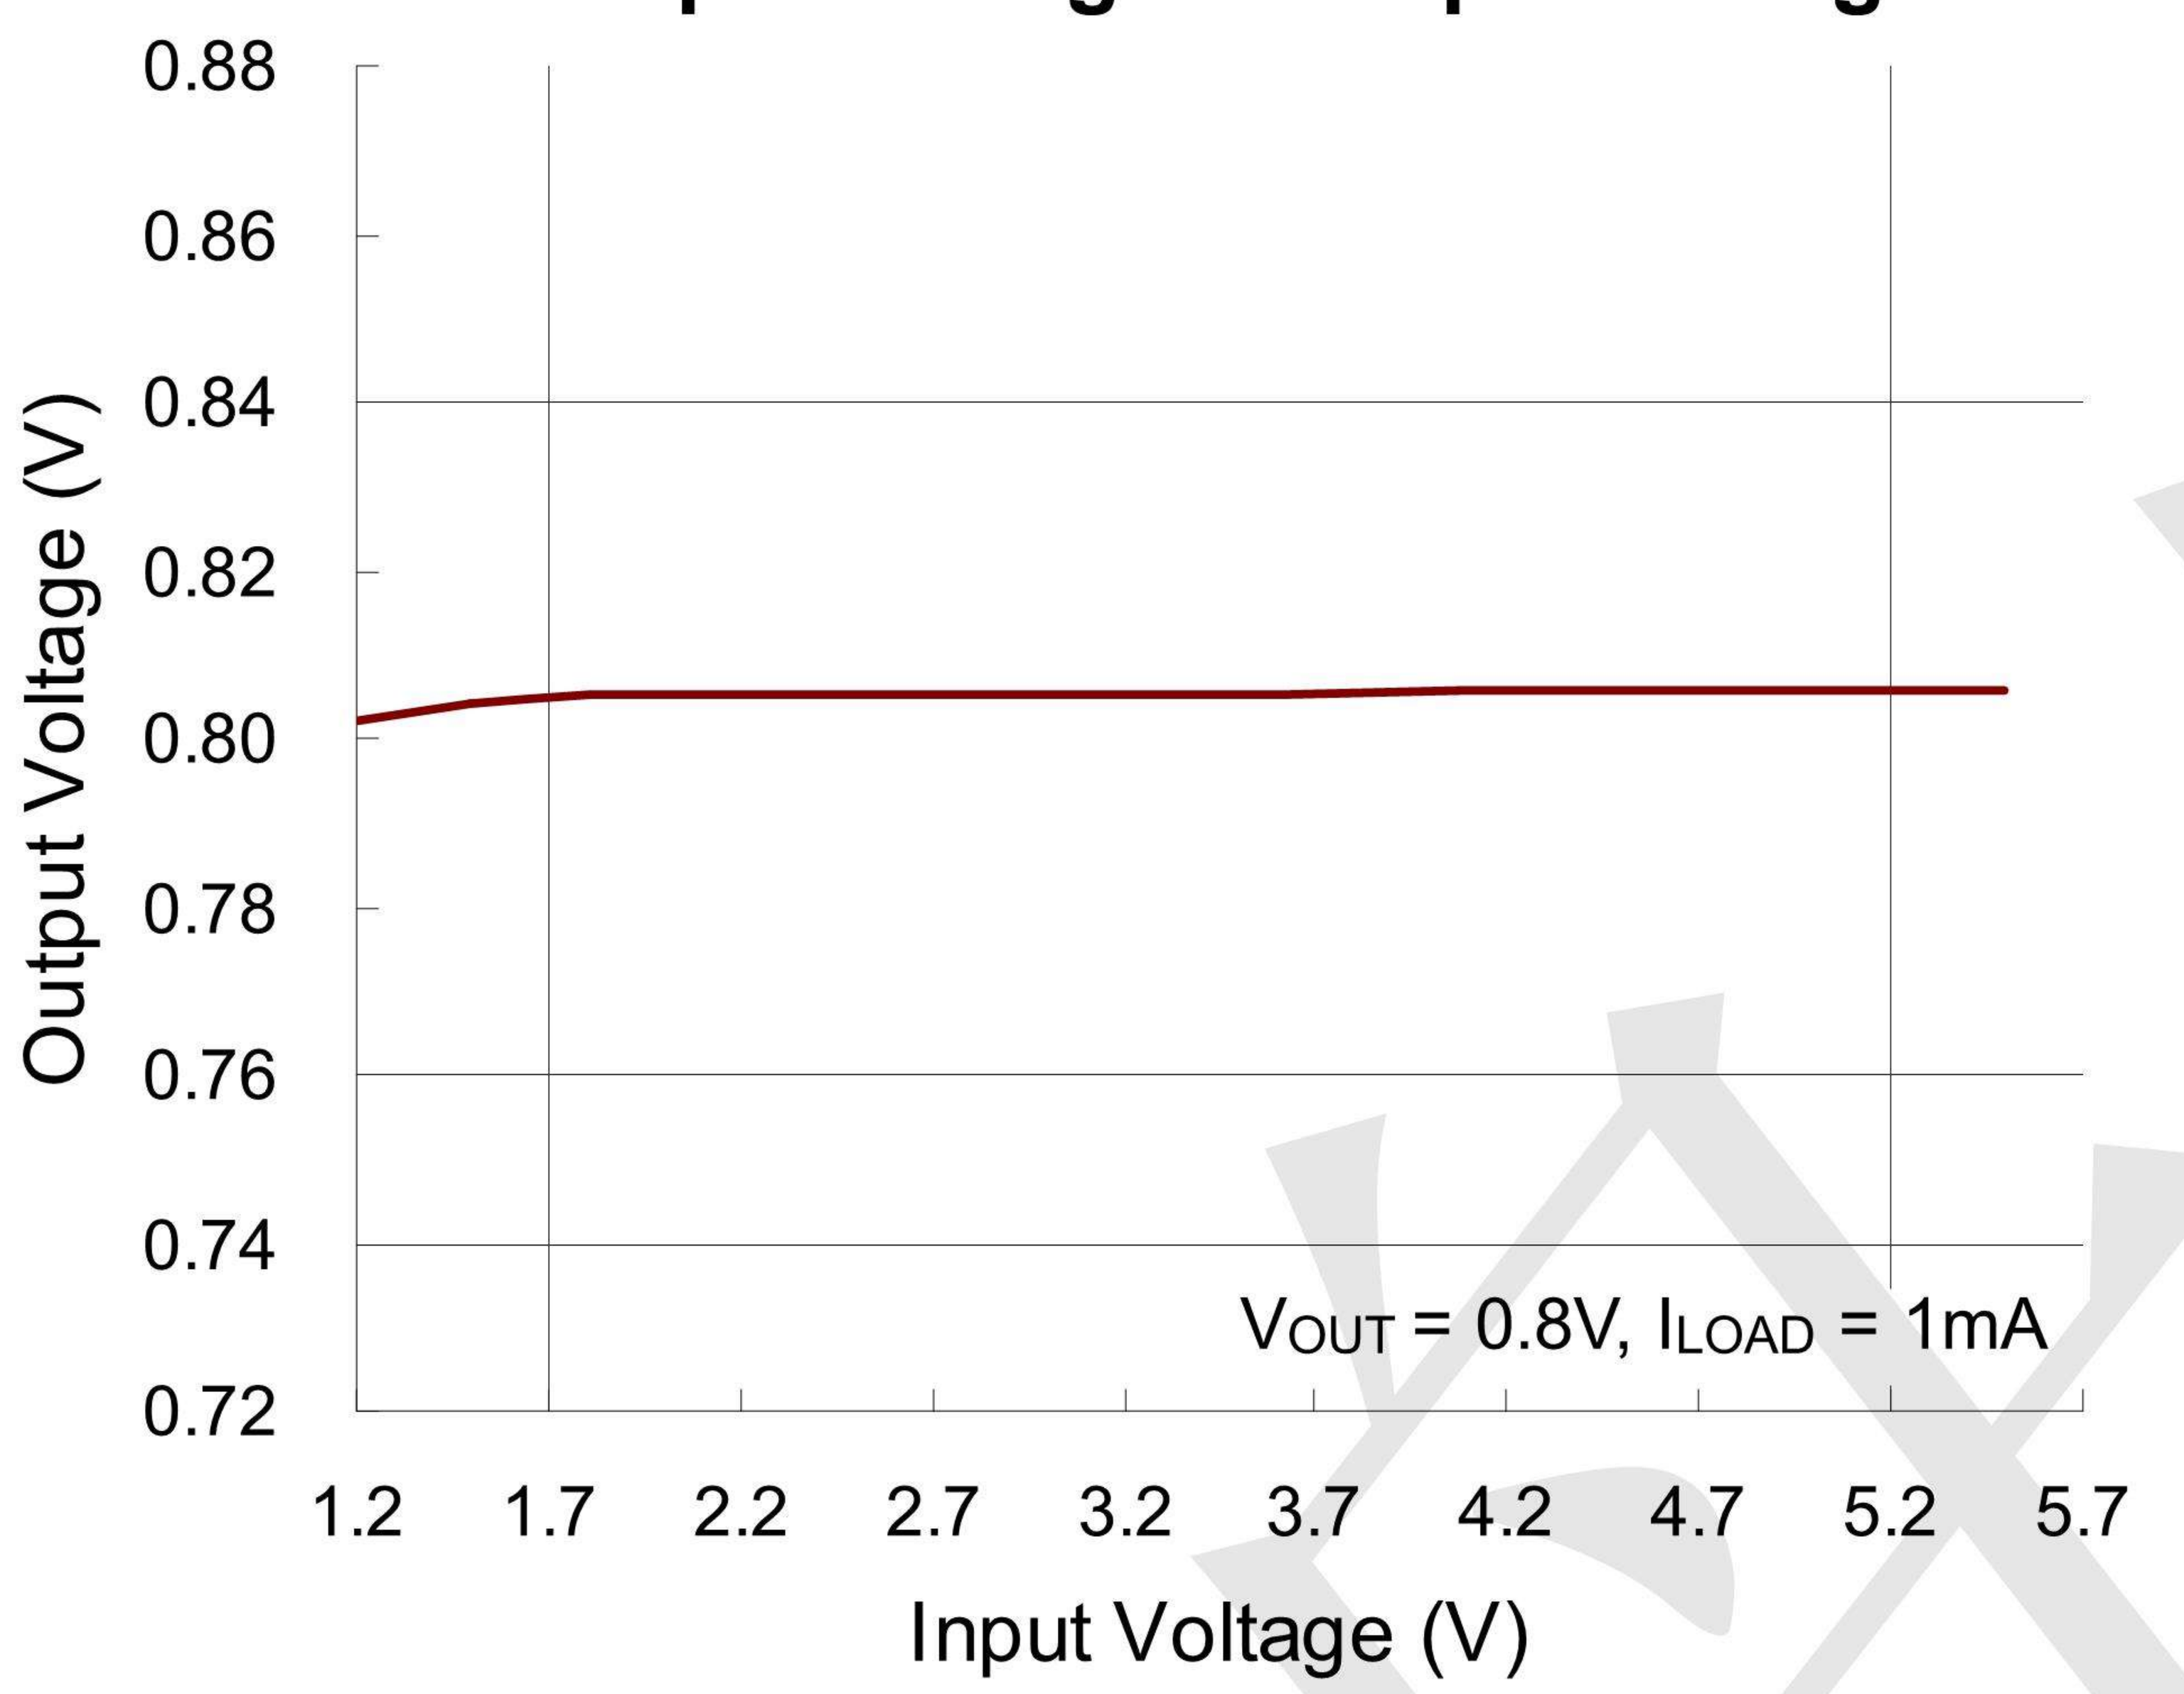

Output Voltage vs. Load Current

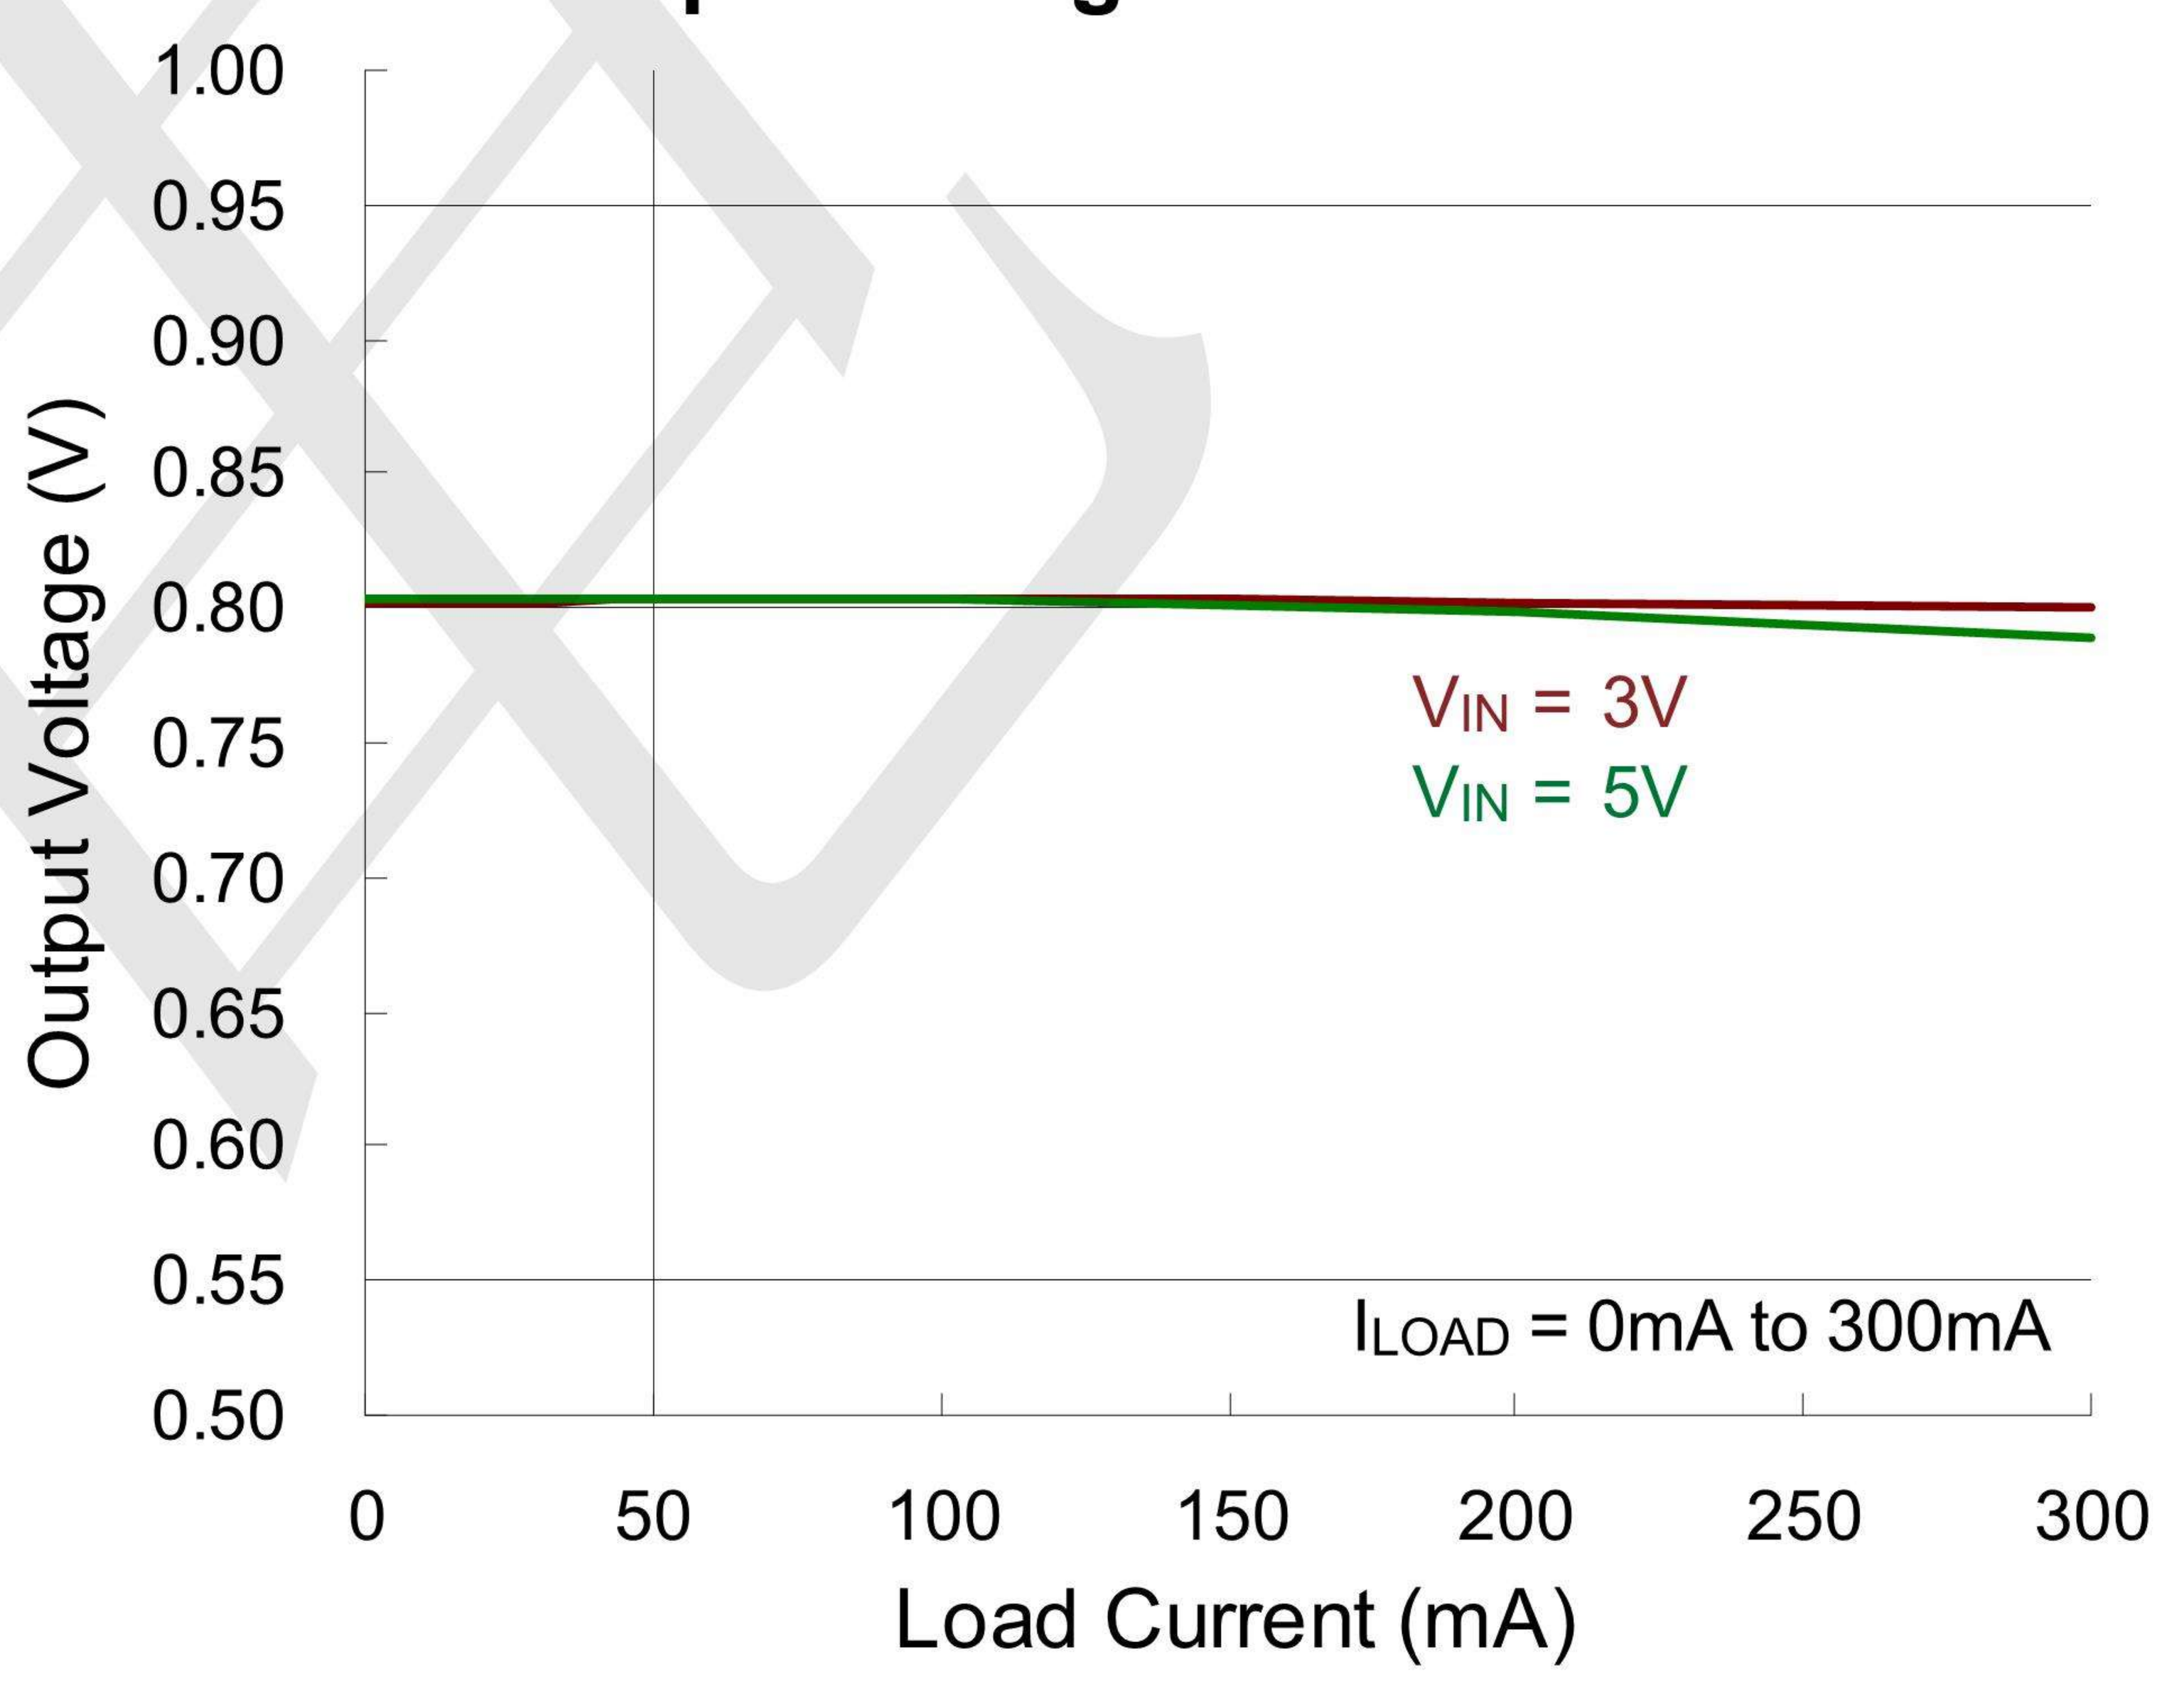

Ground Current vs. Load Current

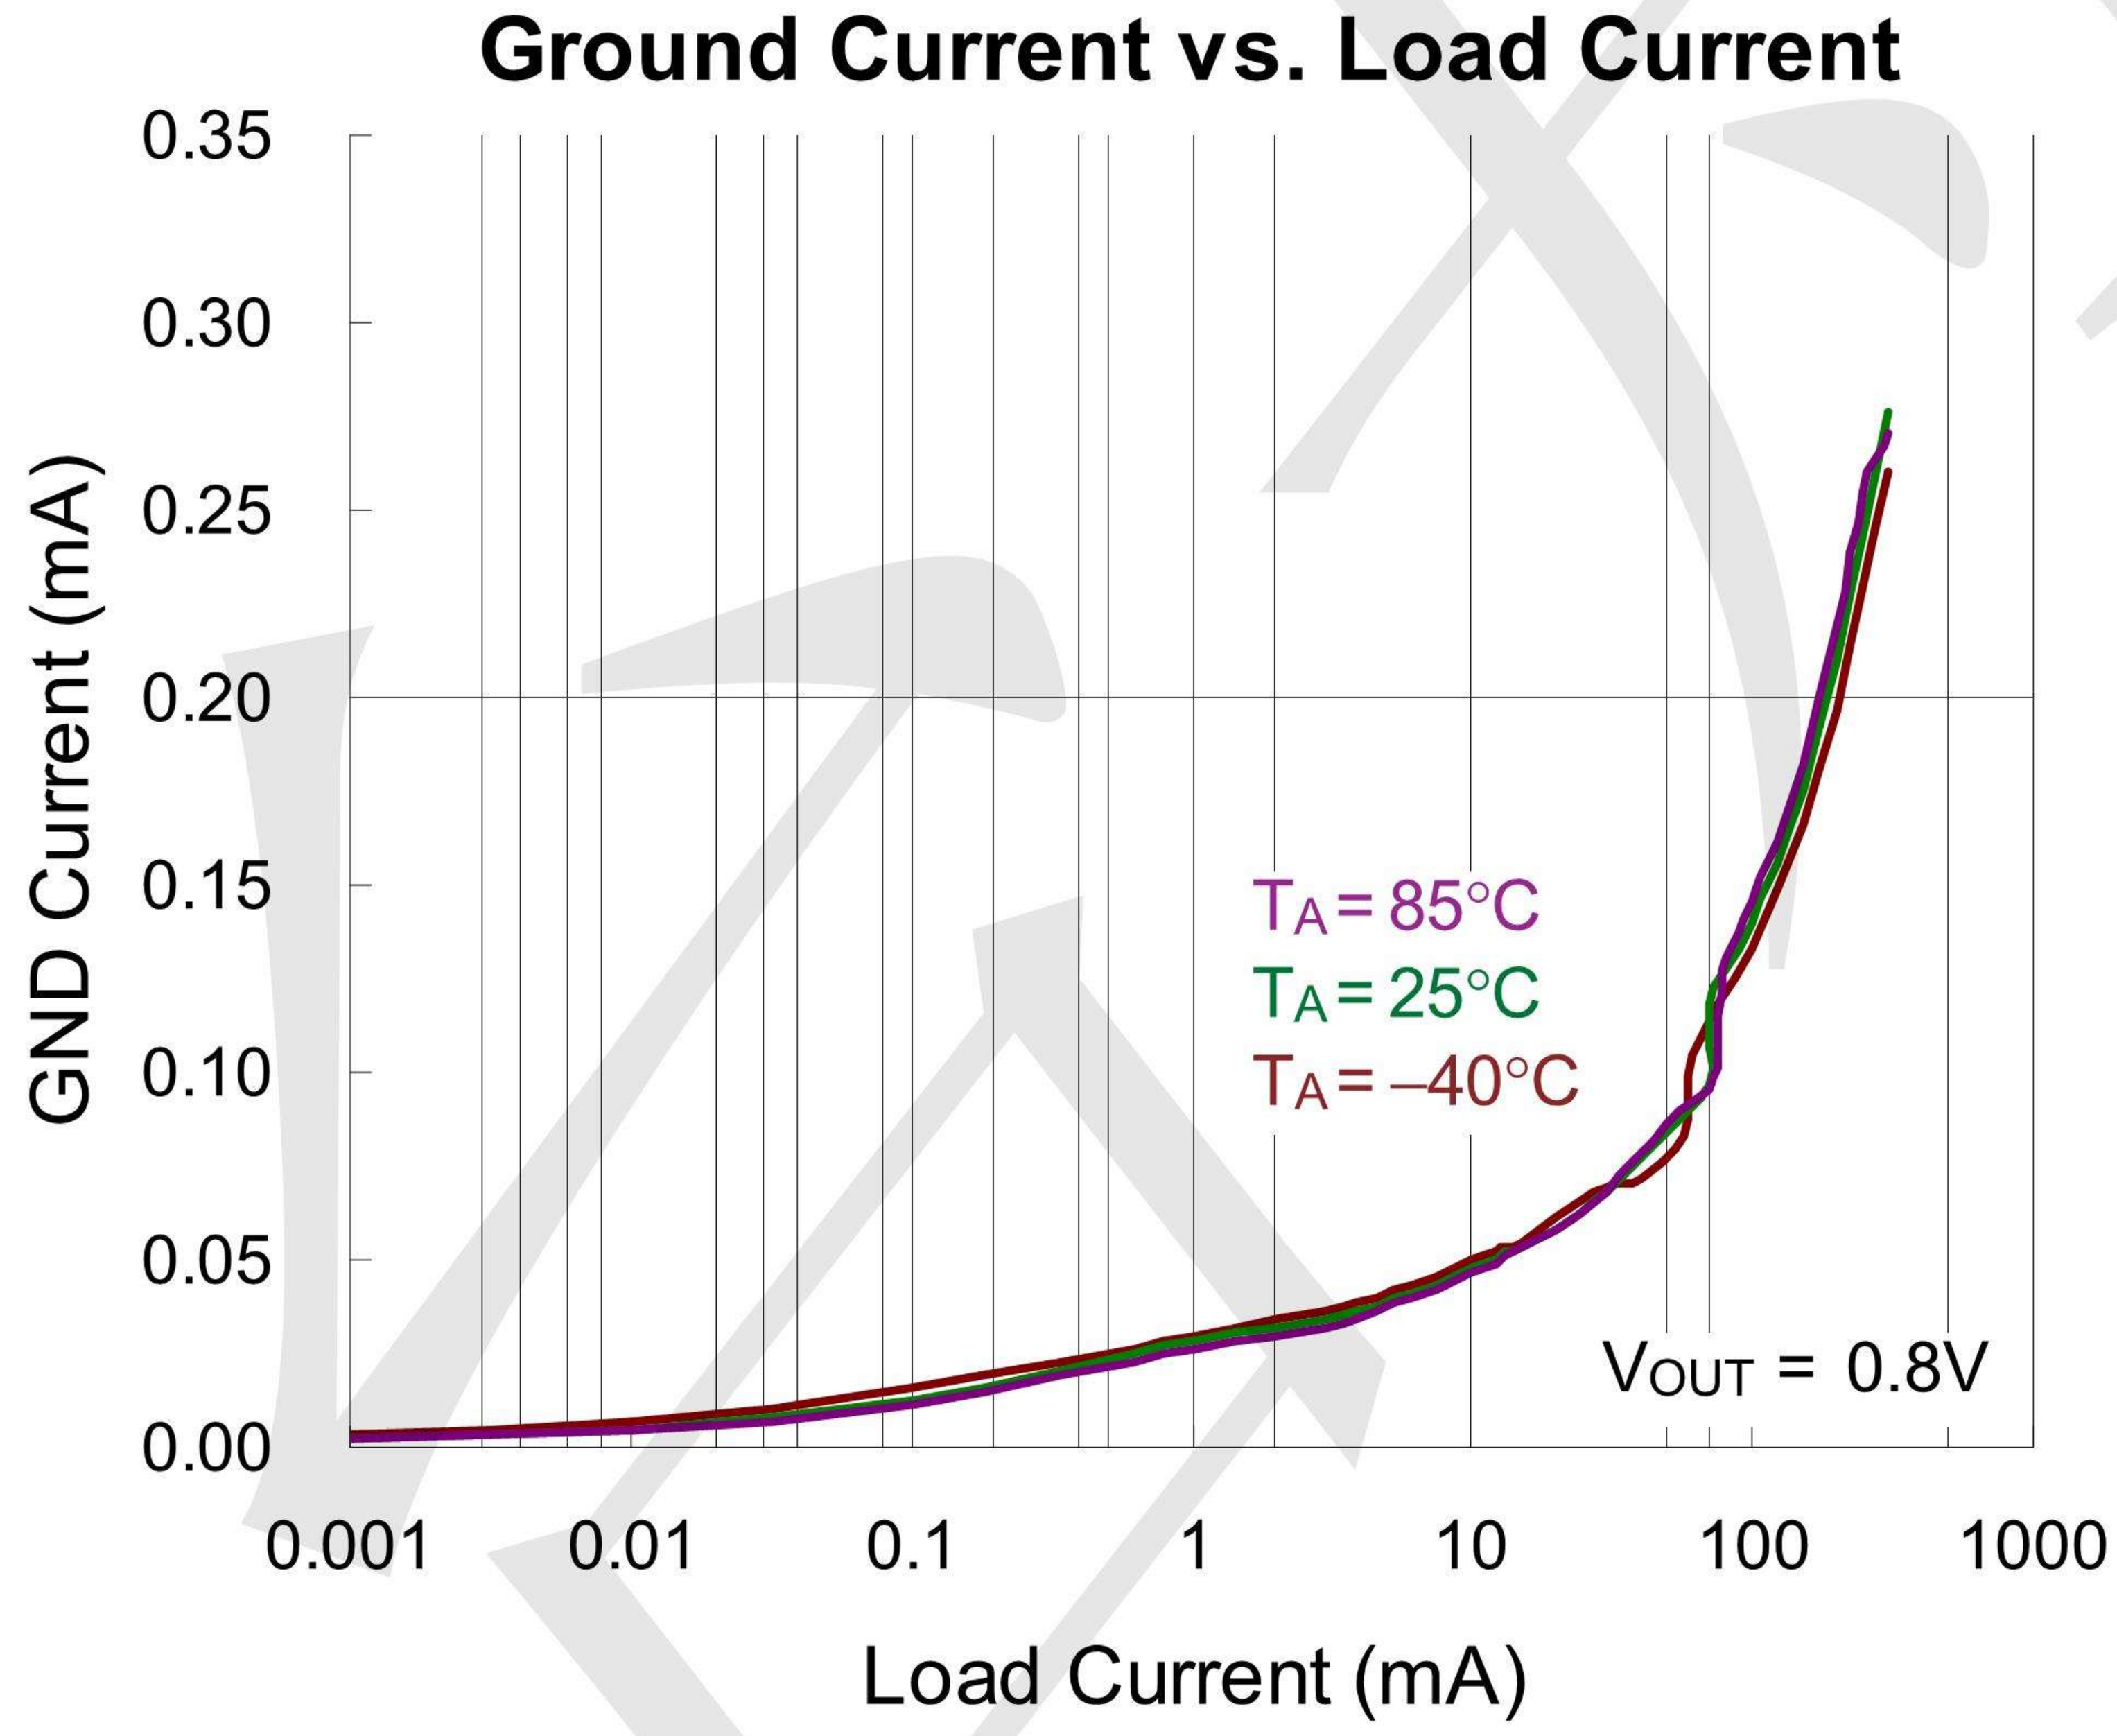

Ground Current vs. Load Current

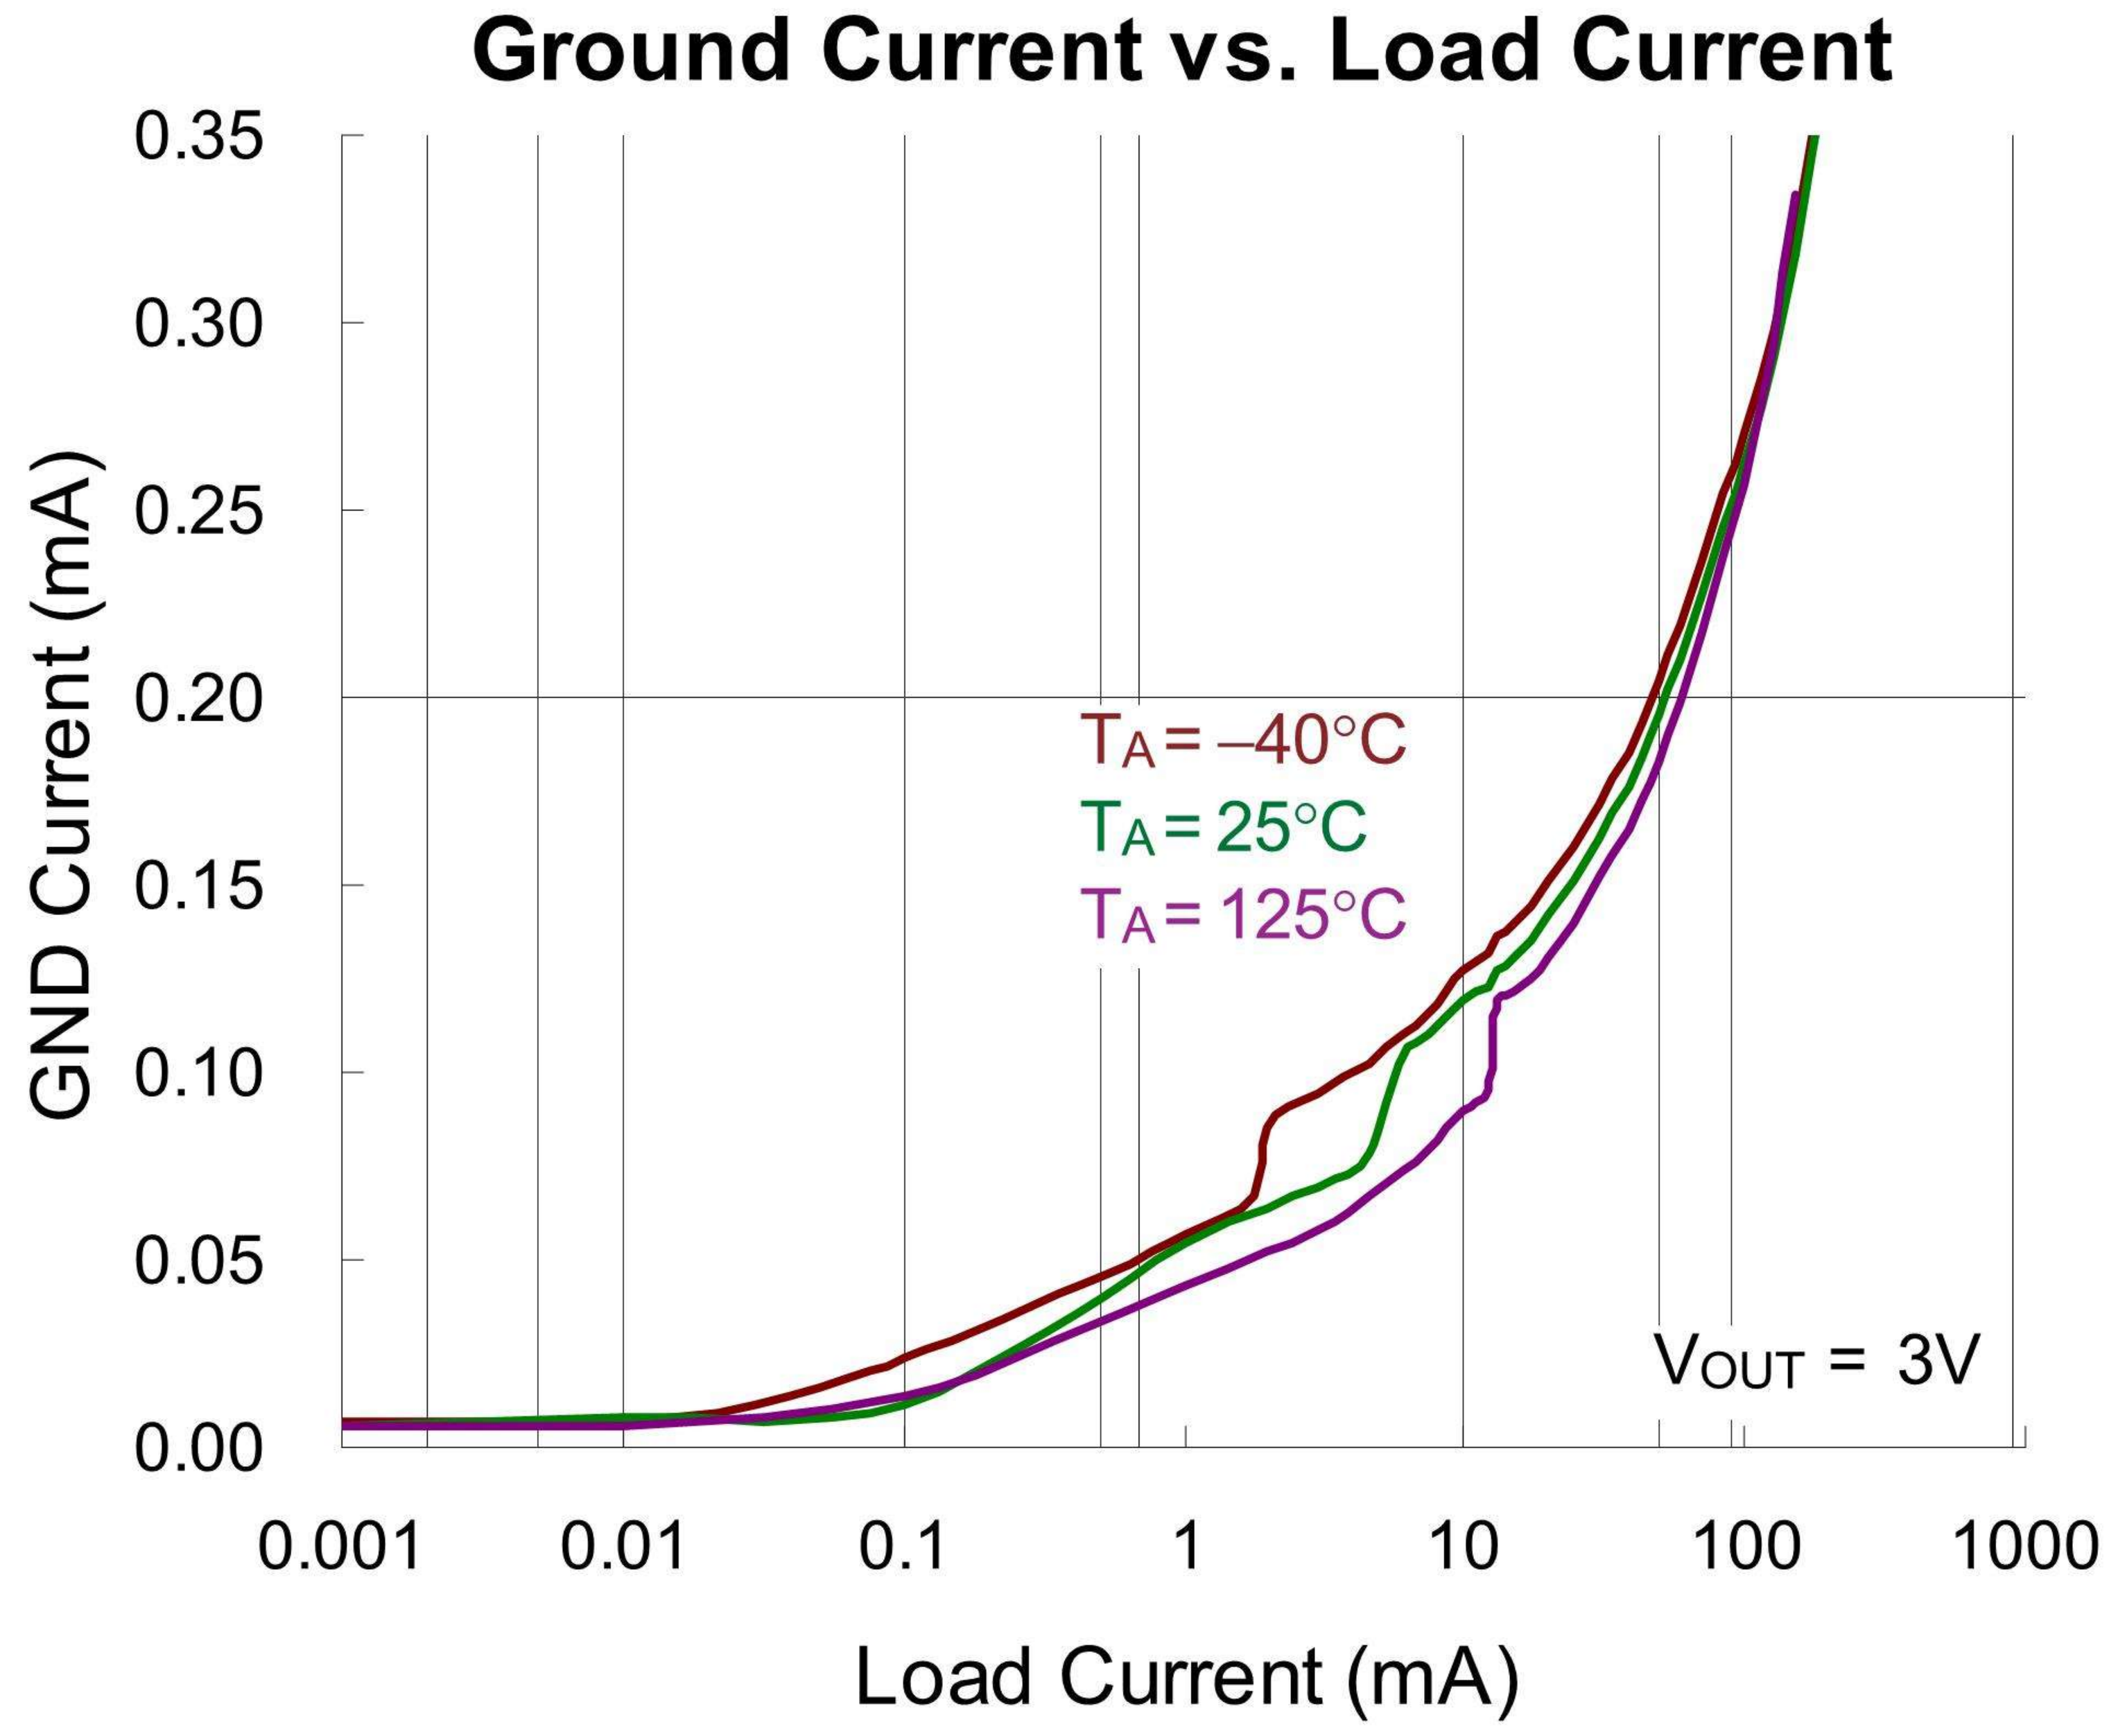

Shutdown Current vs. Input Voltage

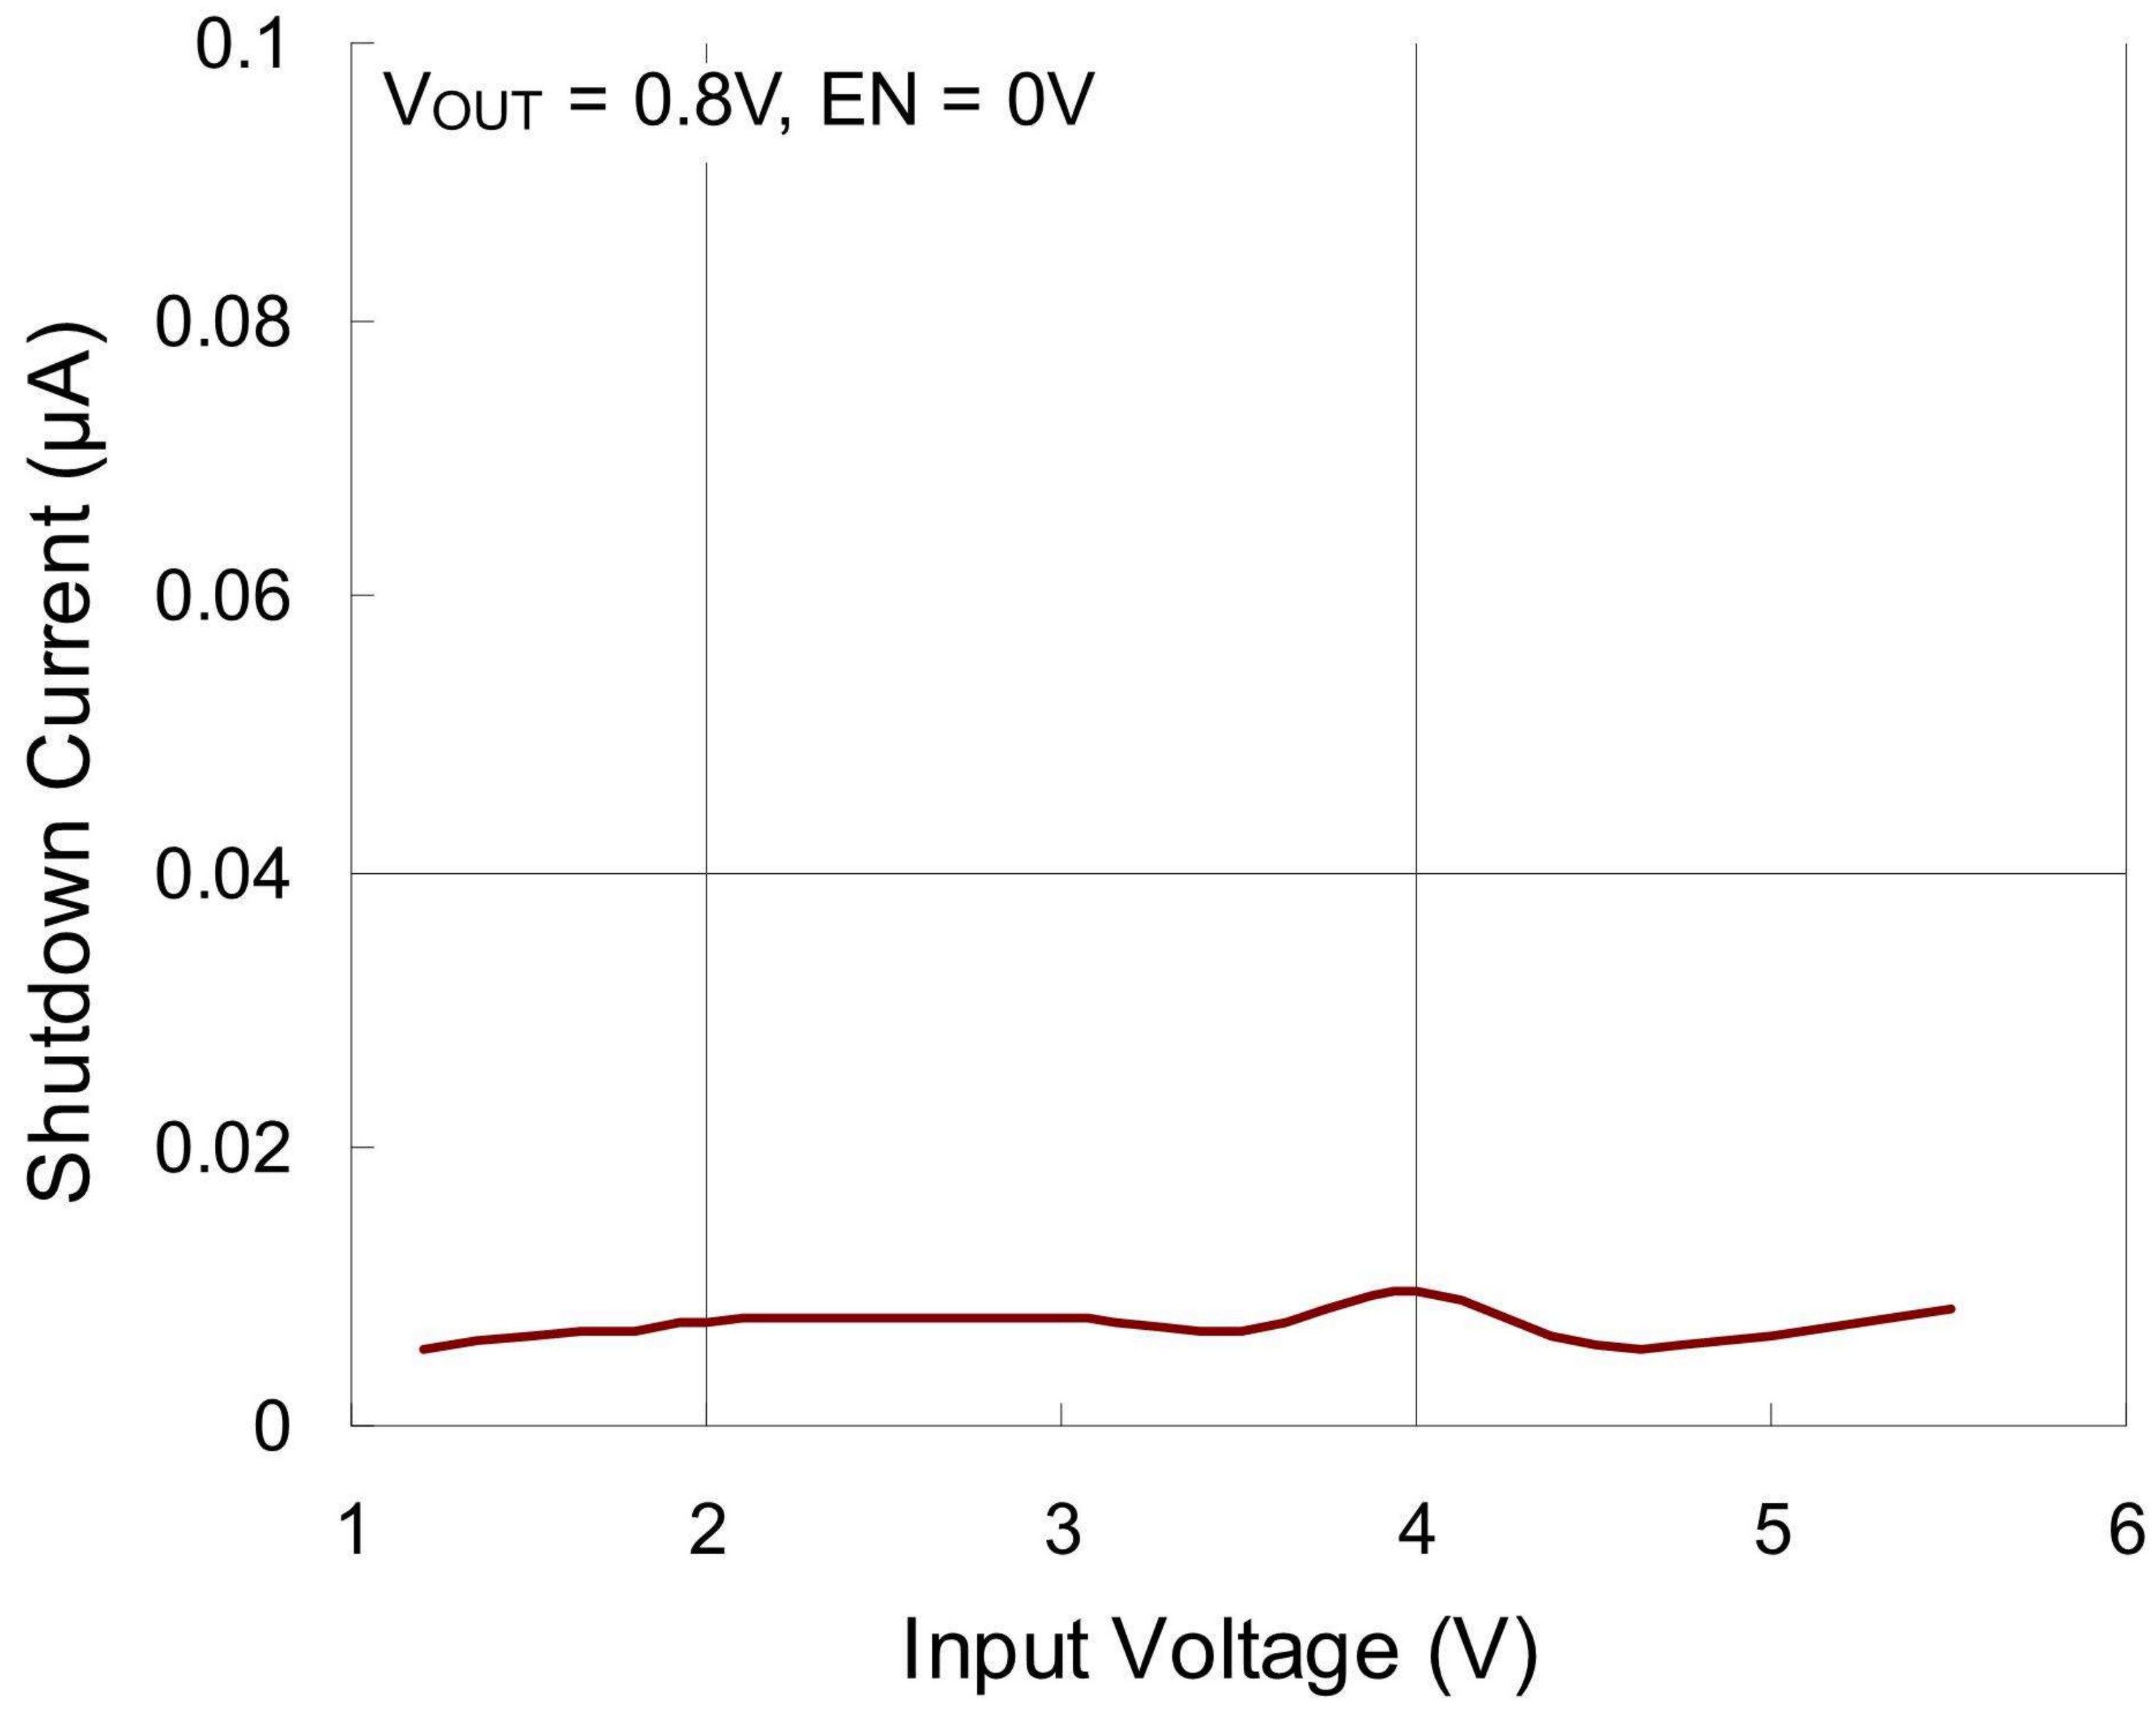

Shutdown Leakage Current vs. Temperature

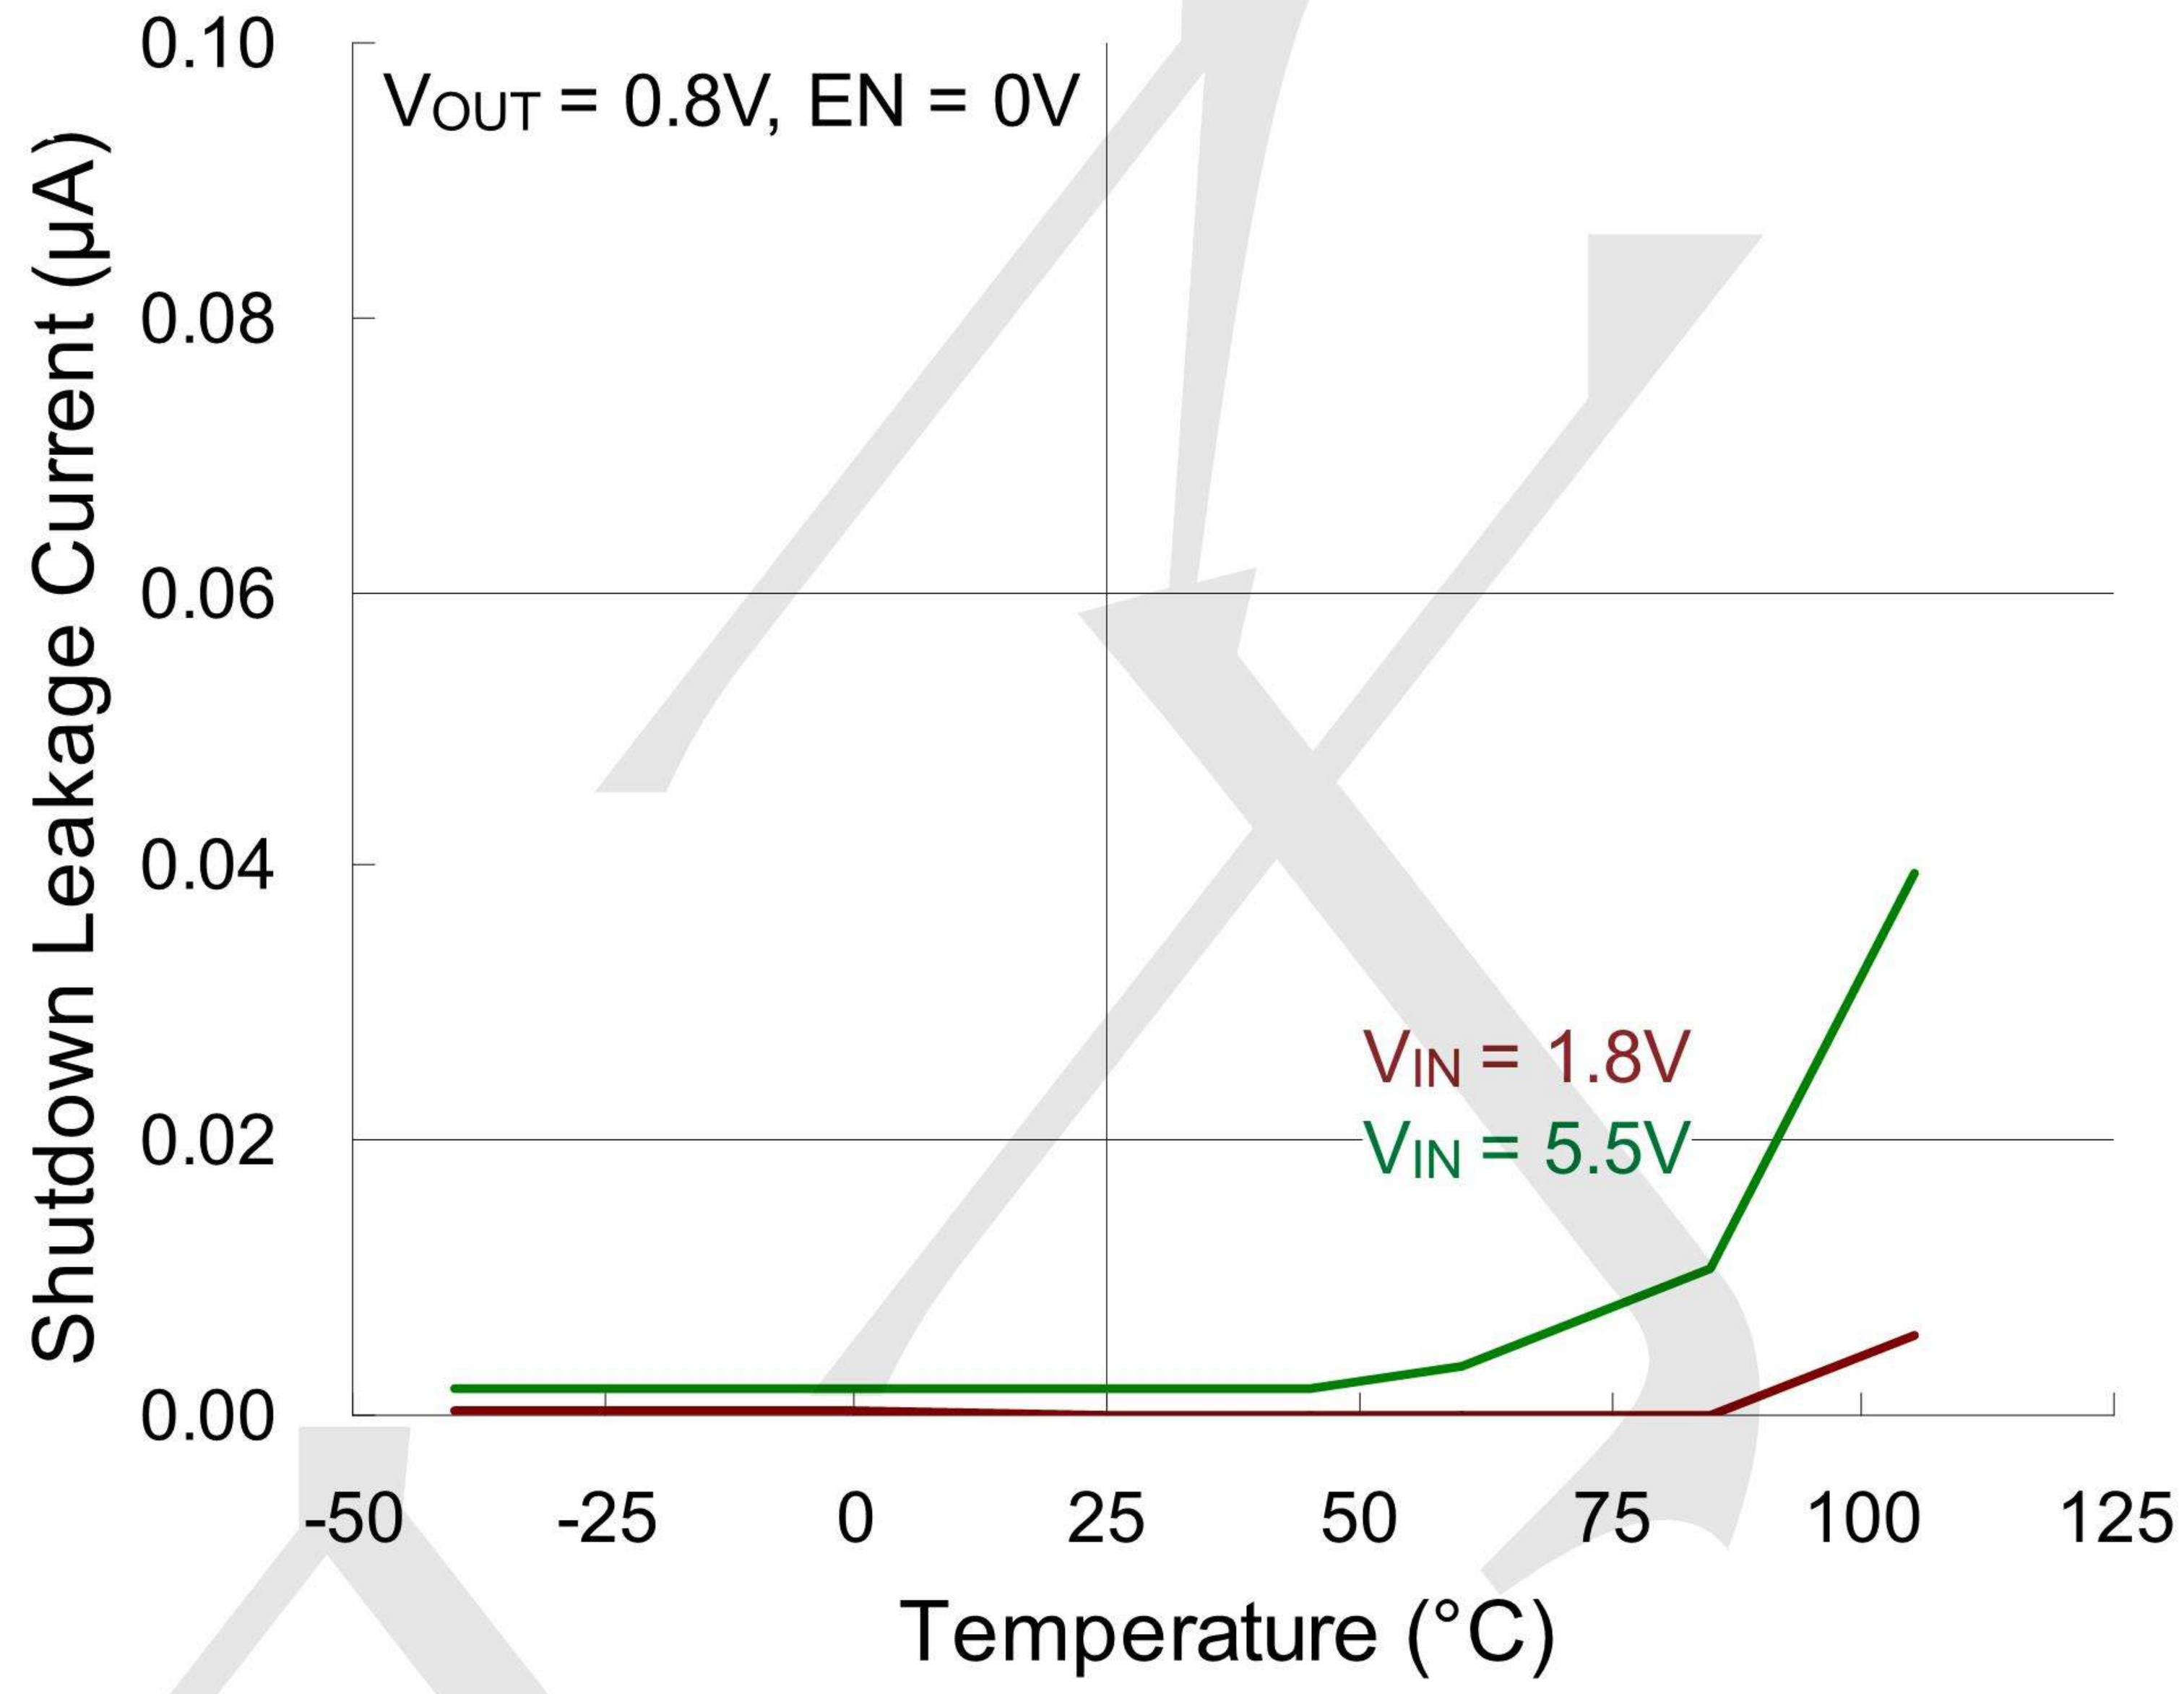

EN Threshold vs. Input Voltage

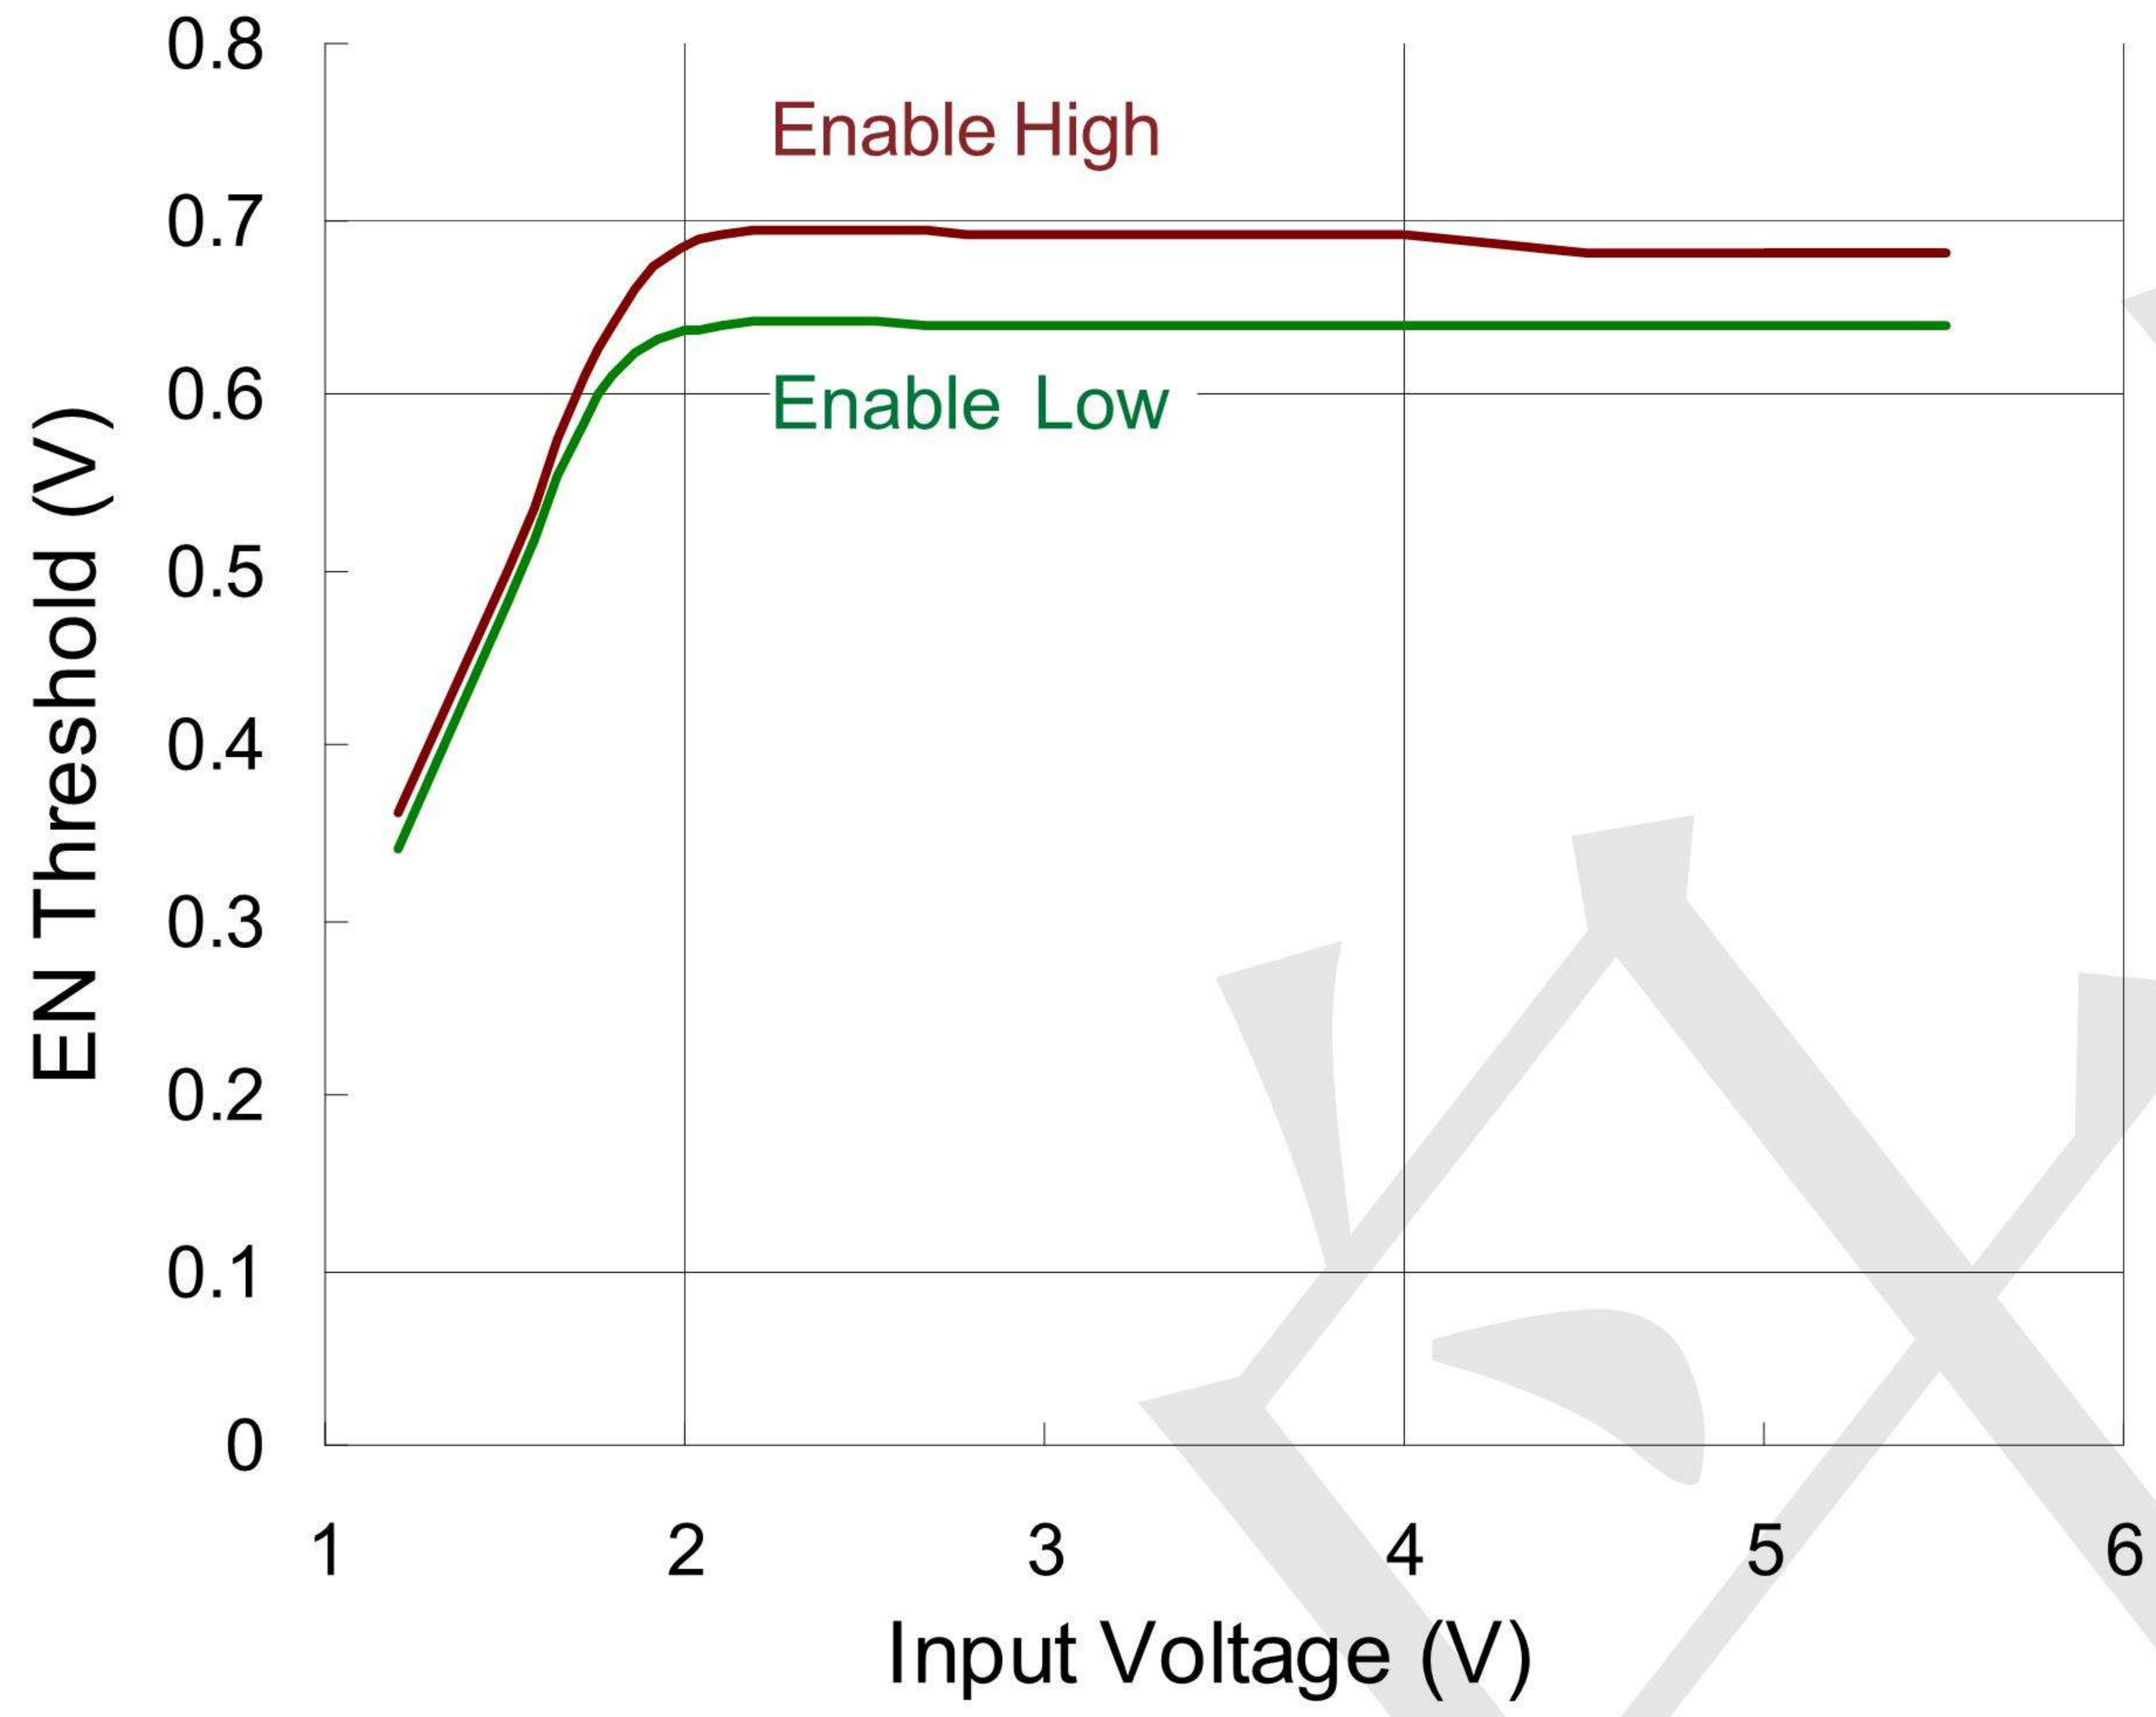

EN Threshold vs. Temperature

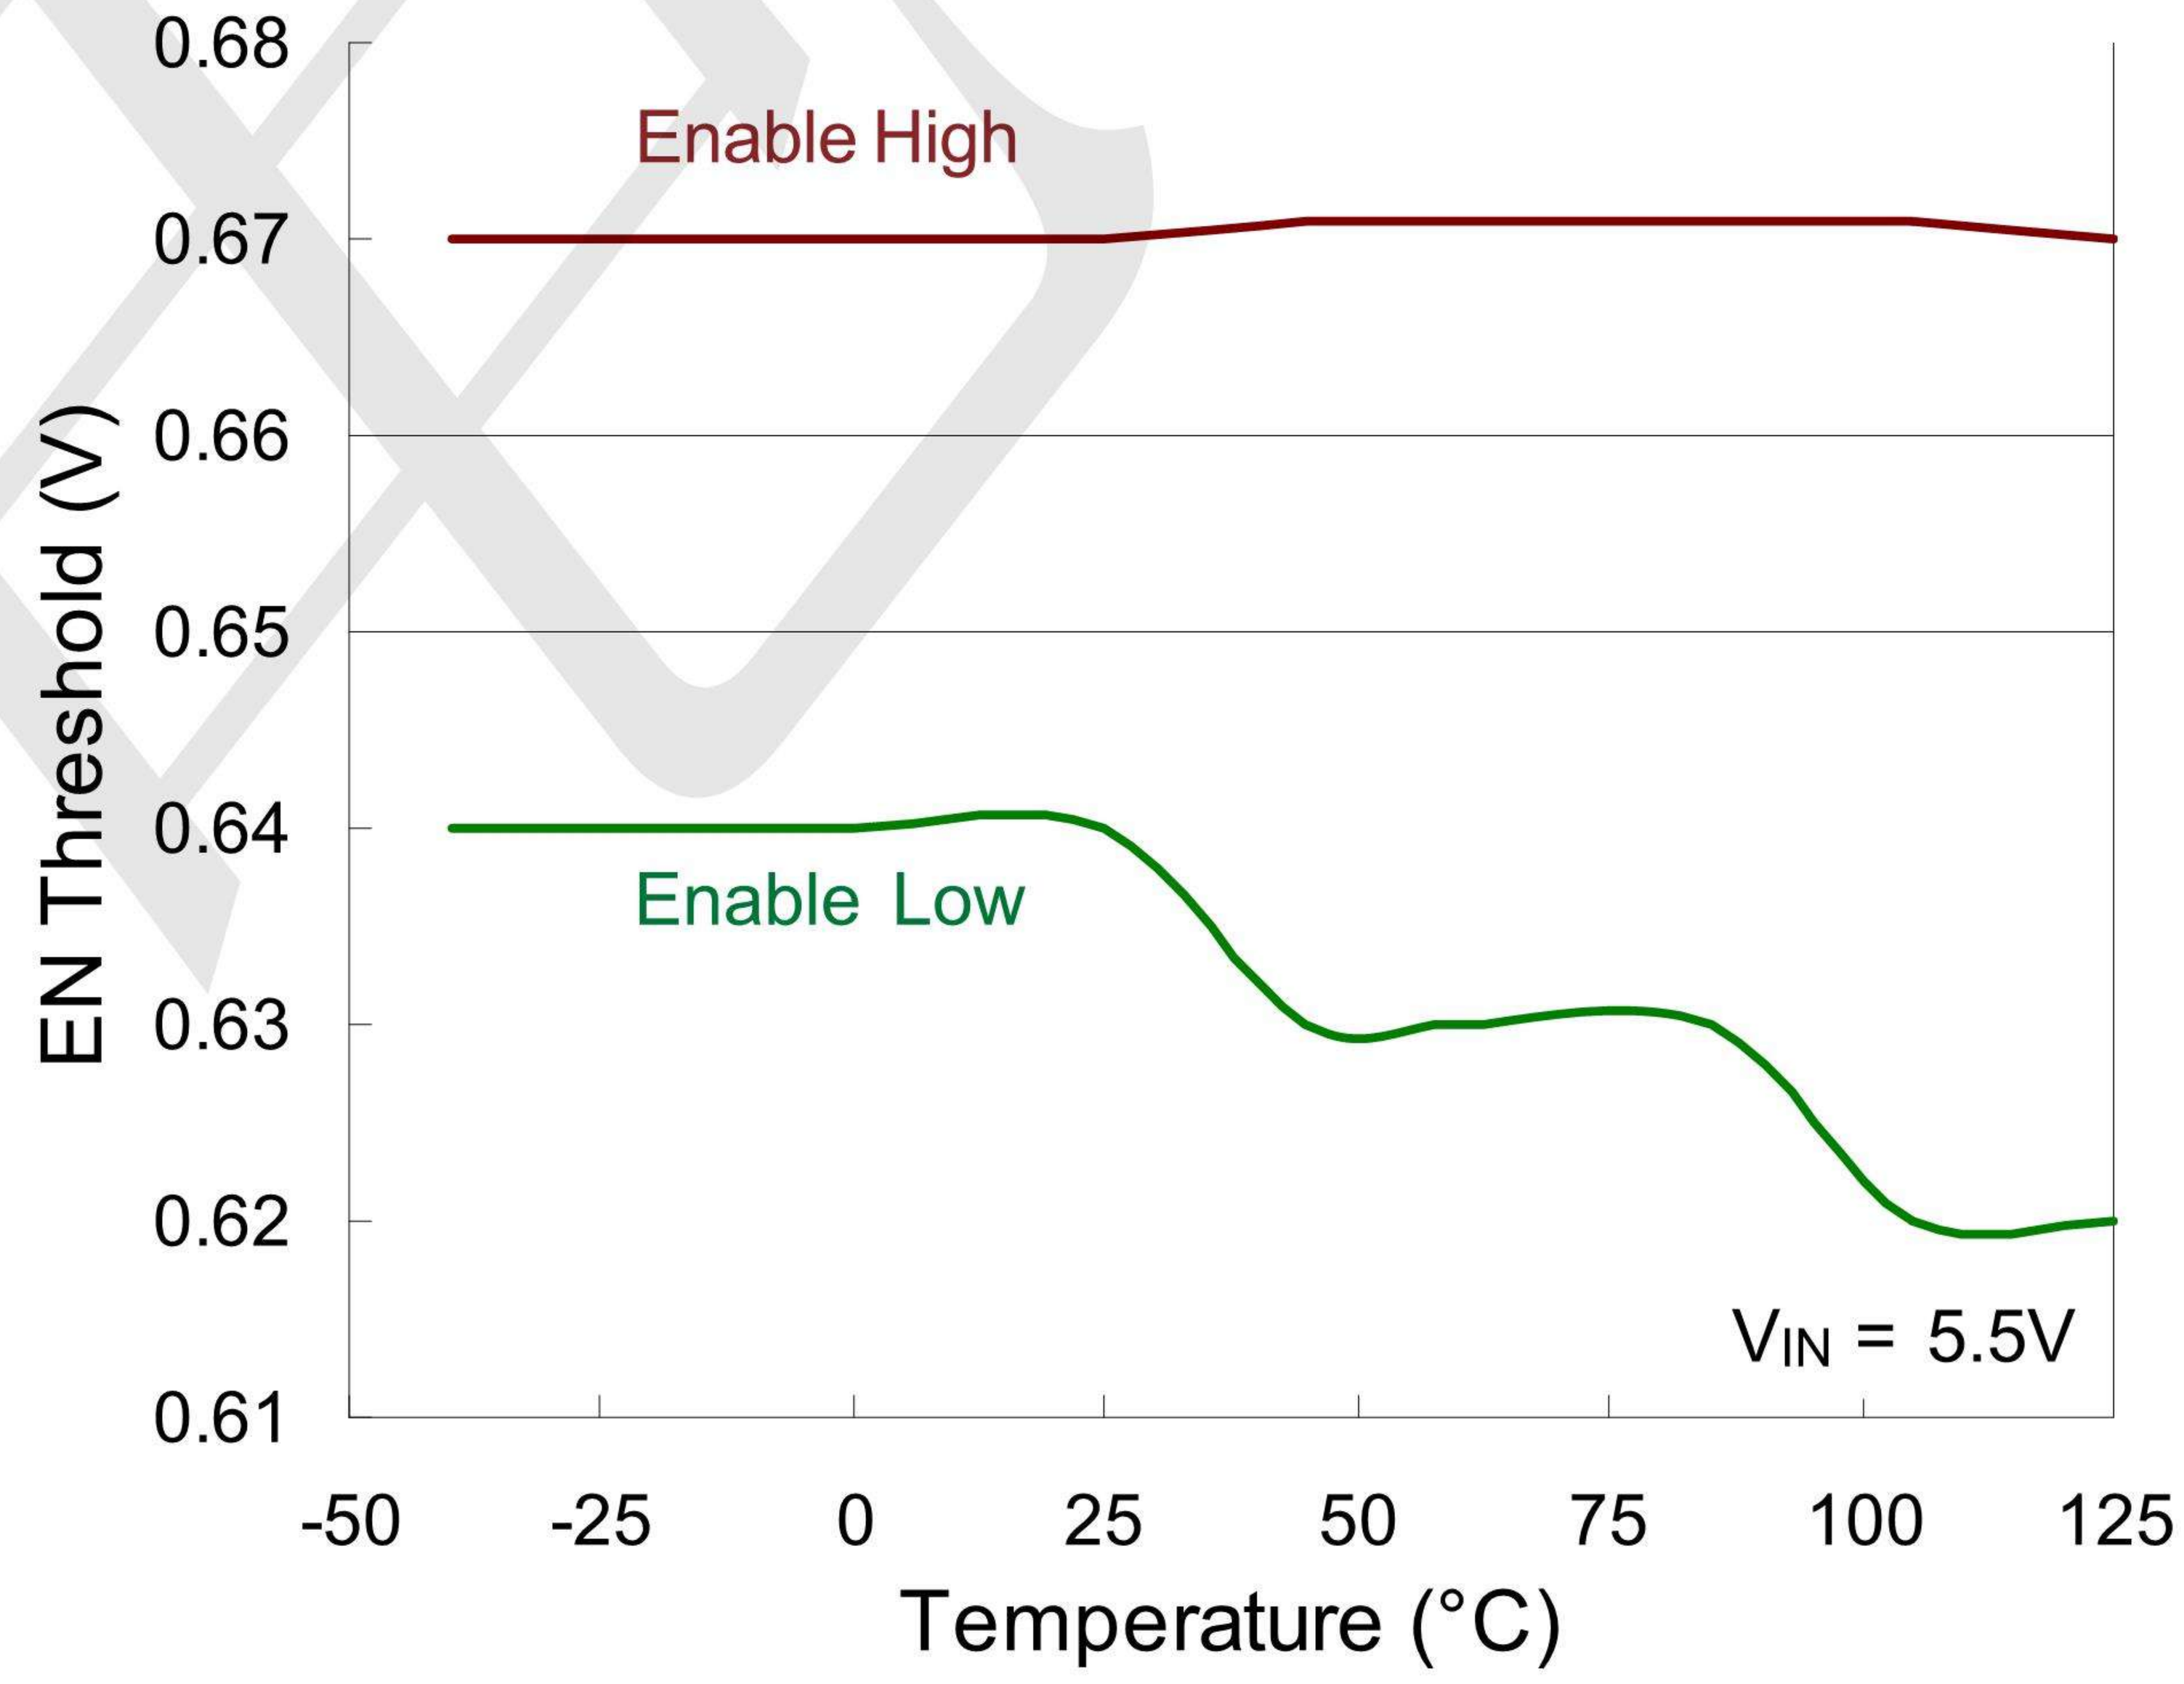

Dropout Voltage vs. Temperature

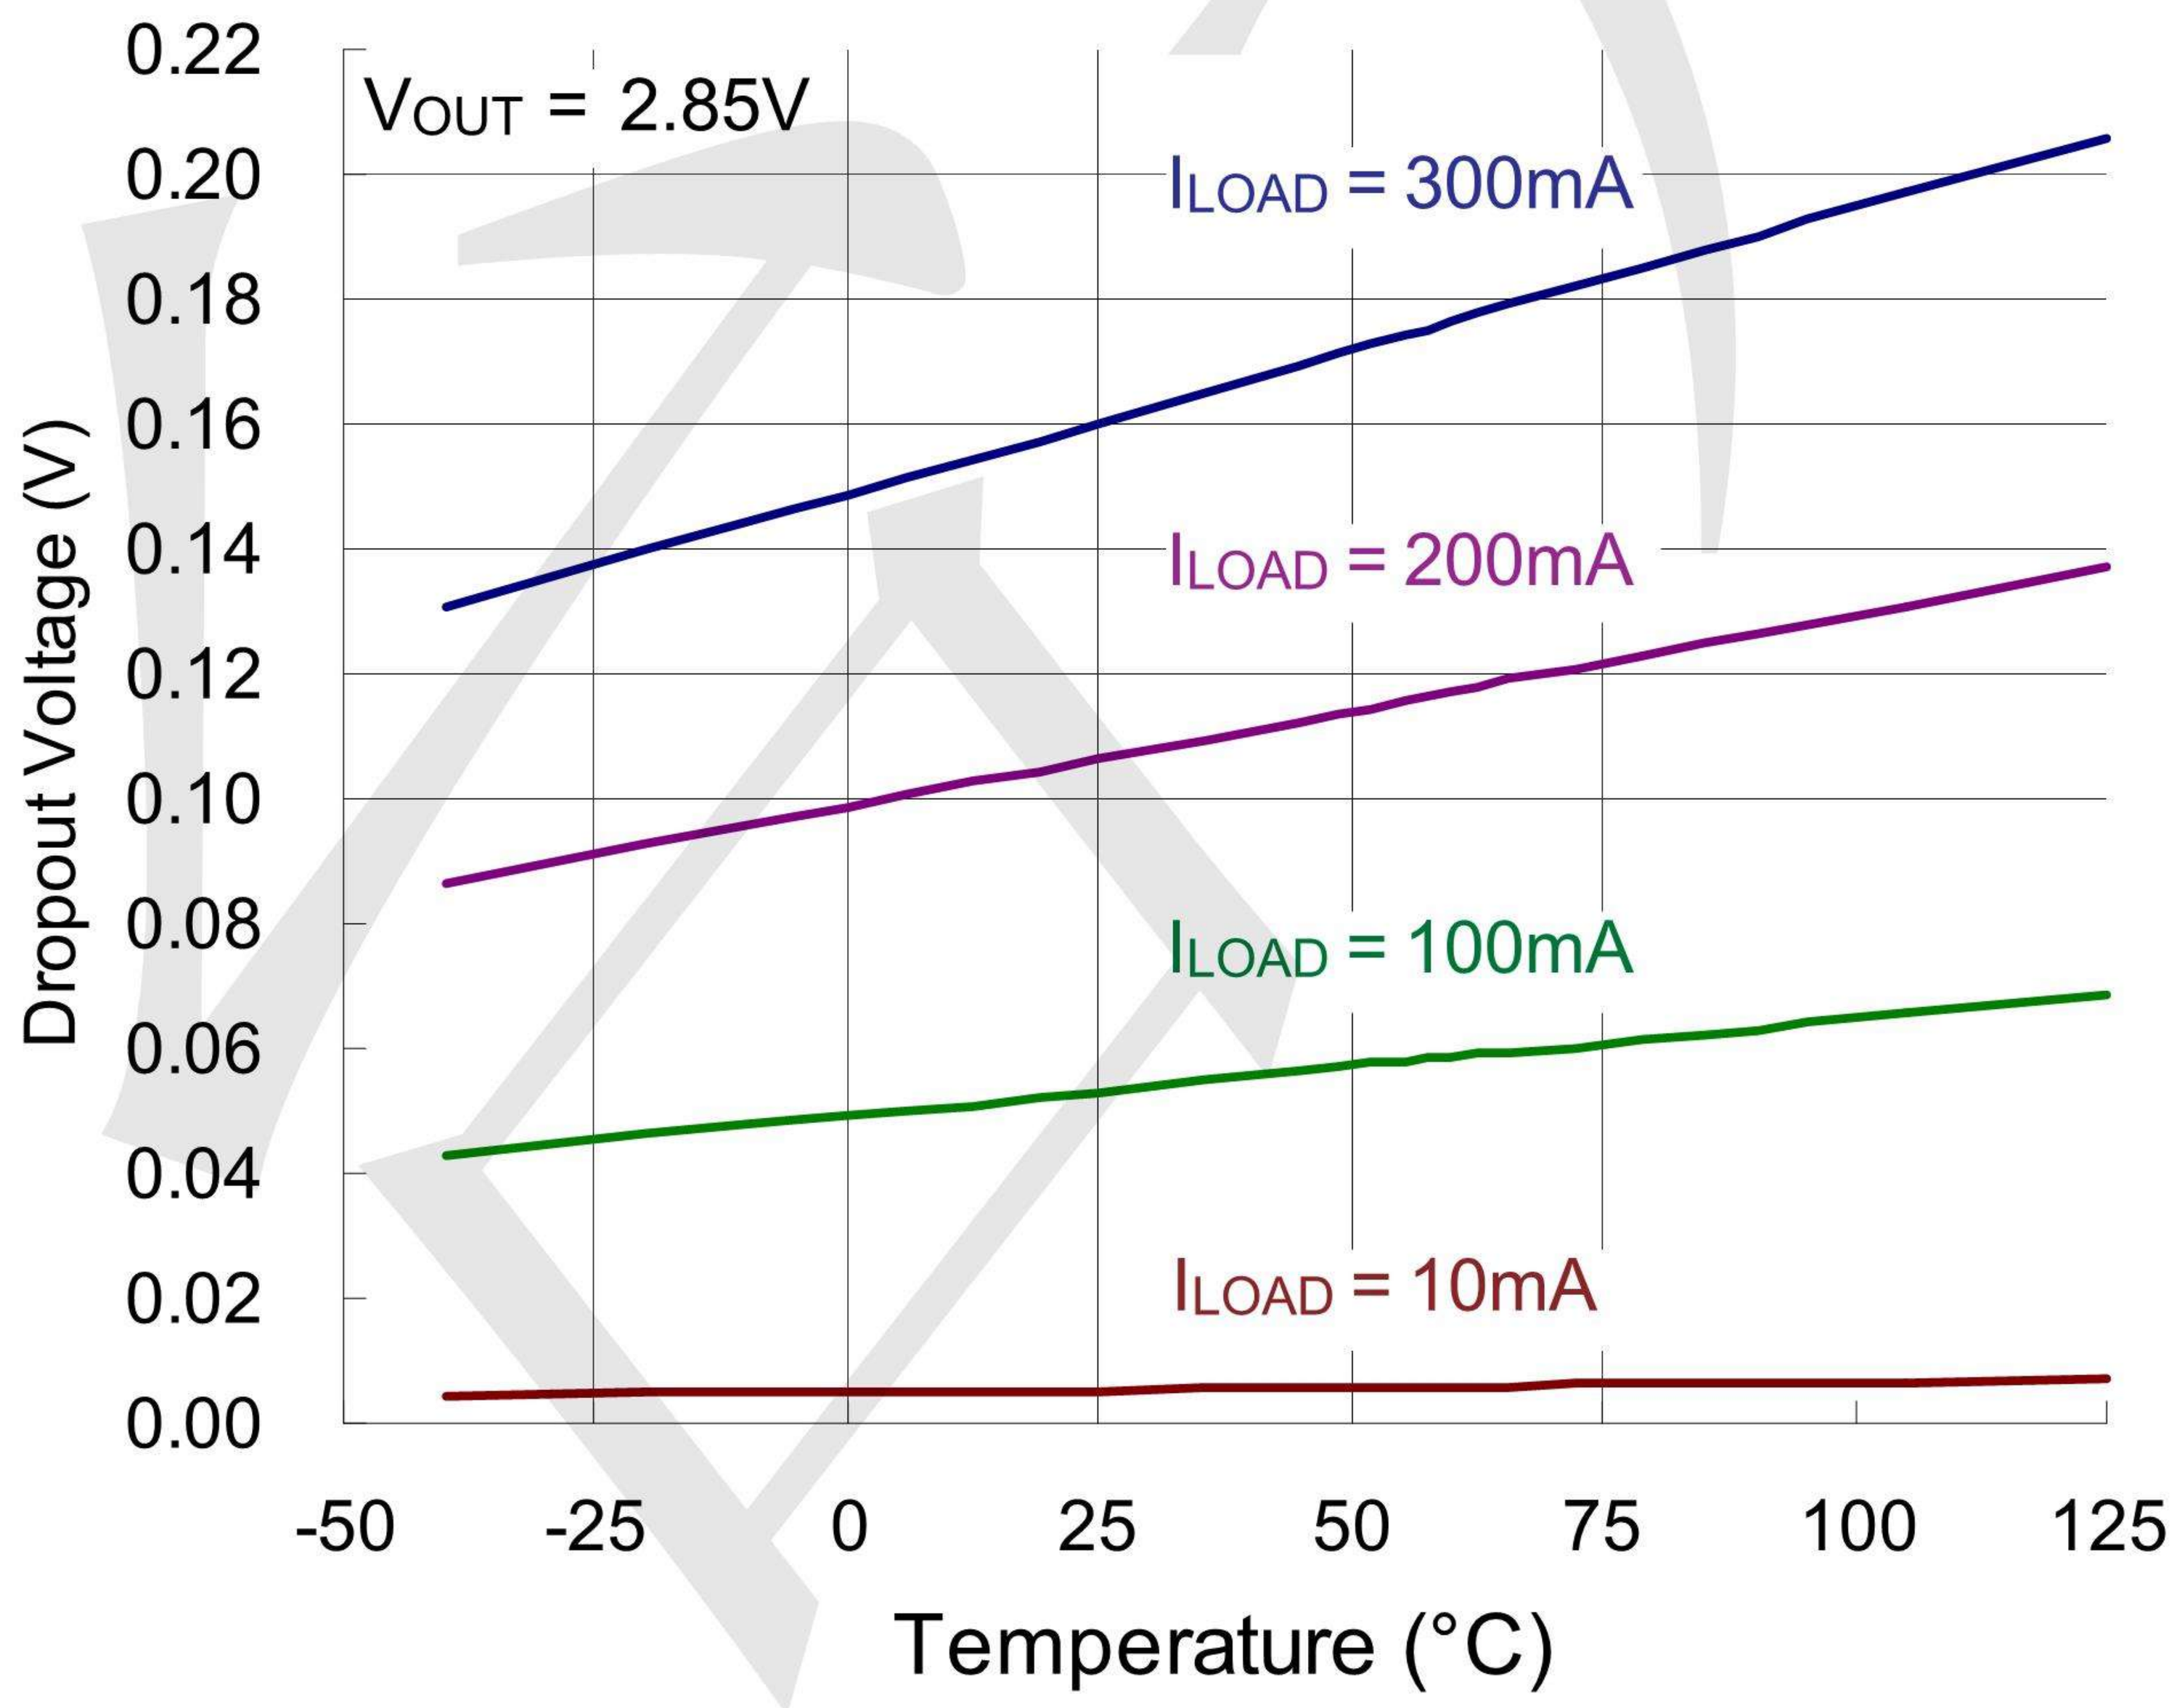

Current Limit vs. Temperature

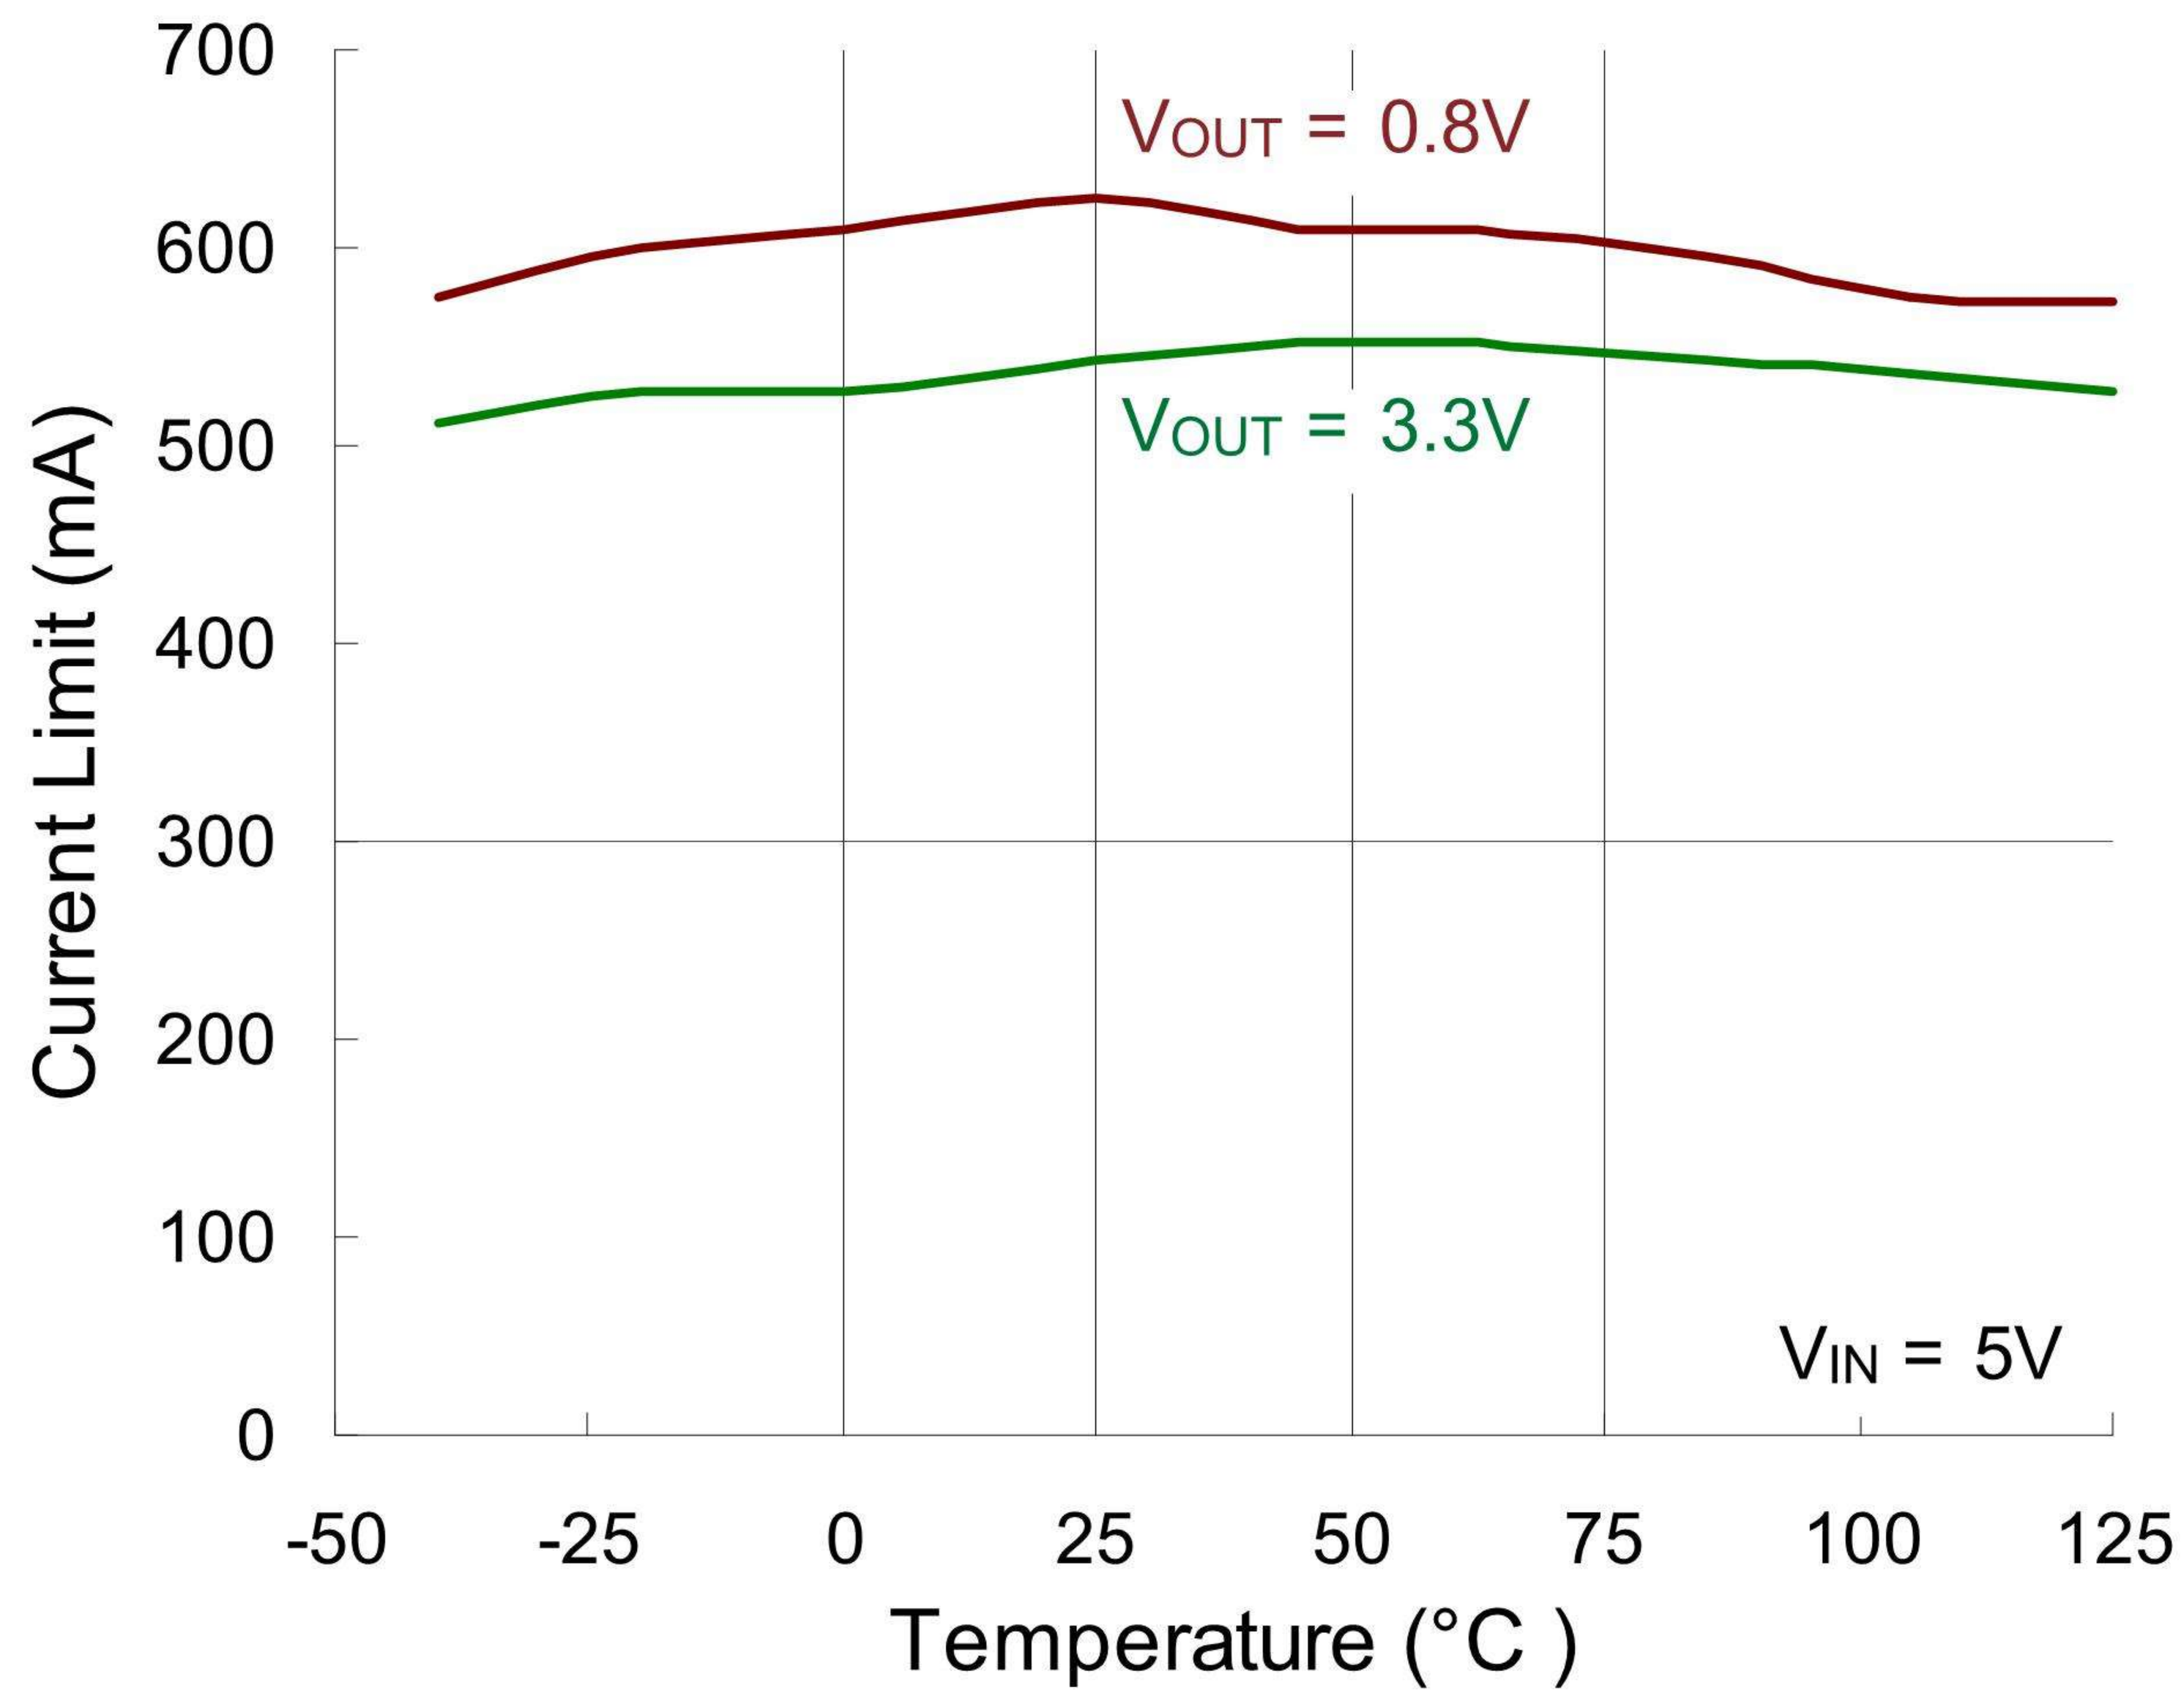

Fold-Back Current Limit vs. Temperature

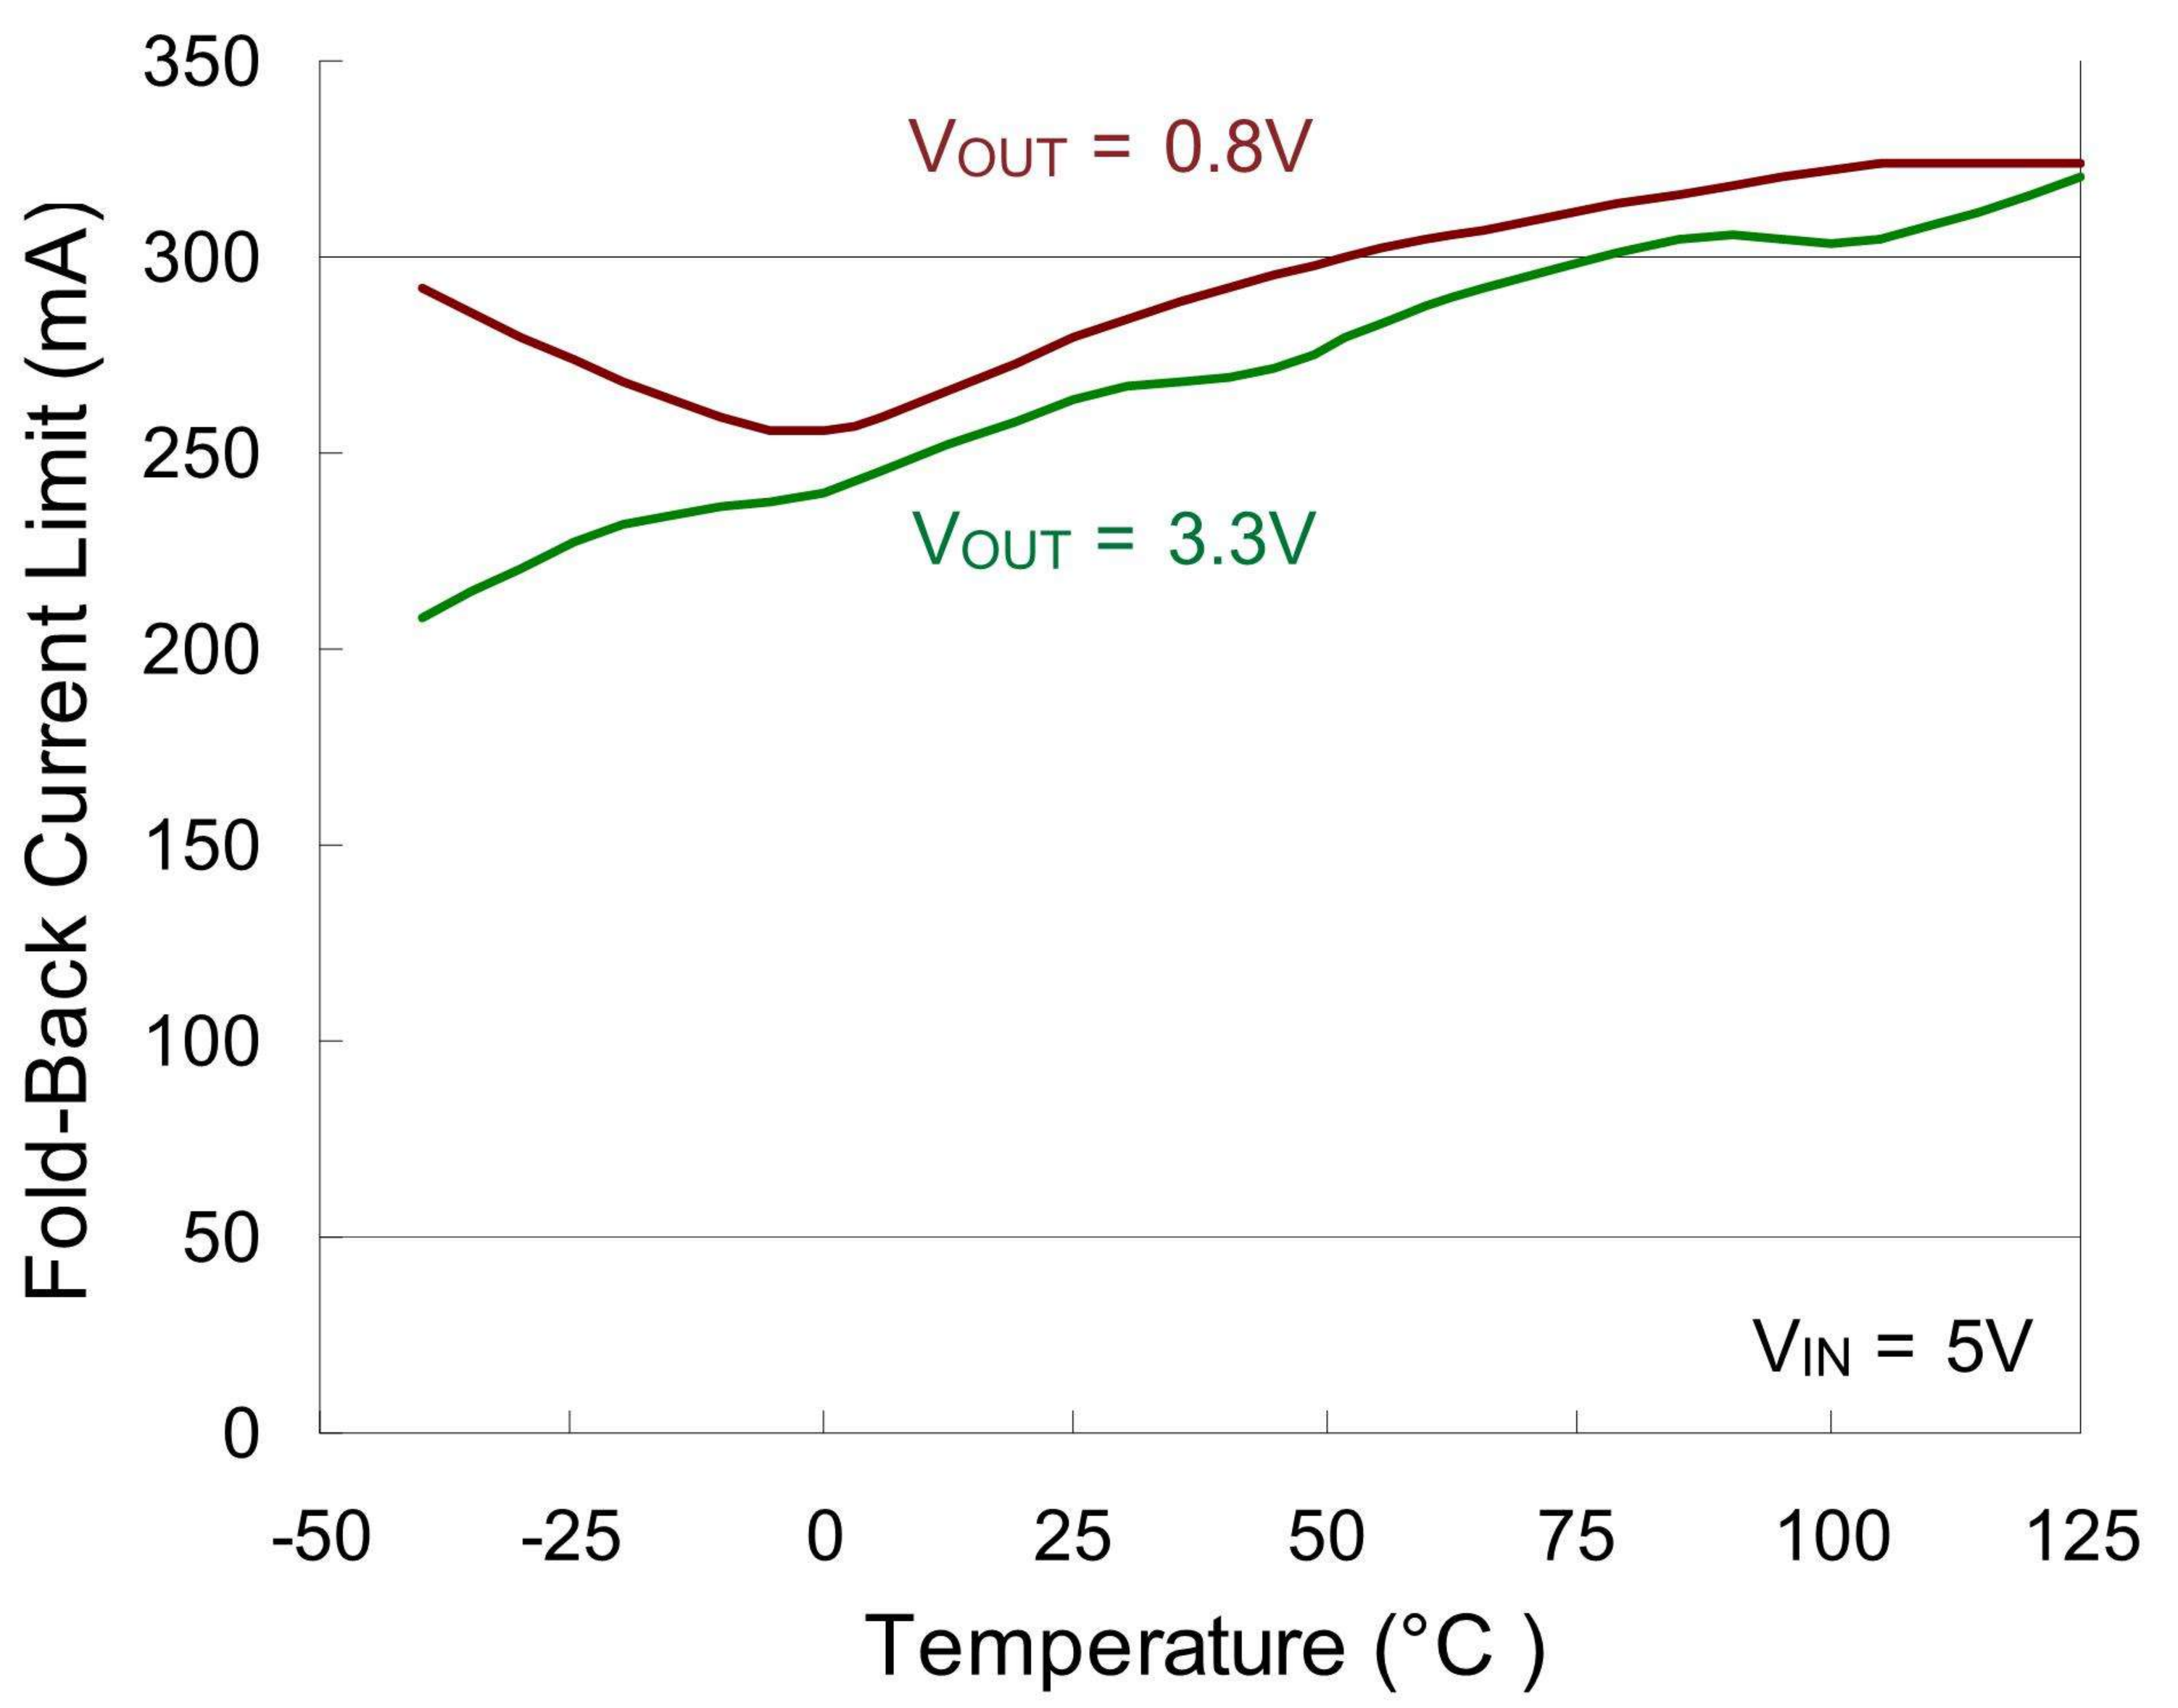

SNS Input Current vs. Temperature

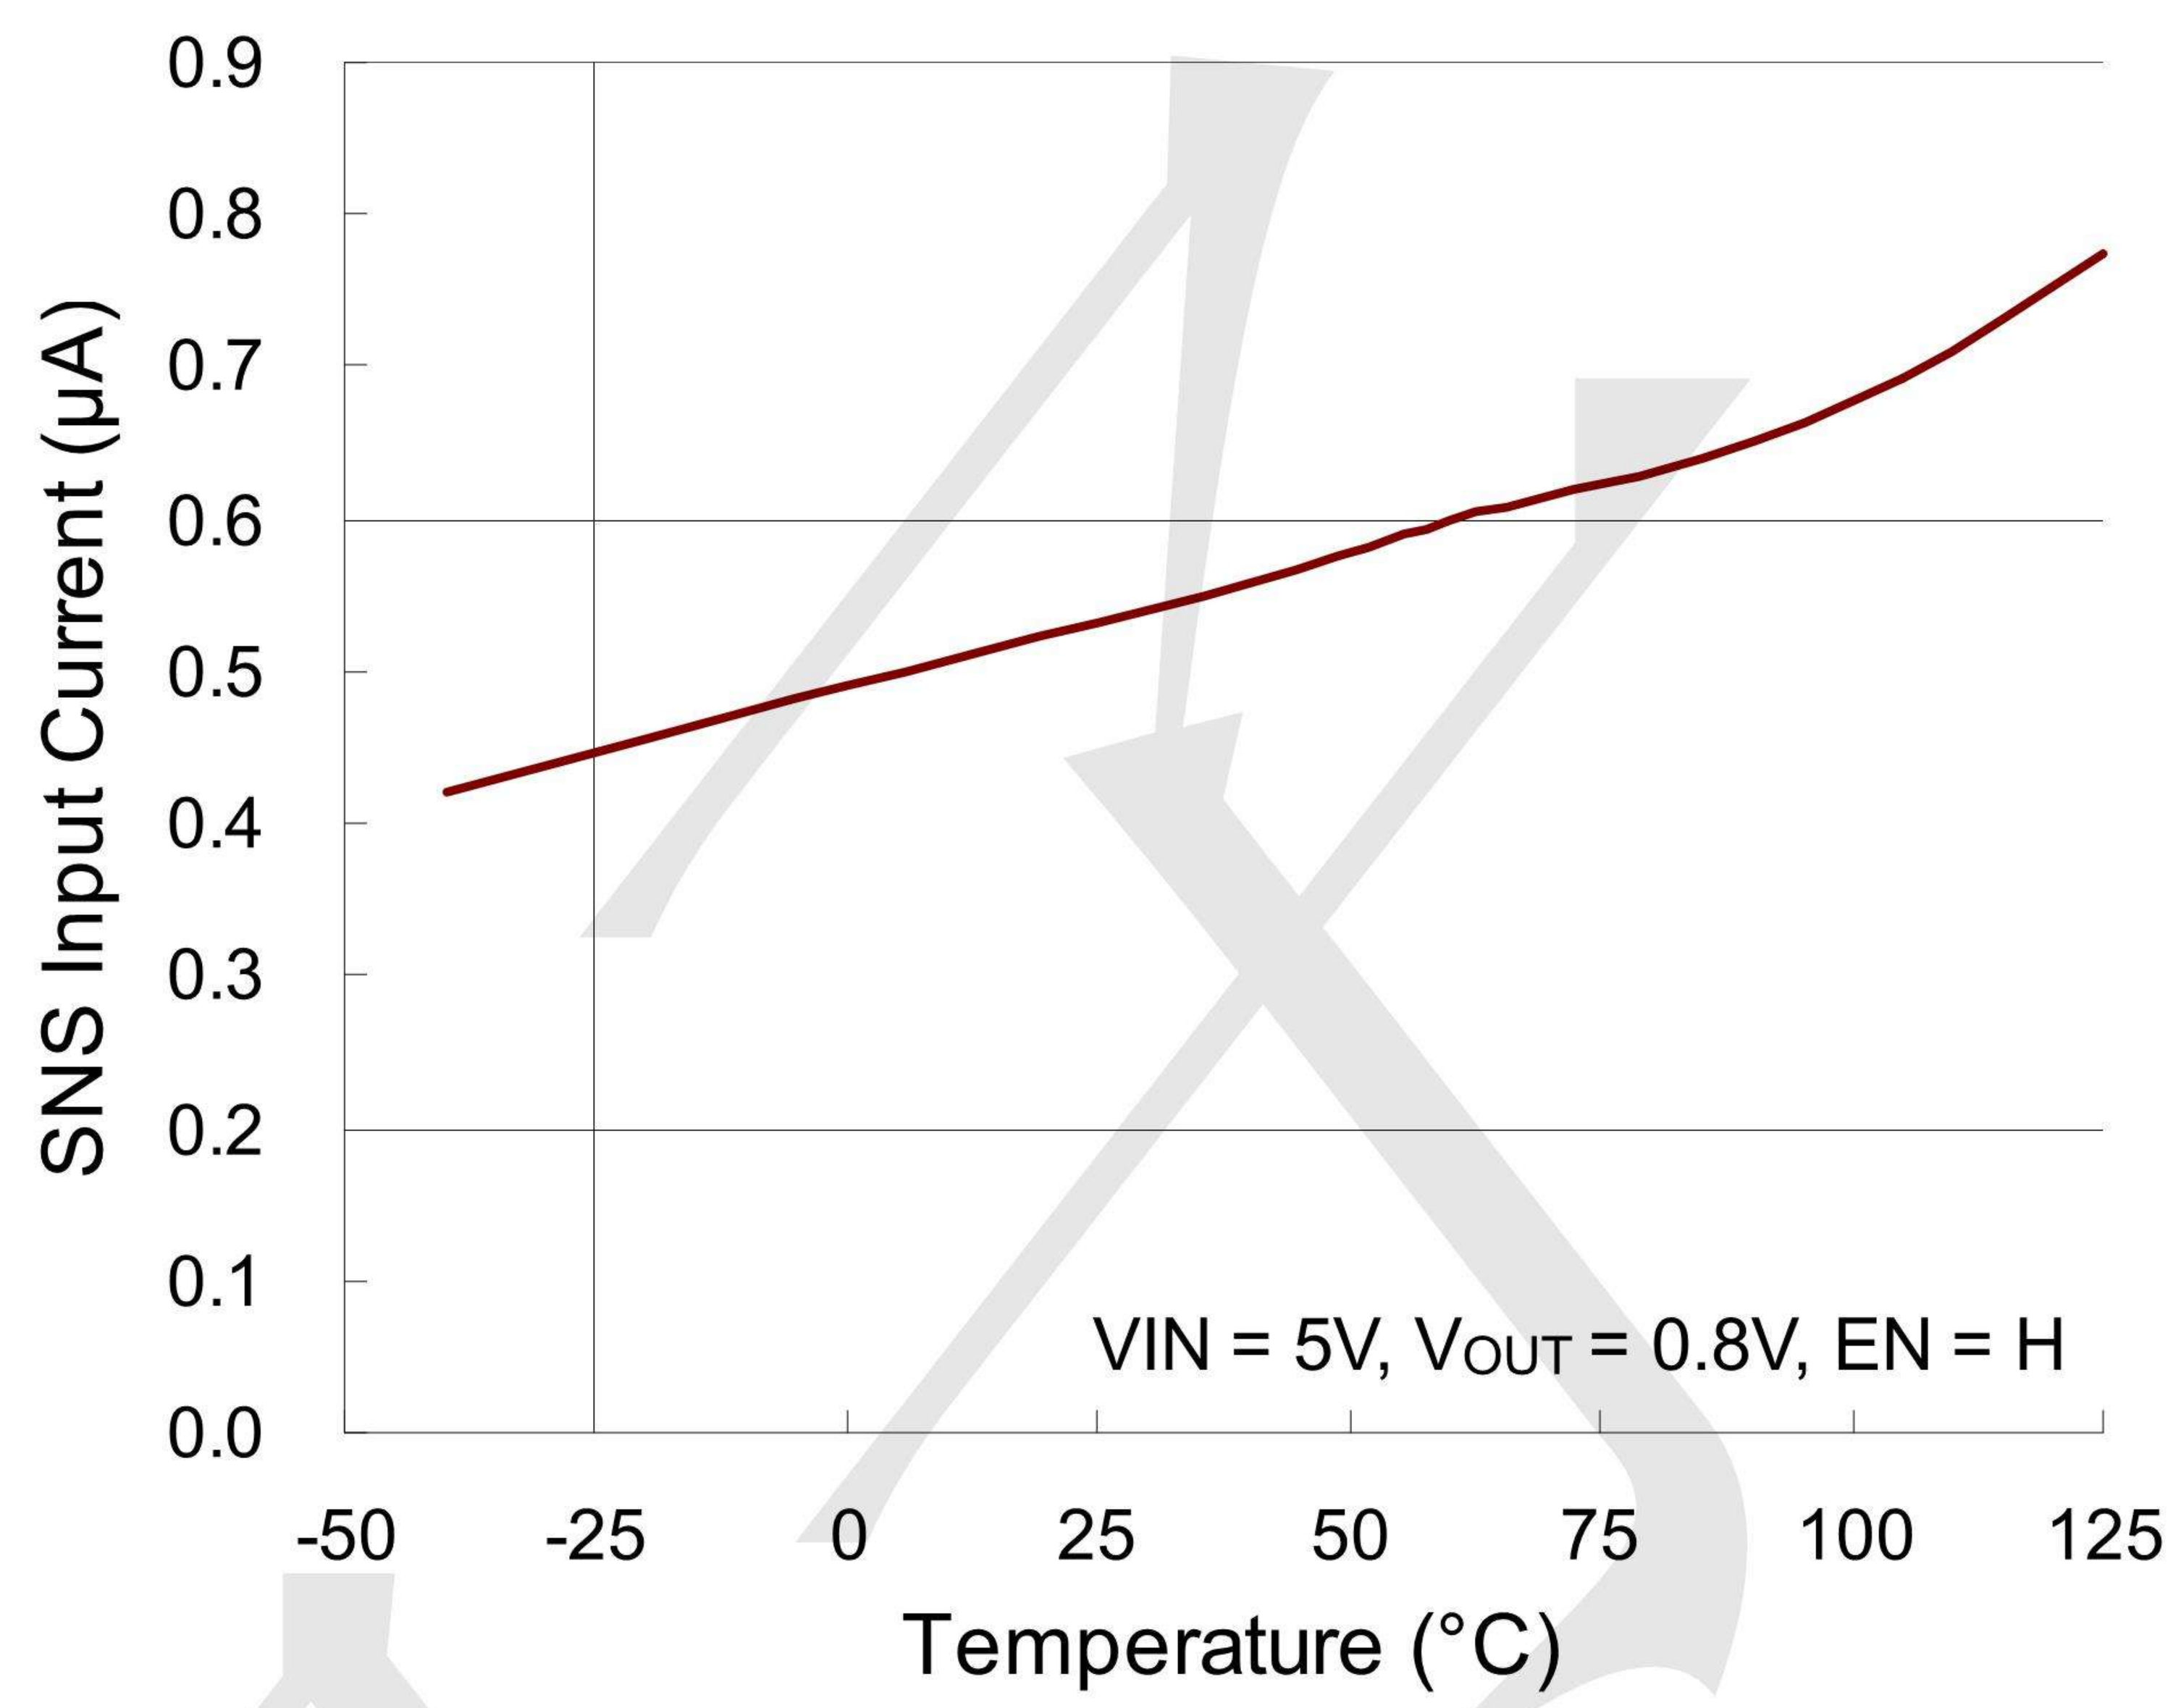

Power On from EN

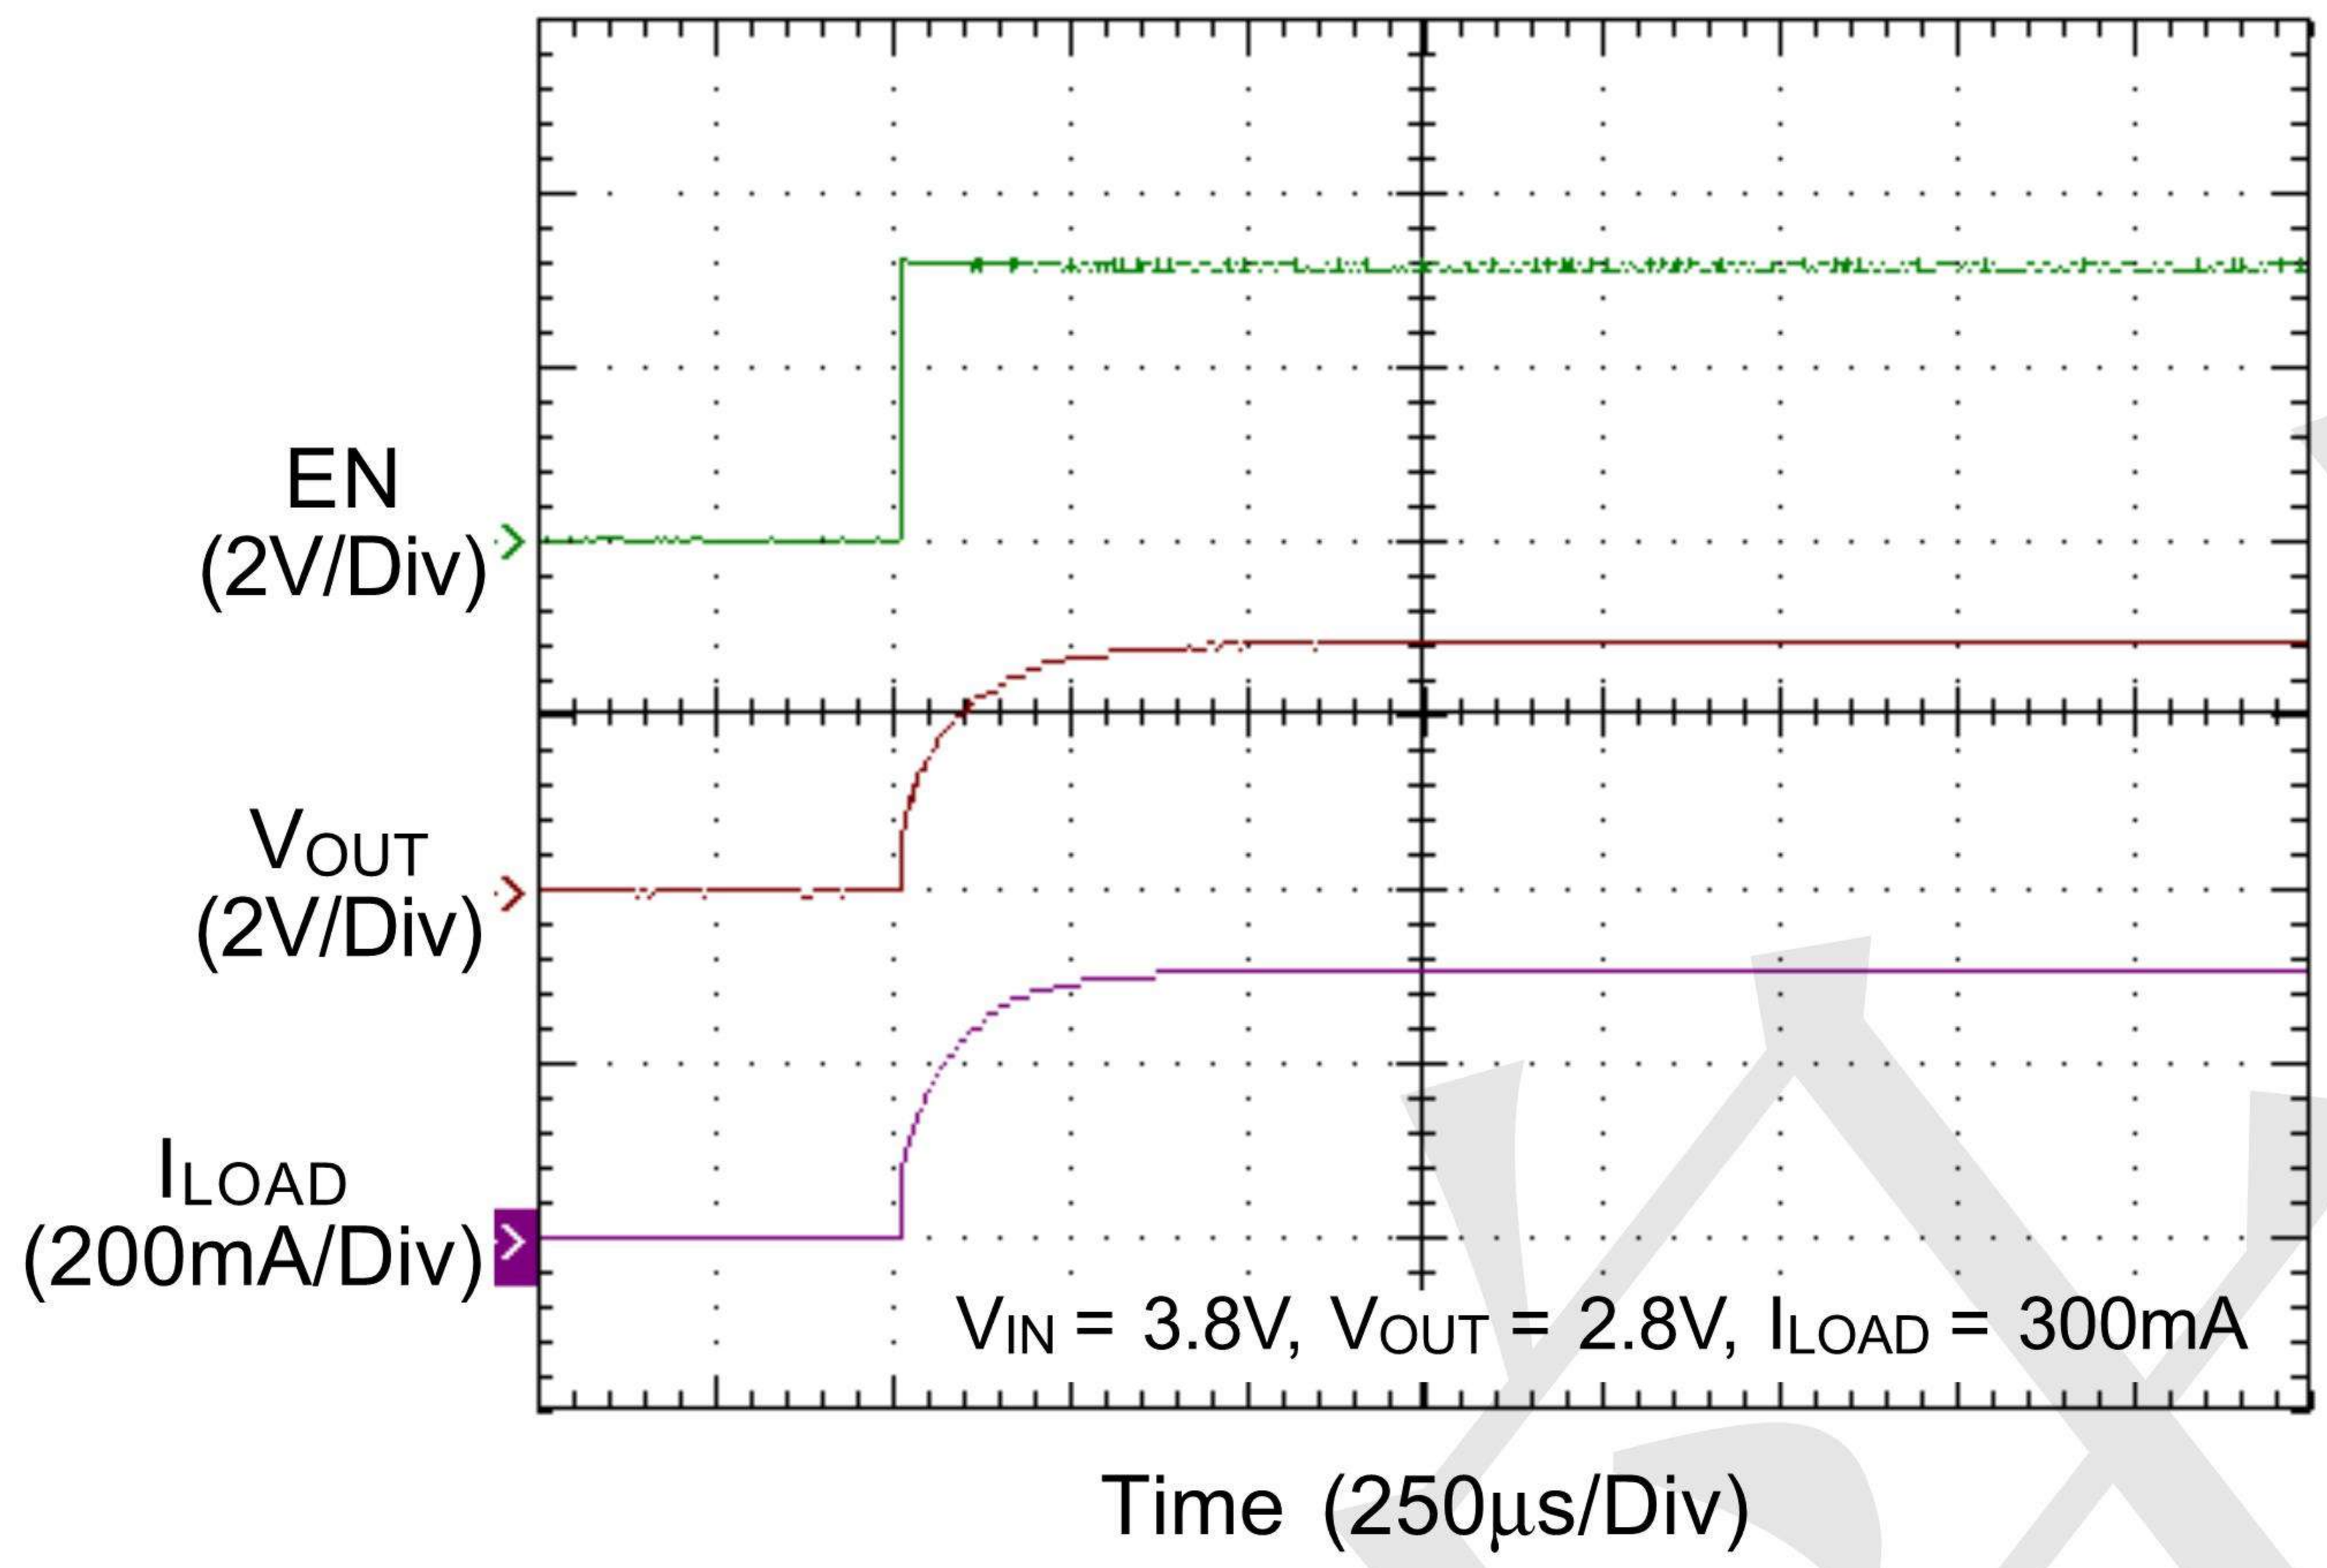

Power Off from EN

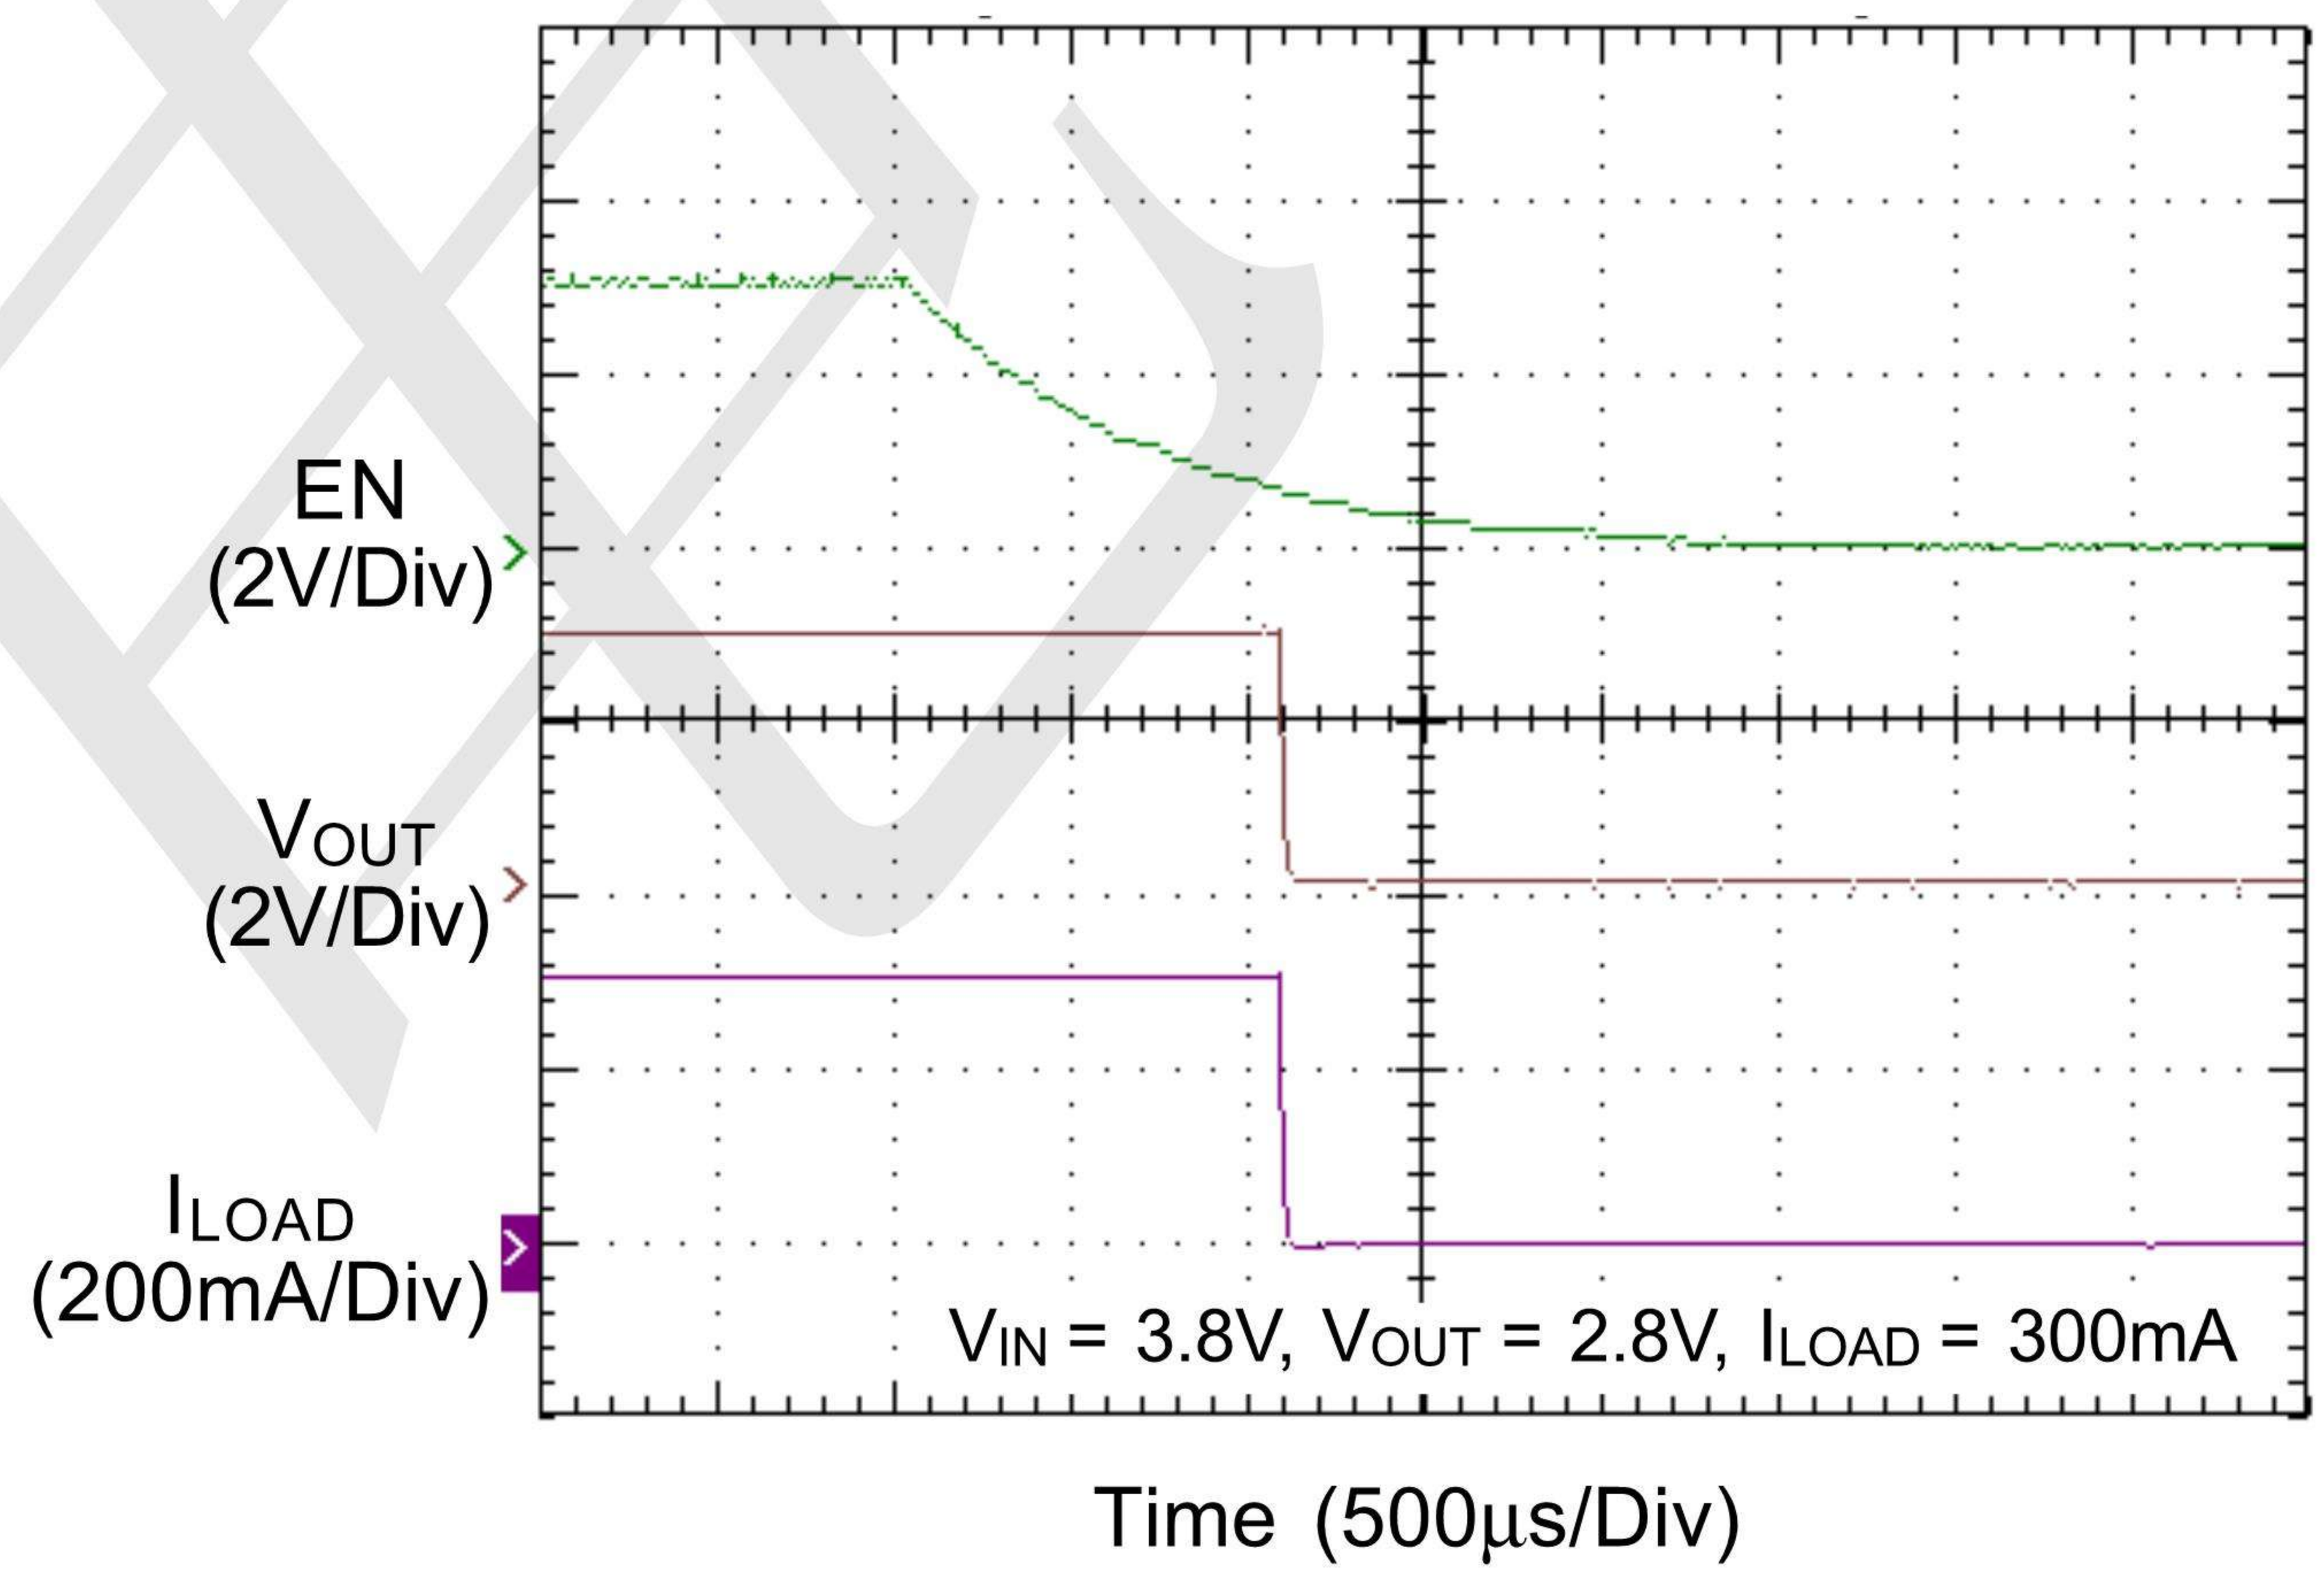

Line Transient

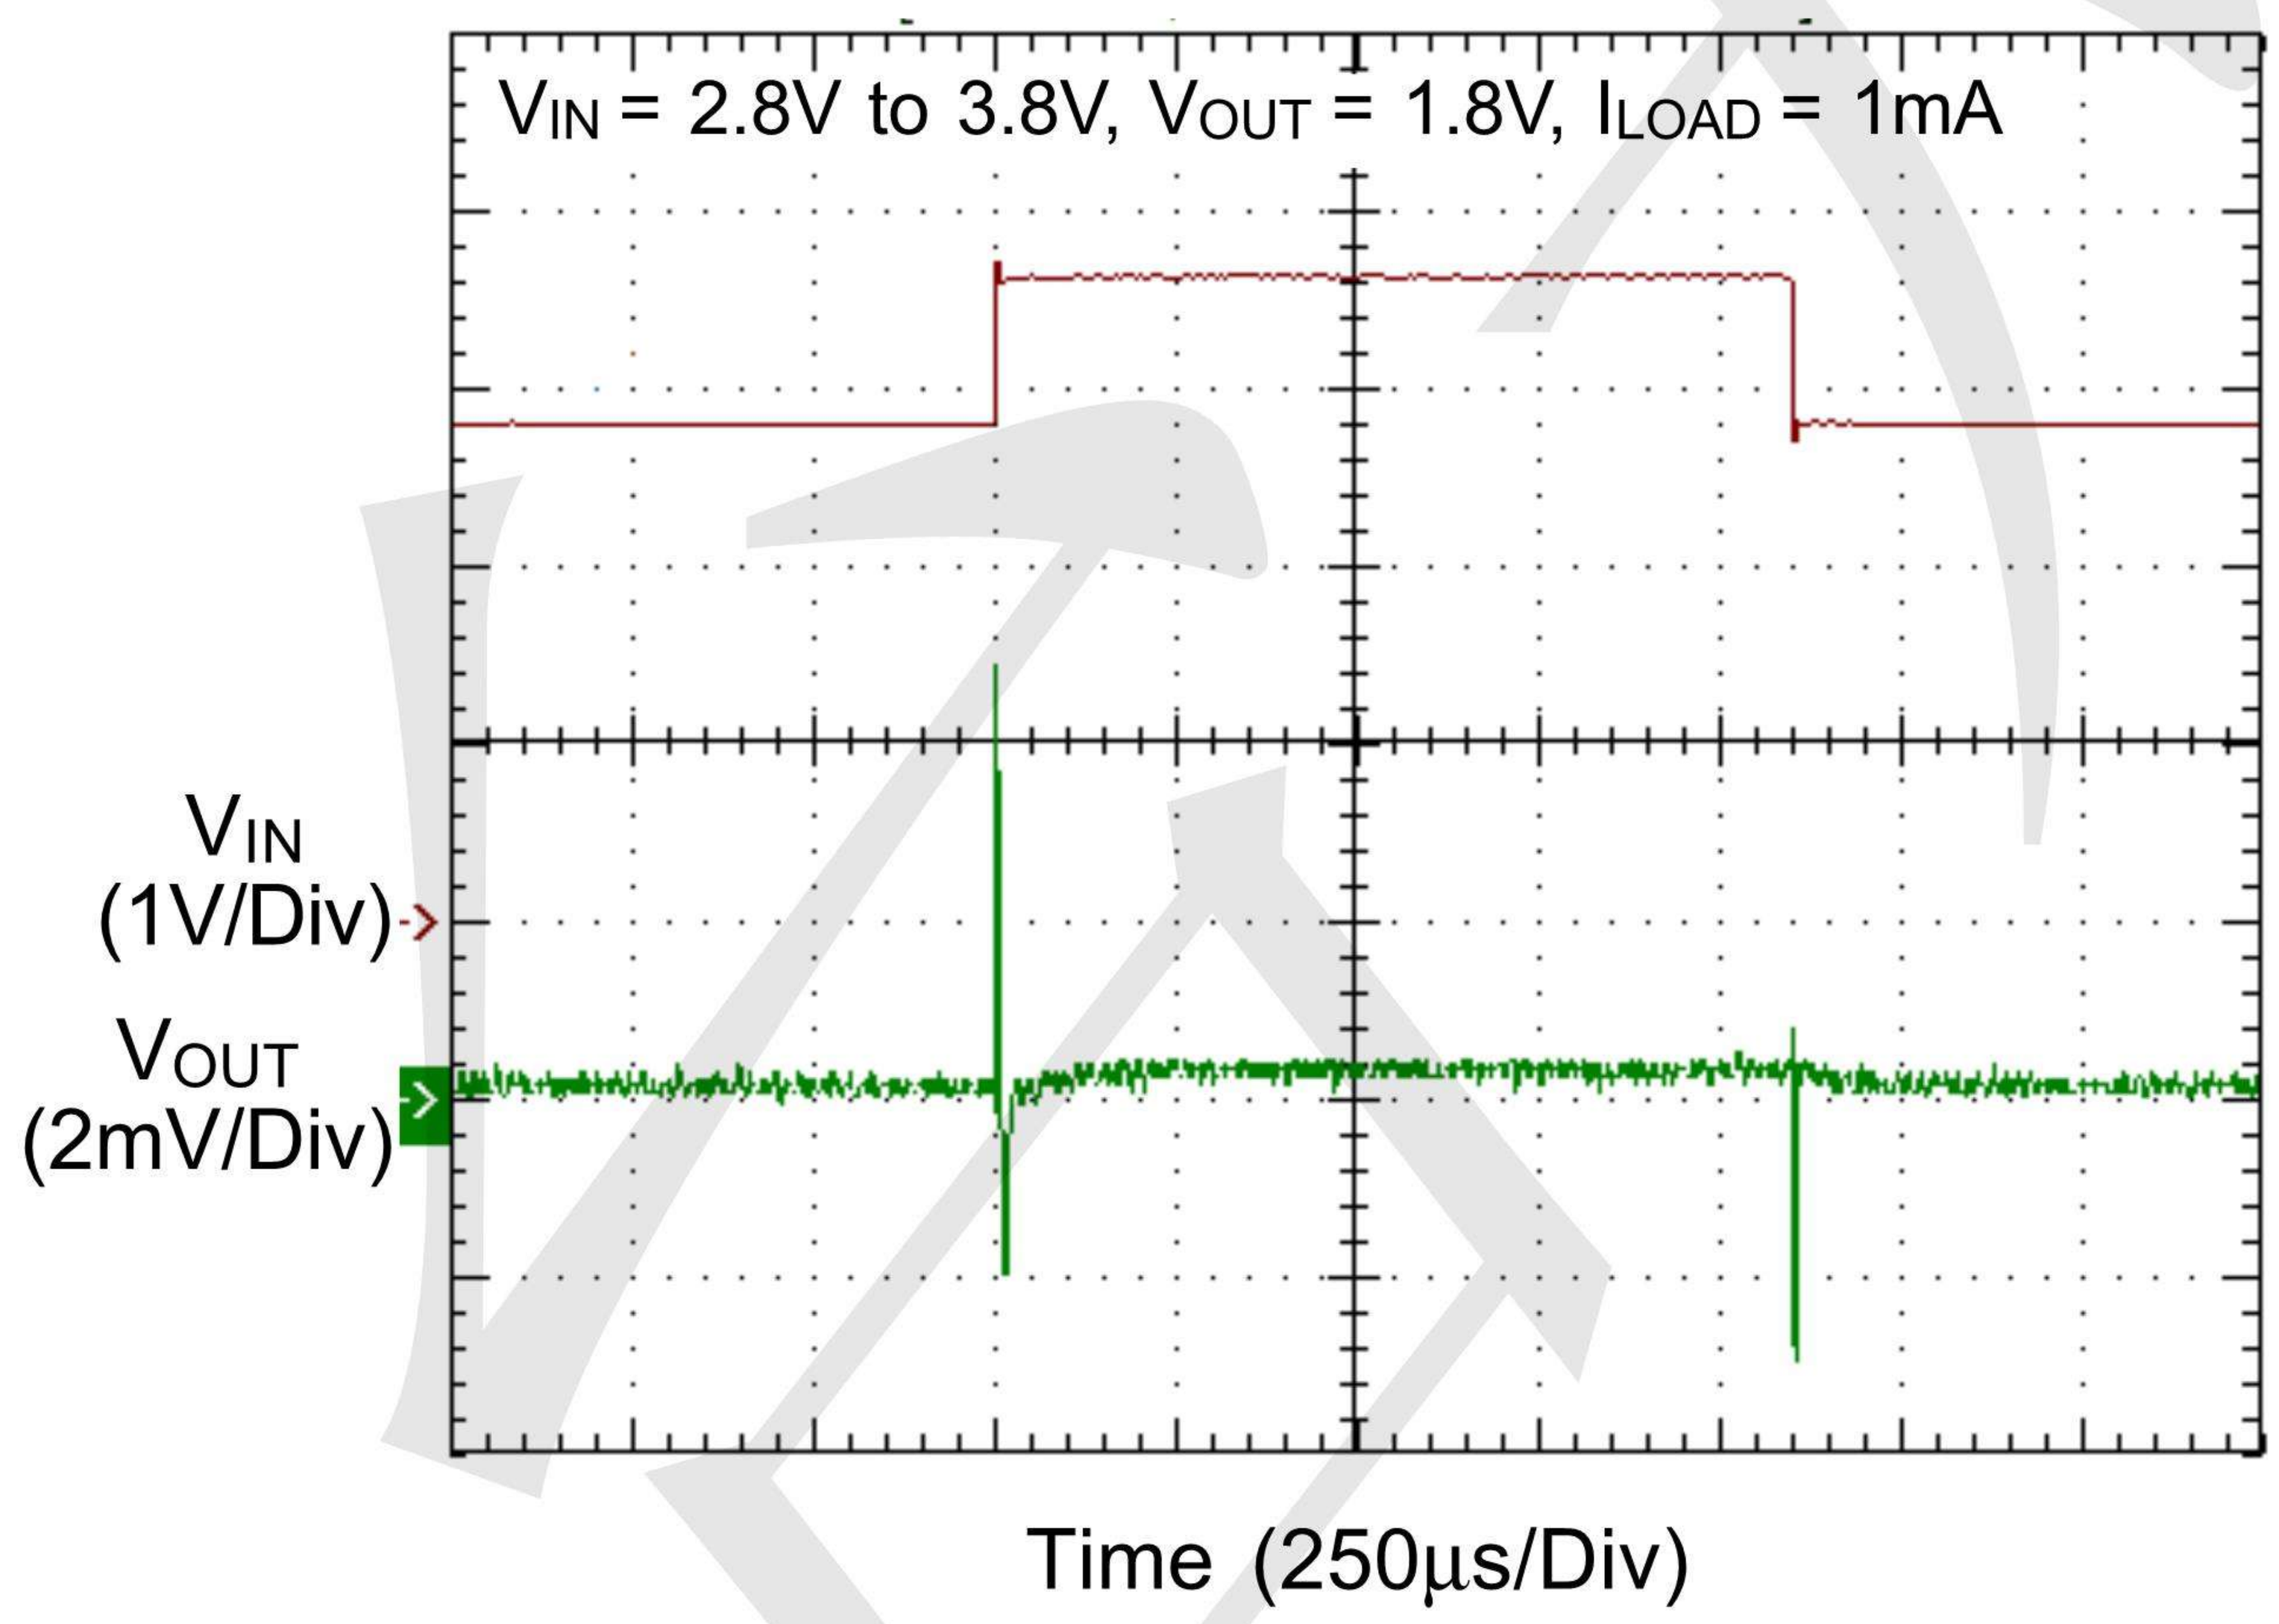

Load Transient

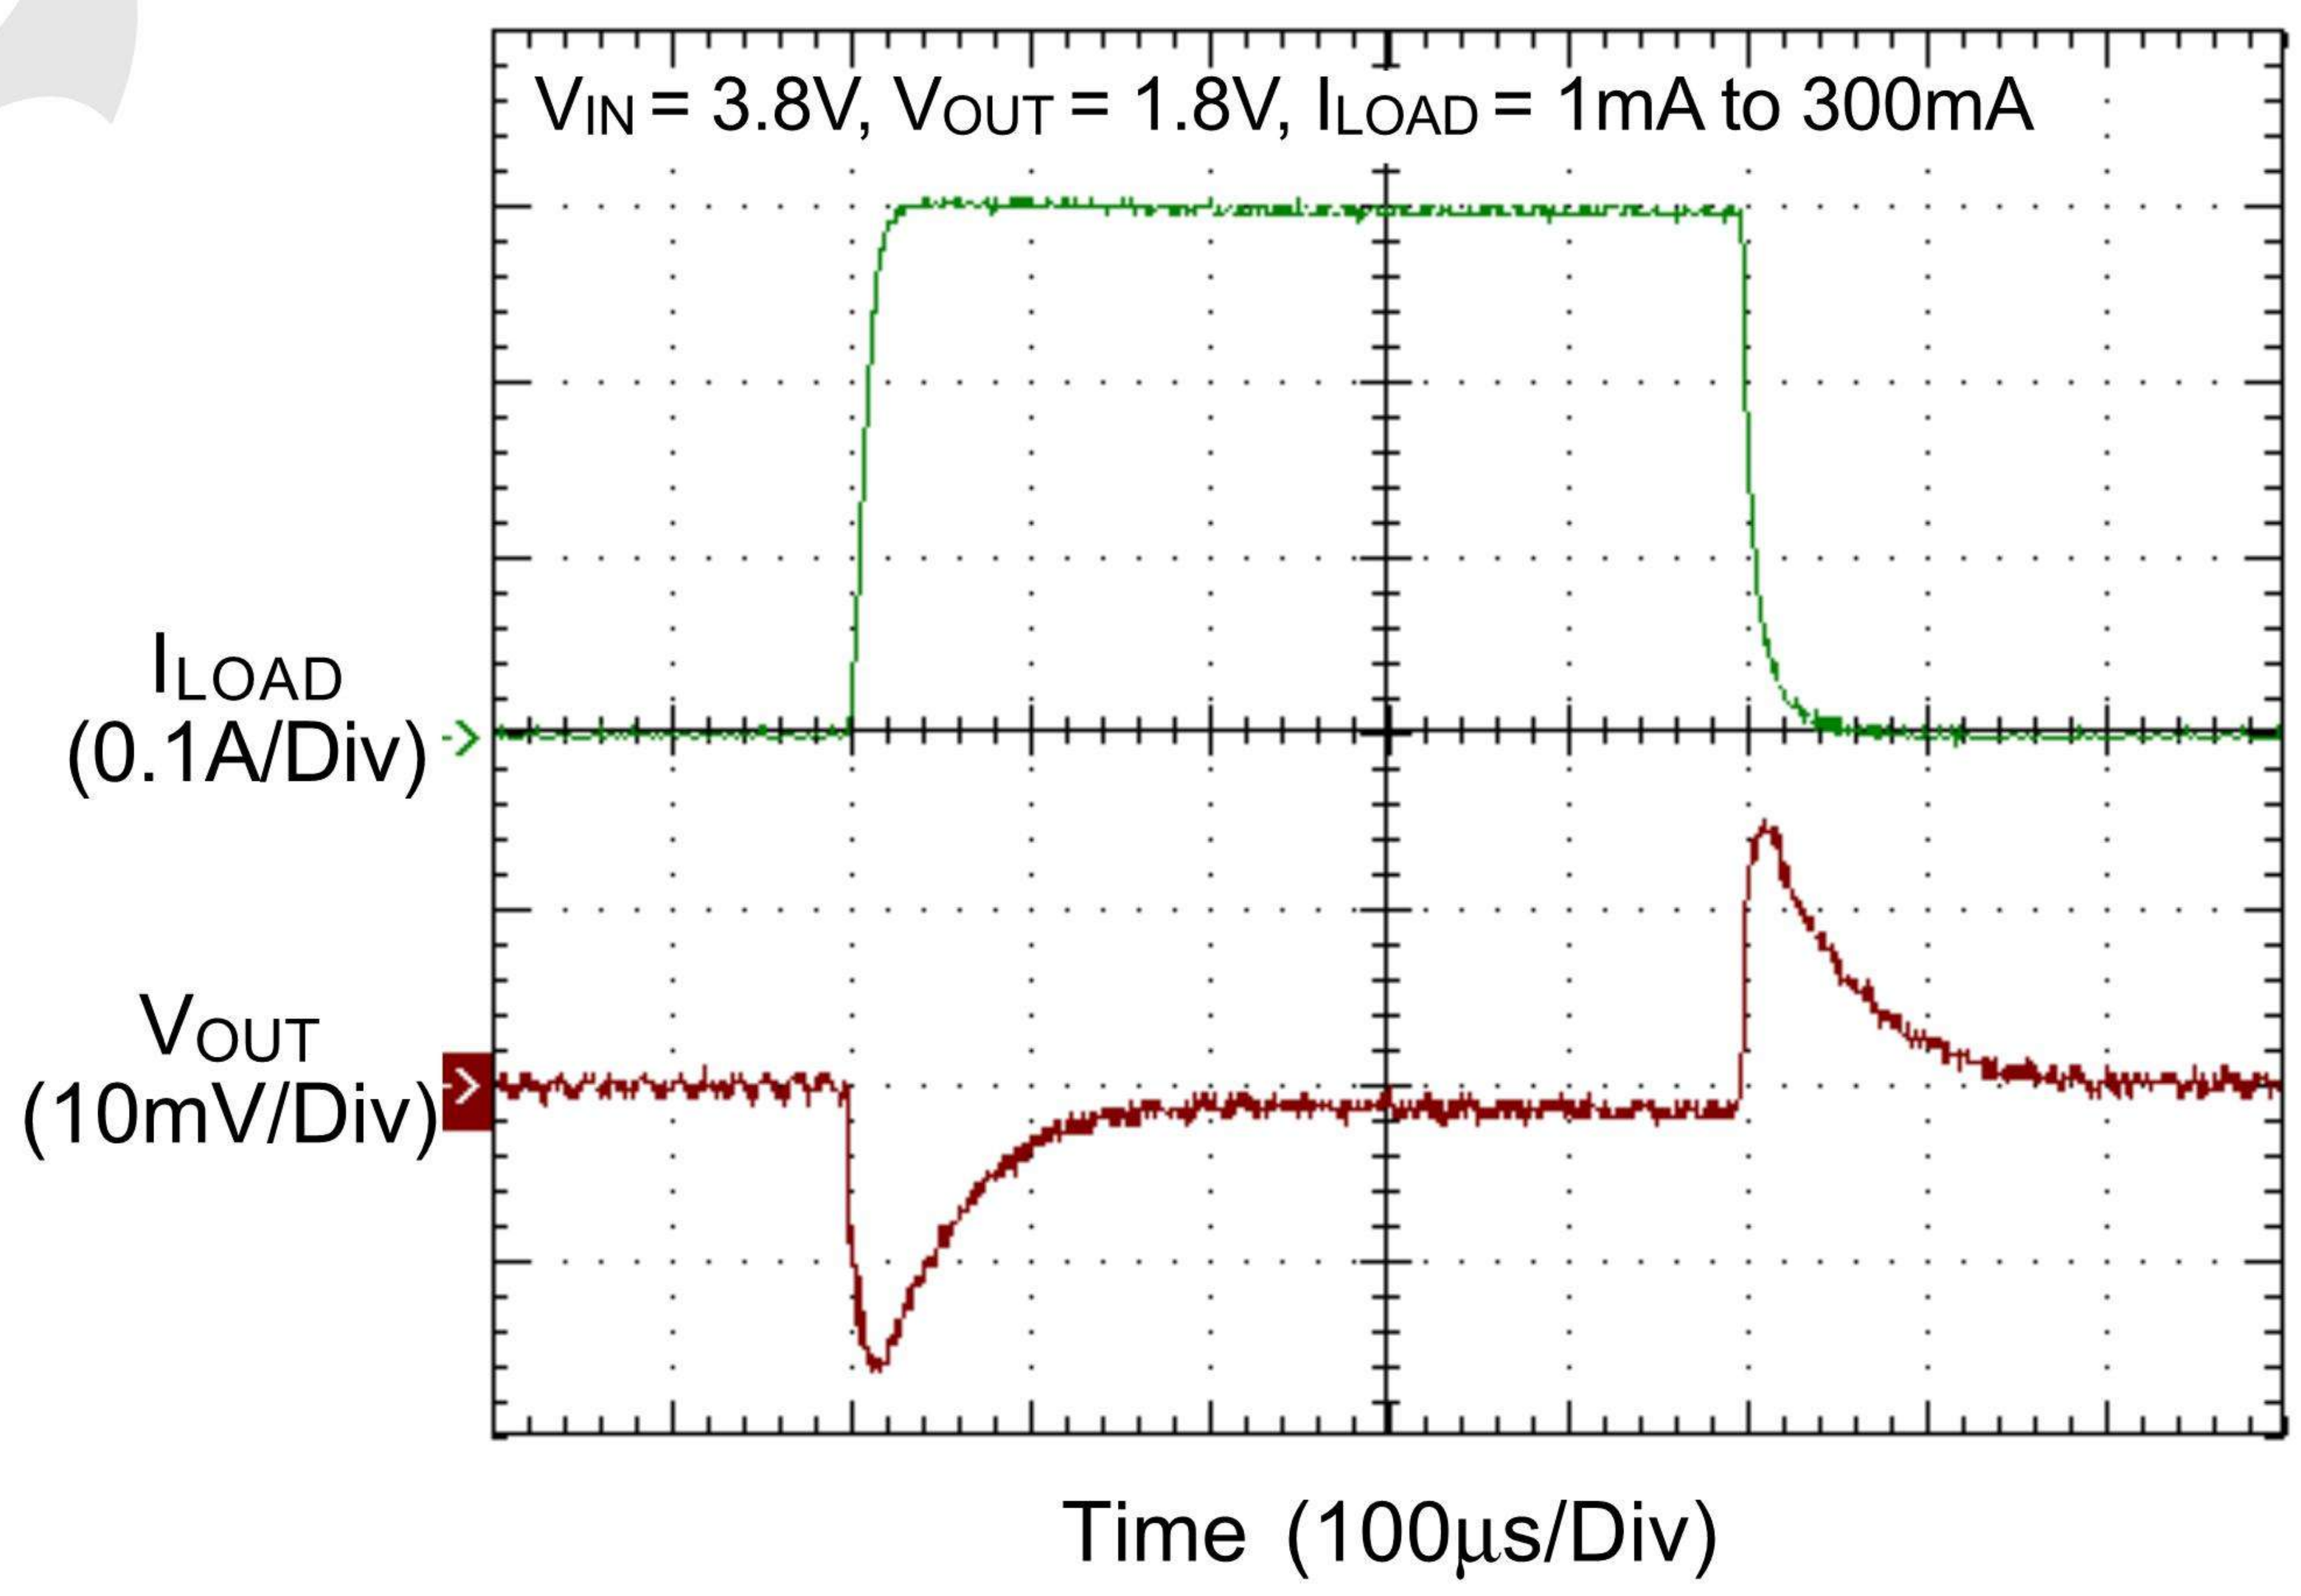

Output Current Limit Protection

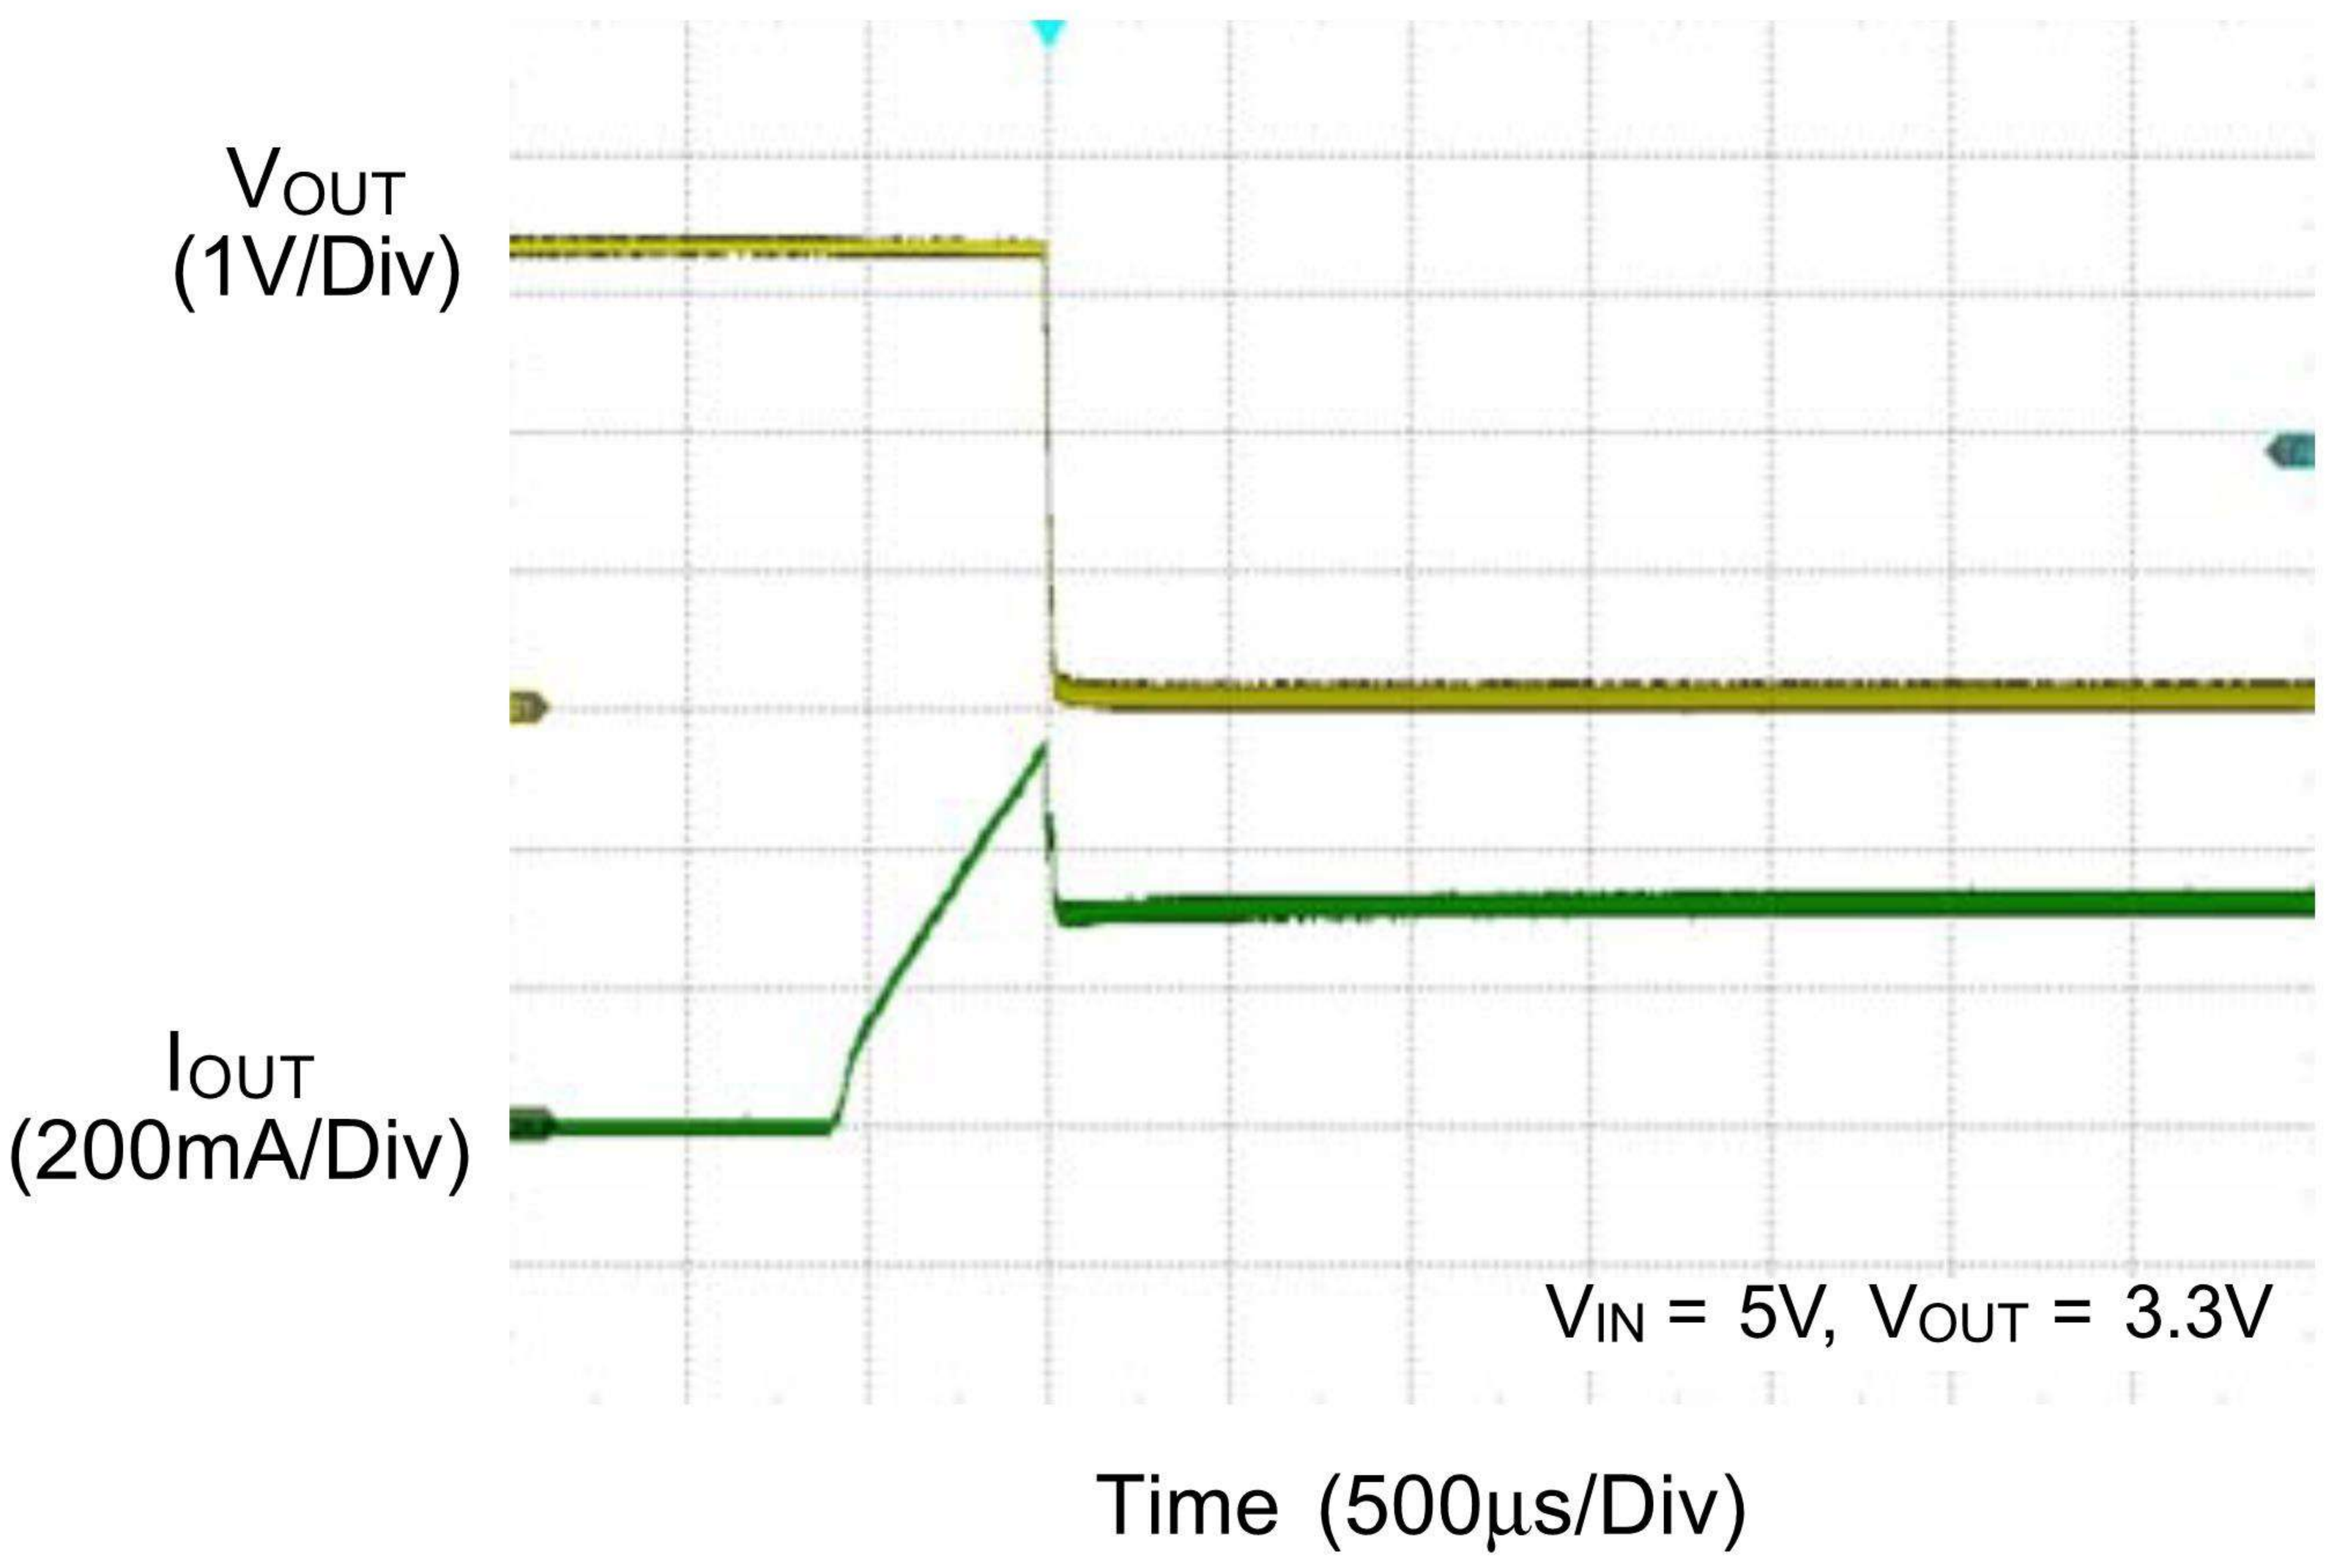

PSRR vs. Frequency

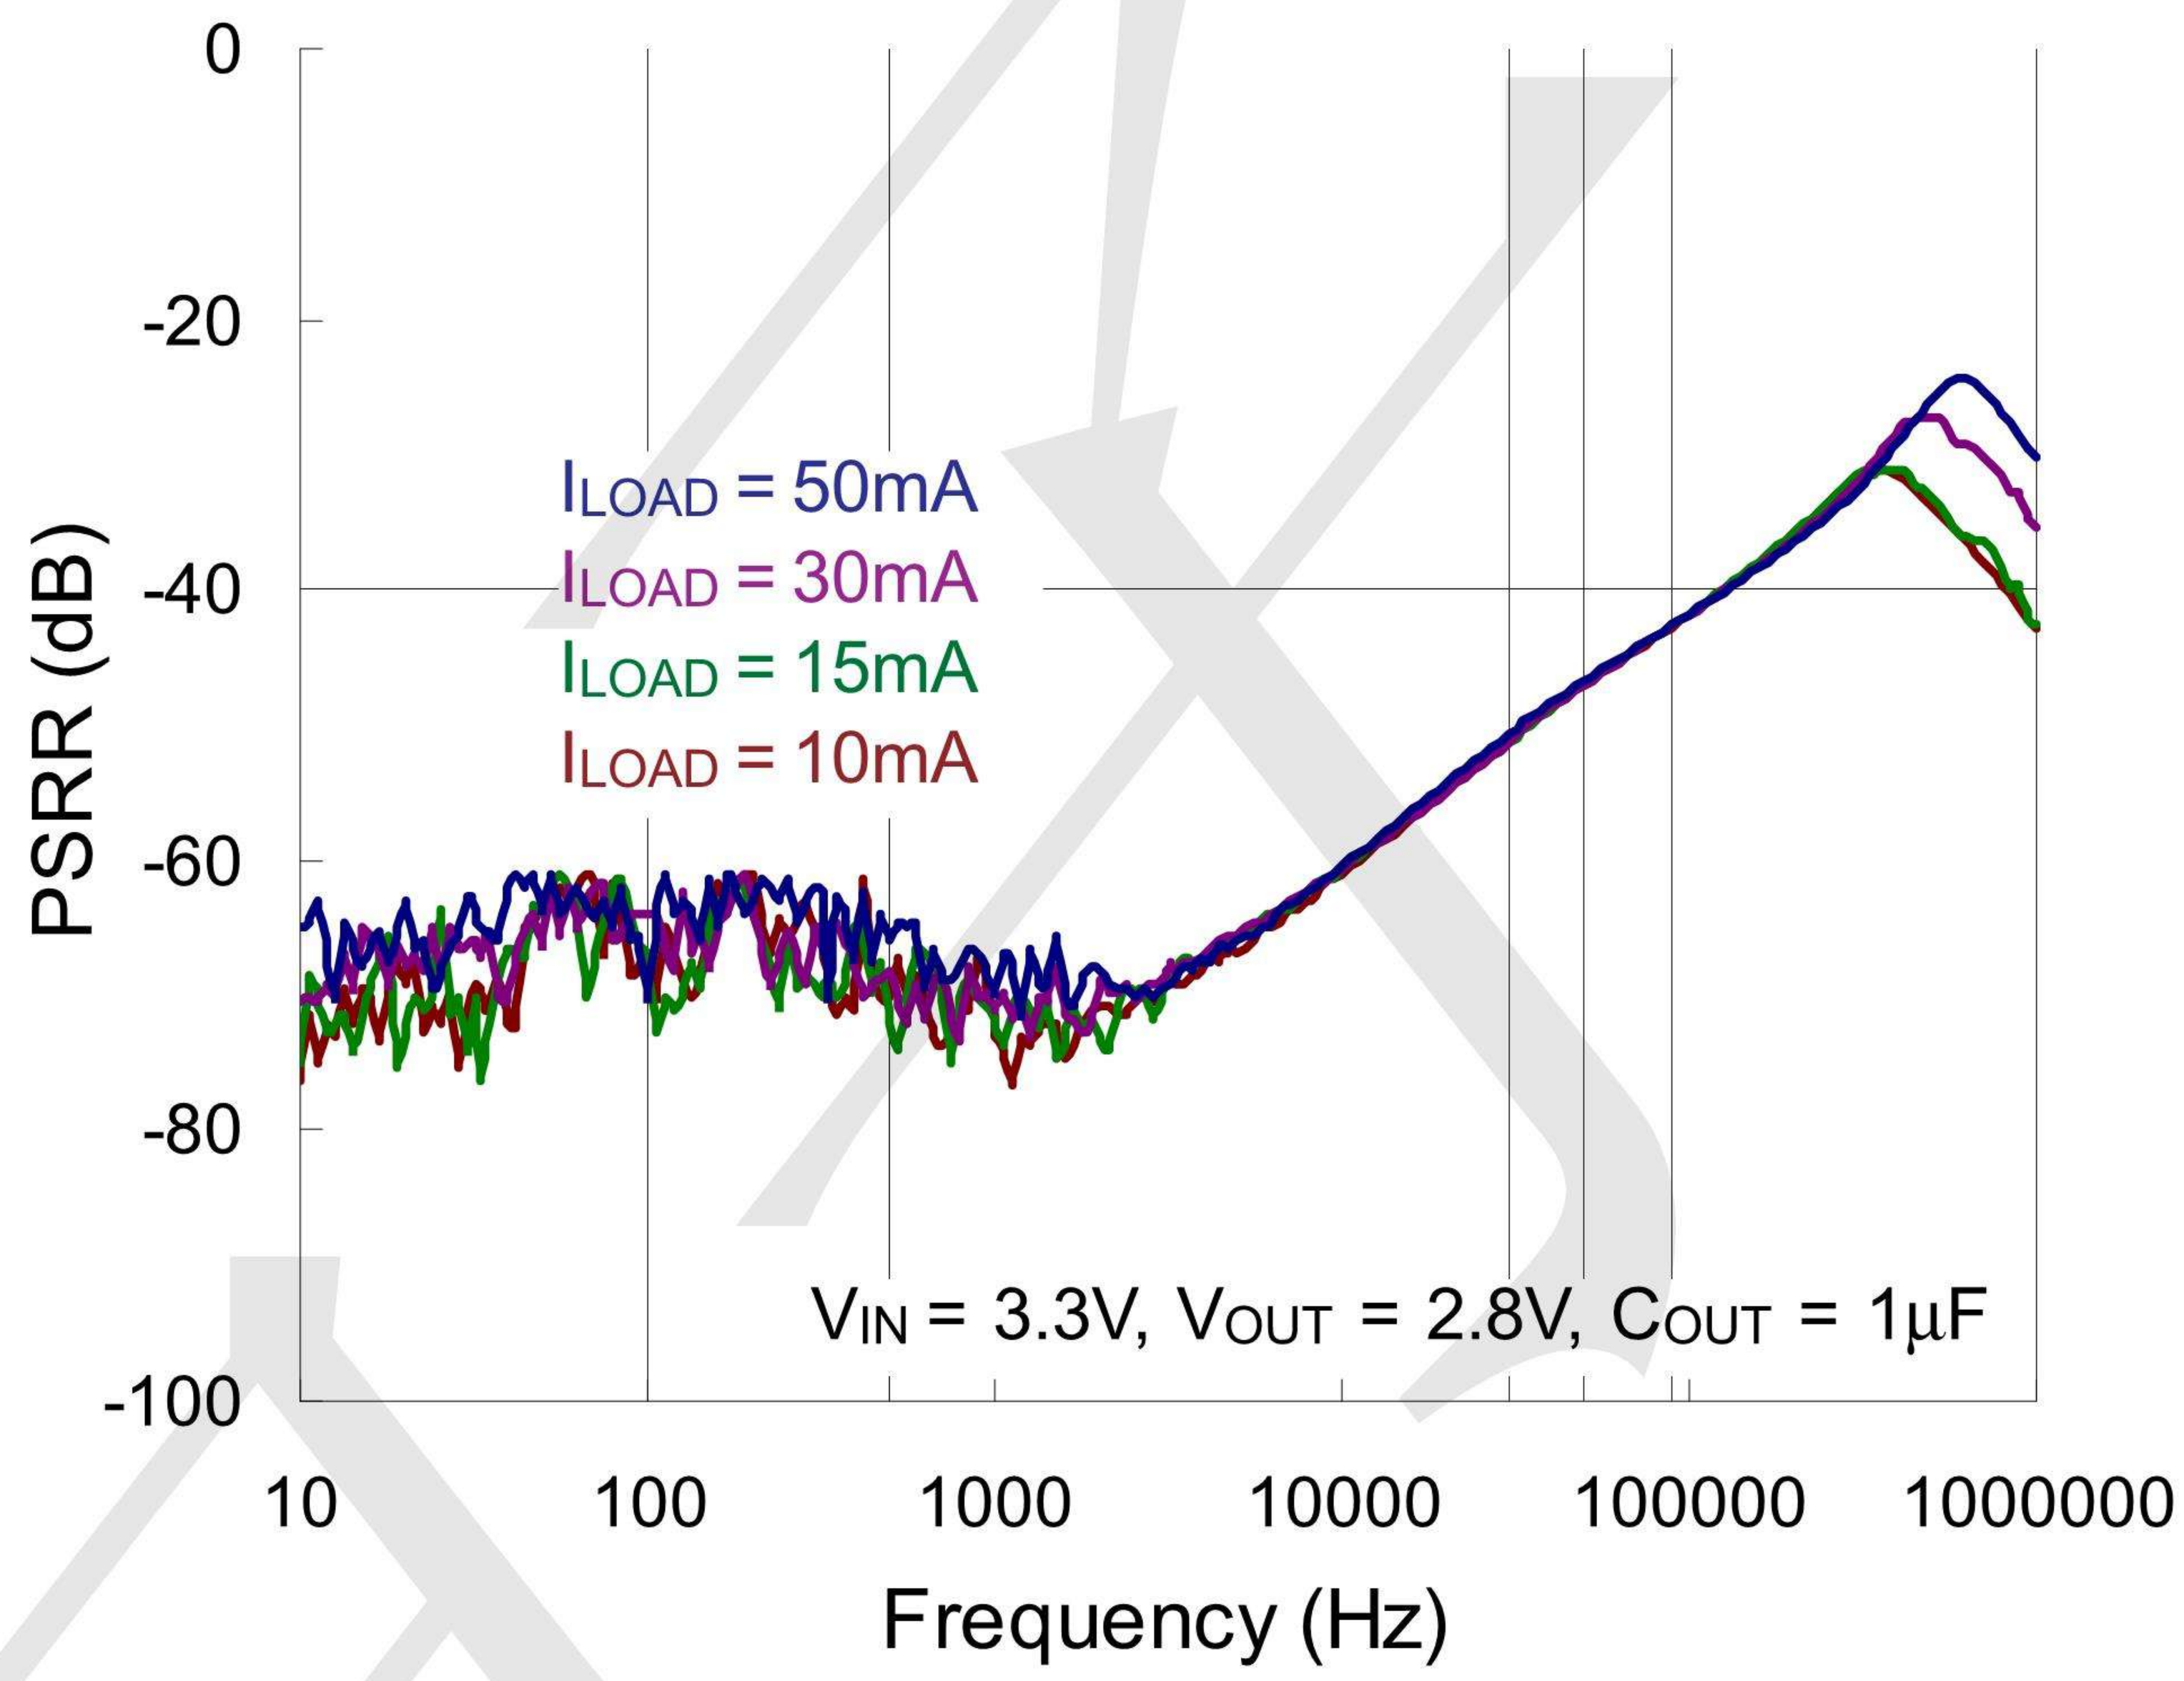

PSRR vs. Frequency

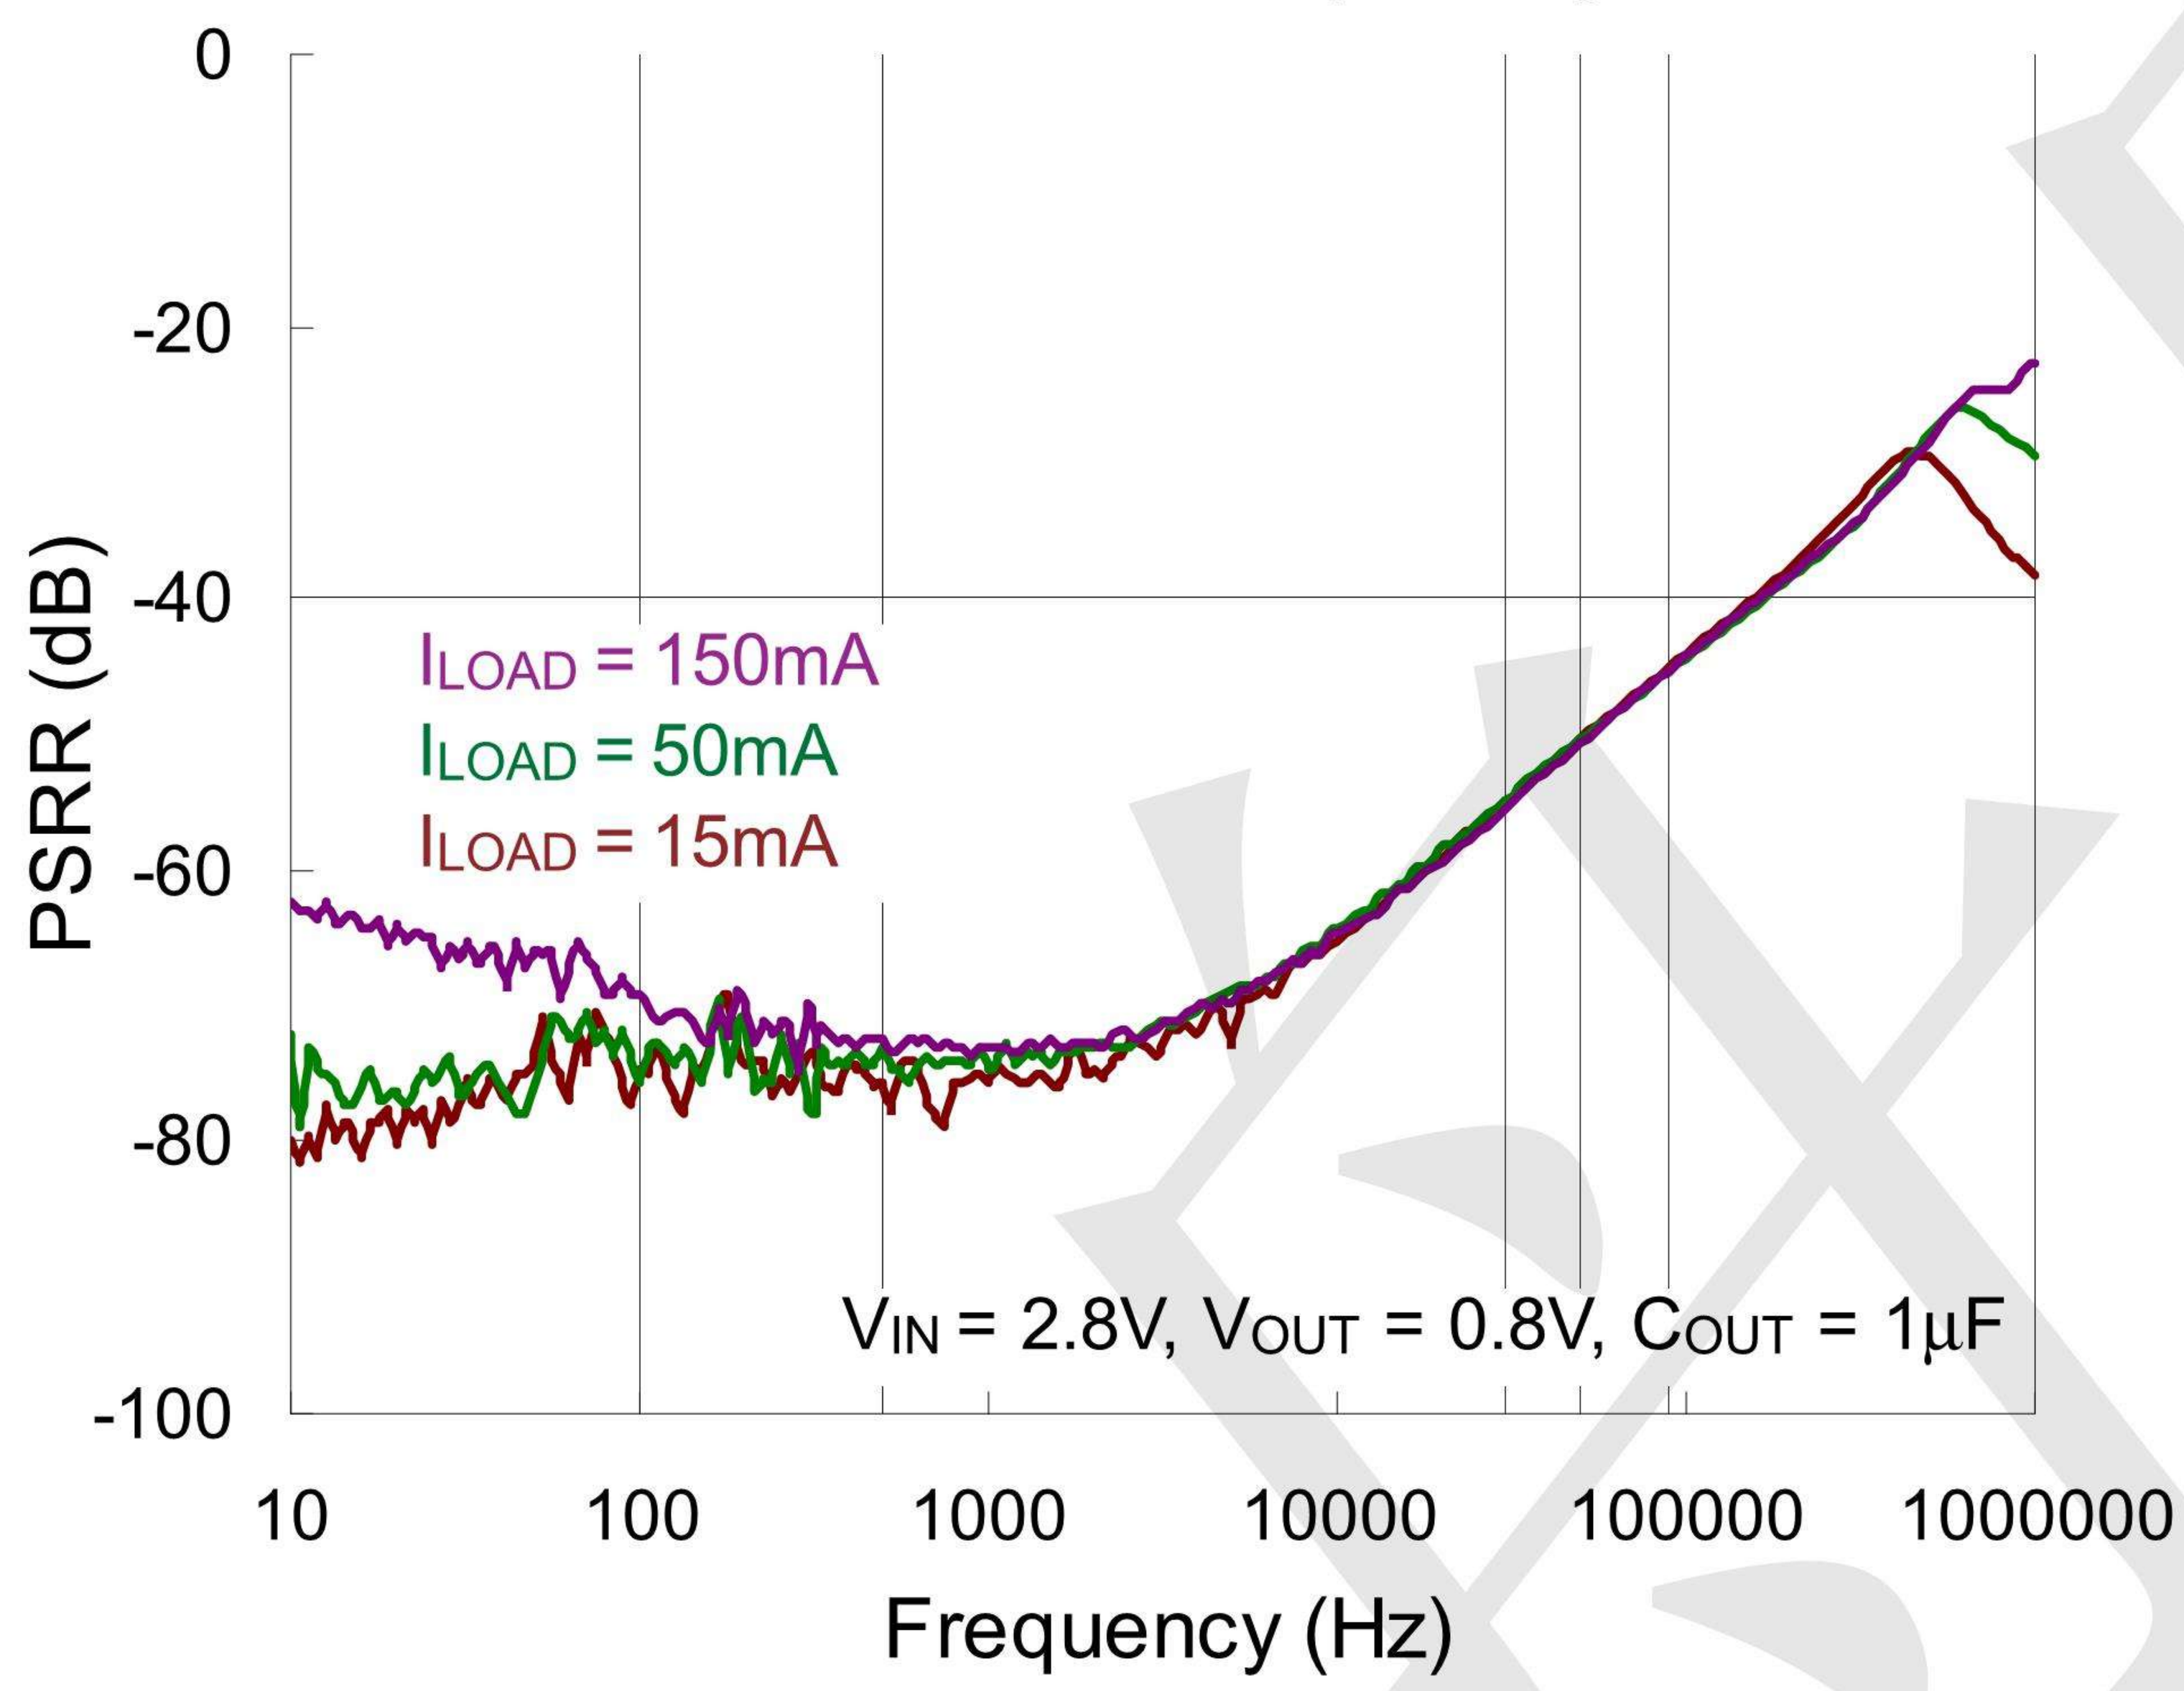

Output Noise vs. Frequency