

# MOSFET - Power, Single N-Channel, SUPERFET® V, FRFET®, Power88 600 V, 61 mΩ, 41 A NTMT061N60S5F

#### Description

The SUPERFET V MOSFET FRFET series, optimized reverse recovery performance of body diode, can remove additional component and improve system reliability for soft switching applications such as PSFB and LLC. The Power88 package which is an ultra–slim SMD package offers excellent switching performance by providing kelvin source configuration and lower parasitic source inductance.

#### **Features**

- 650 V @  $T_J = 150^{\circ}C / Typ. R_{DS(on)} = 48.8 \text{ m}\Omega$
- 100% Avalanche Tested / MSL1 Qualified
- Kelvin Source Configuration and Low Parasitic Source Inductance
- Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### **Applications**

- Computing / Display Power Supplies
- Telecom / Server Power Supplies
- Lighting / Charger/ Adapter / Industrial Power Supplies


### ABSOLUTE MAXIMUM RATINGS (T<sub>J</sub> = 25°C, Unless otherwise noted)

Parameter	Symbol	Value	Unit	
Drain-to-Source Voltage		V <sub>DSS</sub>	600	V
Gate-to-Source Voltage	Gate-to-Source Voltage DC		±30	V
	AC (f > 1 Hz)		±30	
Continuous Drain Current	T <sub>C</sub> = 25°C	I <sub>D</sub>	41	Α
	T <sub>C</sub> = 100°C		25	
Power Dissipation	T <sub>C</sub> = 25°C	$P_{D}$	255	W
Pulsed Drain Current (Note 1)	T <sub>C</sub> = 25°C	I <sub>DM</sub>	146	Α
Pulsed Source Current (Body Diode) (Note 1)	T <sub>C</sub> = 25°C	I <sub>SM</sub>	146	Α
Operating Junction and Storage Temperature Range		T <sub>J</sub> , T <sub>STG</sub>	-55 to +150	°C
Source Current (Body Diode)		Is	41	Α
Single Pulse Avalanche Energy	$I_L = 6.7 \text{ A},$ $R_G = 25 \Omega$	E <sub>AS</sub>	376	mJ
Avalanche Current		I <sub>AS</sub>	6.7	Α
Repetitive Avalanche Energy (Note 1)		E <sub>AR</sub>	2.55	mJ
MOSFET dv/dt		dv/dt	120	V/ns
Peak Diode Recovery dv/dt (Note 2)			70	
Lead Temperature for Soldering Purposes (1/8" from case for 10 seconds)		$T_L$	260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- 1. Repetitive rating: pulse-width limited by maximum junction temperature.
- 2.  $I_{SD} \le 20.5 \text{ A}$ ,  $di/dt \le 200 \text{ A/}\mu\text{s}$ ,  $V_{DD} \le 400 \text{ V}$ , starting  $T_{J} = 25^{\circ}\text{C}$ .

V <sub>DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX	
600 V	61 mΩ @ 10 V	41 A	



**POWER MOSFET** 



TDFN4 8x8 2P CASE 520AB

#### **MARKING DIAGRAM**

NTMT061 N60S5F AWLYWW

NTMT061N60S5F = Specific Device Code A = Assembly Location

WL = Wafer Lot Y = Year WW = Work Week

#### ORDERING INFORMATION

Device	Package	Shipping
NTMT061N60S5F	TDFN4	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.


### THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case, Max.	$R_{ heta JC}$	0.49	°C/W
Thermal Resistance, Junction-to-Ambient, Max.	$R_{\theta JA}$	45	

Parameter	Symbol	Test Conditions	Min	Тур	Max	Unit
OFF CHARACTERISTICS						
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	$V_{GS} = 0 \text{ V, I}_{D} = 1 \text{ mA, T}_{J} = 25^{\circ}\text{C}$	600	_	-	V
Drain-to-Source Breakdown Voltage Temperature Coefficient	$\Delta V_{(BR)DSS}/$ $\Delta T_J$	I <sub>D</sub> = 10 mA, Referenced to 25°C	-	630	=	mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 600 V, T <sub>J</sub> = 25°C	-	_	10	μΑ
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{GS} = \pm 30 \text{ V}, V_{DS} = 0 \text{ V}$	-	_	±100	nA
ON CHARACTERISTICS						
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	$V_{GS} = 10 \text{ V}, I_D = 20.5 \text{ A}, T_J = 25^{\circ}\text{C}$	-	48.8	61	mΩ
Gate Threshold Voltage	V <sub>GS(th)</sub>	$V_{GS} = V_{DS}, I_D = 4.6 \text{ mA}, T_J = 25^{\circ}\text{C}$	3.2	_	4.8	V
Forward Trans-conductance	9FS	V <sub>DS</sub> = 20 V, I <sub>D</sub> = 20.5 A	-	39	-	S
CHARGES, CAPACITANCES & GATE	RESISTANCE					
Input Capacitance	C <sub>ISS</sub>	$V_{DS} = 400 \text{ V}, V_{GS} = 0 \text{ V}, f = 250 \text{ kHz}$	-	4175	-	pF
Output Capacitance	C <sub>OSS</sub>		-	63	-	
Time Related Output Capacitance	C <sub>OSS(tr.)</sub>	$I_D$ = Constant, $V_{DS}$ = 0 V to 400 V, $V_{GS}$ = 0 V	-	963	-	
Energy Related Output Capacitance	C <sub>OSS(er.)</sub>	V <sub>DS</sub> = 0 V to 400 V, V <sub>GS</sub> = 0 V	-	103	_	
Total Gate Charge	Q <sub>G(tot)</sub>	V <sub>DD</sub> = 400 V, I <sub>D</sub> = 20.5 A, V <sub>GS</sub> = 10 V	-	76	-	nC
Gate-to-Source Charge	$Q_{GS}$		-	23	-	
Gate-to-Drain Charge	$Q_{GD}$		-	23	-	
Gate Resistance	$R_{G}$	f = 1 MHz	-	6	-	Ω
SWITCHING CHARACTERISTICS						
Turn-On Delay Time	t <sub>d(on)</sub>	$V_{GS} = 0/10 \text{ V}, V_{DD} = 400 \text{ V},$	-	42	-	ns
Rise Time	t <sub>r</sub>	$I_D = 20.5 \text{ A}, R_G = 4.7 \Omega$	-	15	-	
Turn-Off Delay Time	t <sub>d(off)</sub>		-	108	_	
Fall Time	t <sub>f</sub>		-	2.8	-	
SOURCE-TO-DRAIN DIODE CHARAC	TERISTICS					
Forward Diode Voltage	$V_{SD}$	$V_{GS}$ = 0 V, $I_{SD}$ = 20.5 A, $T_{J}$ = 25°C	-	_	1.2	V
Reverse Recovery Time	t <sub>RR</sub>	$V_{GS} = 0 \text{ V}, I_{SD} = 20.5 \text{ A},$	-	124	_	ns
Reverse Recovery Charge	Q <sub>RR</sub>	dl/dt = 100 A/μs, V <sub>DD</sub> = 400 V	-	717	_	nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### **TYPICAL CHARACTERISTICS**

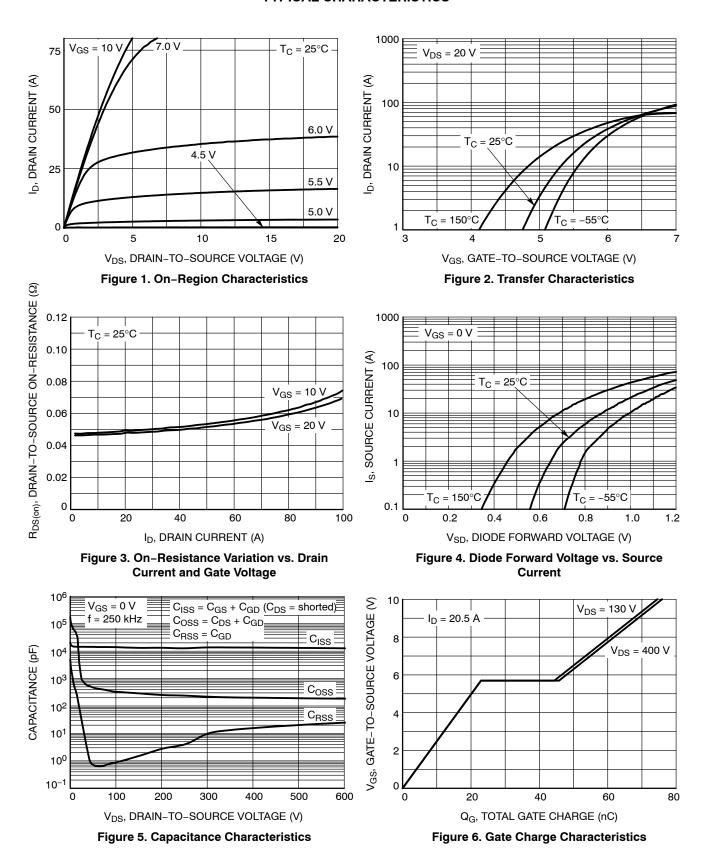

#### **TYPICAL CHARACTERISTICS**

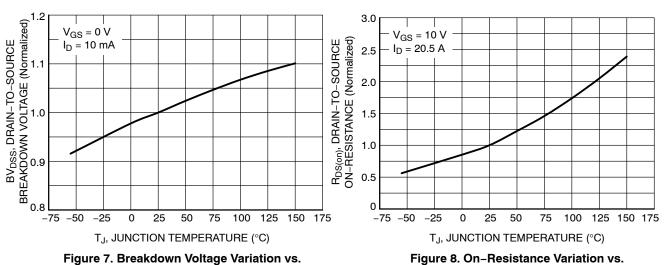


Figure 7. Breakdown Voltage Variation vs. Temperature


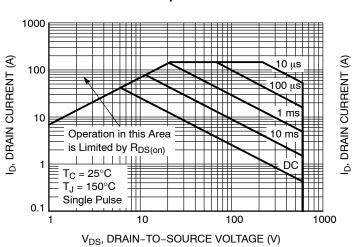


Figure 9. Maximum Safe Operating Area

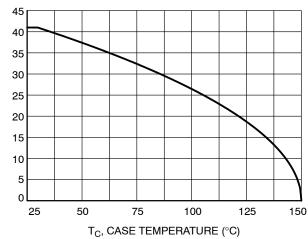

Temperature

Figure 10. Maximum Drain Current vs. Case Temperature

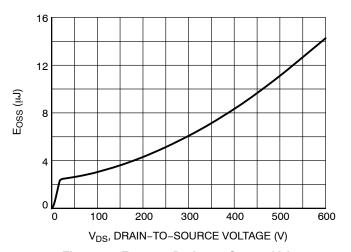


Figure 11. E<sub>OSS</sub> vs. Drain-to-Source Voltage

# **TYPICAL CHARACTERISTICS**

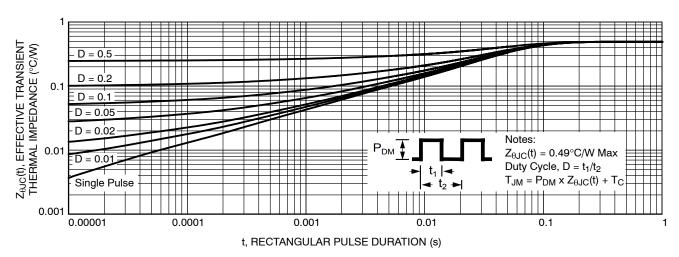


Figure 12. Transient Thermal Impedance

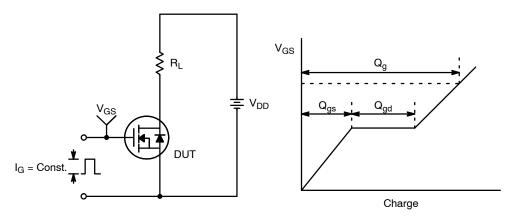


Figure 13. Gate Charge Test Circuit & Waveform

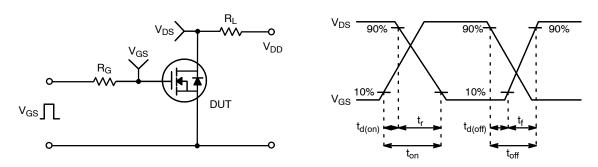


Figure 14. Resistive Switching Test Circuit & Waveforms

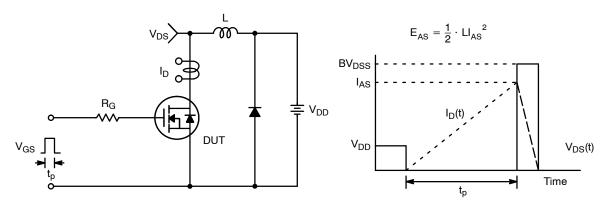


Figure 15. Unclamped Inductive Switching Test Circuit & Waveforms


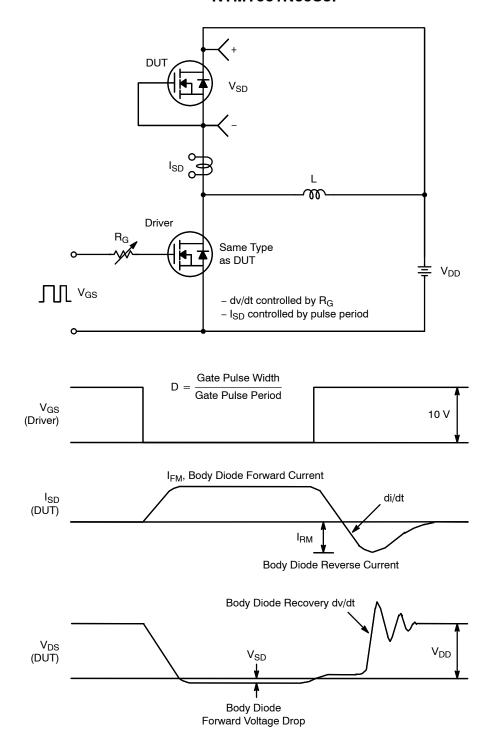


Figure 16. Peak Diode Recovery dv/dt Test Circuit & Waveforms

SUPERFET and FRFET are a registered trademarks of Semiconductor Components Industries, LLC or its subsidiaries in the United States and/or other countries.

#### **PACKAGE DIMENSIONS**

#### TDFN4 8x8, 2P CASE 520AB ISSUE O

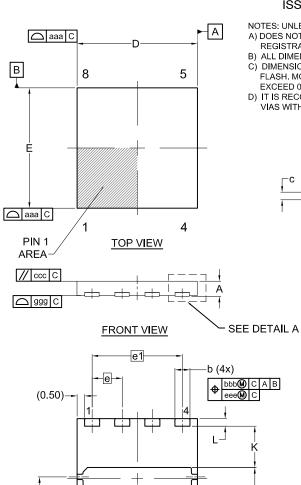

-D1-

ф fff(M) С A В

**BOTTOM VIEW** 


e2

(1.03)


E2

(6x)

- NOTES: UNLESS OTHERWISE SPECIFIED
- A) DOES NOT FULLY CONFORM TO JEDEC REGISTRATION MO-220.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
  C) DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH. MOLD FLASH OR BURRS DOES NOT EXCEED 0.10MM.
- D) IT IS RECOMMENDED TO HAVE NO TRACES OR VIAS WITHIN THE KEEP OUT AREA.



DIM	MILLIMETERS		
Divi	MIN.	NOM.	MAX.
Α	0.90	1.00	1.10
A1	0.00	ı	0.05
b	0.90	1.00	1.10
С	0.10	0.20	0.30
D	7.90	8.00	8.10
D1	7.10	7.20	7.30
Е	7.90	8.00	8.10
E1	4.25	4.35	4.45
E2	0.15	0.25	0.35
е	2.00 BSC		
e1	6.00 BSC		
e2	3.10 BSC		
K	(2.75)		
L	0.40	0.50	0.60
aaa	0.10		
bbb	0.10		
ccc	0.05		
eee	0.05		
fff	0.10		
999	0.15		

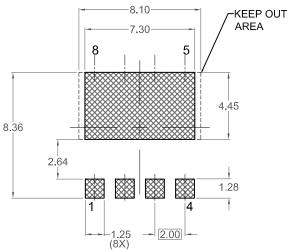

#### RECOMMENDED LAND PATTERN

\*FOR ADDITIONAL INFORMATION ON OUR PB-FREE STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD THE ON SEMICONDUCTOR SOLDERING AND MOUNTING TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

É1

⊕ fffM C A B

(0.40)

(0.40)

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800–282–9855 Toll Free USA/Canada

Europe, Middle East and Africa Technical Support: Phone: 00421 33 790 2910