

G3VM-□CR□/□FR□

MOS FET Relays DIP 8-pin, High-Current and Low-ON-resistance Type


DIP

G3VM-□CR□/□FR□

The highest class load current of MOS FET Relays realized with DIP8 package

- Contact form: 1a (SPST-NO)
- Load voltage: 60 V, 100 V, 200 V, 400 V, or 600 V
- 60-V Relay: Continuous load current of 5 A (10 A) max. *
- 100-V Relay: Continuous load current of 3 A (6 A) max. *
- 200-V Relay: Continuous load current of 1.5 A (3 A) max. *
- 400-V Relay: Continuous load current of 0.4 A (0.8 A) max. *
- 600-V Relay: Continuous load current of 0.6 A (1.2 A) max. *

* Values in parentheses are for connection C.

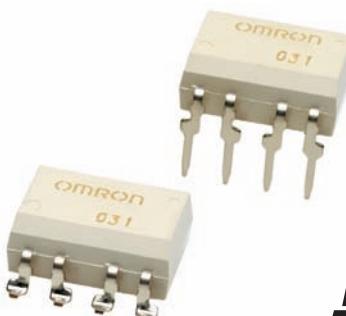

NEW

Note: The actual product is marked differently from the image shown here.

RoHS Compliant


■ Application Examples

- Communication equipment
- Industrial equipment
- Test & Measurement equipment
- Power circuit
- Security equipment


■ Package (Unit : mm, Average)

DIP 8-pin

PCB Terminals

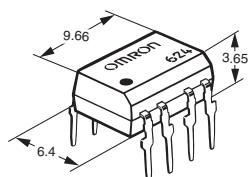

Surface-mounting Terminals



Note: The actual product is marked differently from the image shown here.

■ Model Number Legend

G3VM-□ □ □ □ □
1 2 3 4 5

1. Load Voltage

- 6 : 60 V
- 10 : 100 V
- 20 : 200 V
- 40 : 400 V
- 60 : 600 V

2. Contact form

- 1 : 1a (SPST-NO)

3. Package

- C : DIP 8-pin with PCB terminals
- F : DIP 8-pin with surface-mounting terminals

4. Additional functions

- R: Low ON resistance

5. Other informations

When specifications overlap, serial code is added in the recorded order.

■ Ordering Information

Package	Contact form	Load voltage (peak value) *	Continuous load current (peak value) *	Stick packaging		Tape packaging	
				Model		Minimum package quantity	Model
				PCB Terminals	Surface-mounting Terminals		
DIP8	1a (SPST-NO)	60 V	5 A	G3VM-61CR1	G3VM-61FR1	50 pcs.	G3VM-61FR1(TR05)
		100 V	3 A	G3VM-101CR	G3VM-101FR		G3VM-101FR(TR05)
		200 V	1.5 A	G3VM-201CR	G3VM-201FR		G3VM-201FR(TR05)
		400 V	0.4 A	G3VM-401CR	G3VM-401FR		G3VM-401FR(TR05)
		600 V	0.6 A	G3VM-601CR	G3VM-601FR		G3VM-601FR(TR05)

* The AC peak and DC value are given for the load voltage and continuous load current.


Note: To order tape packaging for Relays with surface-mounting terminals, add "(TR05)" to the end of the model number.

■Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Item	Symbol	G3VM-61CR1 G3VM-61FR1	G3VM-101CR G3VM-101FR	G3VM-201CR G3VM-201FR	G3VM-401CR G3VM-401FR	G3VM-601CR G3VM-601FR	Unit	Measurement conditions
Input	LED forward current	I_F		30			mA	
	Repetitive peak LED forward current	I_{FP}		1			A	100 μs pulses, 100 pps
	LED forward current reduction rate	$\Delta I_F/\text{°C}$		-0.3			mA/°C	$T_a \geq 25^\circ\text{C}$
	LED reverse voltage	V_R		5			V	
	Connection temperature	T_J		125			°C	
Output	Load voltage (AC peak/DC)	V_{OFF}	60	100	200	400	600	V
	Continuous load current	I_O	5	3	1.5	0.4	0.6	A Connection A: AC peak/DC Connection B and C: DC
			5	3	1.5	0.4	0.6	
			10	6	3	0.8	1.2	
	ON current reduction rate	$\Delta I_O/\text{°C}$	-50	-30	-15	-4	-6	mA/°C $T_a \geq 25^\circ\text{C}$
			-50	-30	-15	-4	-6	
			-100	-60	-30	-8	-12	
	Pulse ON current	I_{OP}	15	9	4.5	1.2	1.8	A $t=100\text{ ms}, \text{Duty}=1/10$
	Connection temperature	T_J		125			°C	
	Dielectric strength between I/O *	V_{I-O}		2,500			Vrms	AC for 1 min
Ambient operating temperature	T_a	-40 to +85		-40 to +110		-40 to +85	°C	With no icing or condensation
	Ambient storage temperature	T_{STG}			-55 to +125		°C	
	Soldering temperature	-		260			°C	10 s

* The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

Connection Diagram

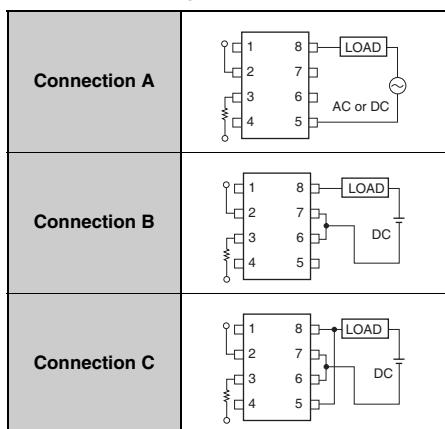

■Electrical Characteristics ($T_a = 25^\circ\text{C}$)

Item		Symbol		G3VM-61CR1 G3VM-61FR1	G3VM-101CR G3VM-101FR	G3VM-201CR G3VM-201FR	G3VM-401CR G3VM-401FR	G3VM-601CR G3VM-601FR	Unit	Measurement conditions			
Indul	LED forward voltage	V _F	Minimum			1.5				V	I _F =10 mA		
			Typical			1.64							
			Maximum			1.8							
Reverse current	I _R	Maximum			10				μA	V _R =5 V			
Capacitance between terminals	C _T	Typical			70				pF	V=0, f=1MHz			
			IFT	Typical	0.28	0.3	0.3	0.2		G3VM-61CR1/FR1 : I _O =1 A			
Trigger LED forward current		Maximum		5	5	5	1	5	mA	G3VM-101CR/FR : I _O =1 A			
		IFC	Typical	0.28	0.3	0.3	0.2	G3VM-201CR/FR : I _O =1 A					
Release LED forward current			Maximum		5	5	5	1	5	mA		G3VM-401CR/FR : I _O =0.4 A	
		IFC	Typical	0.19	-	-	0.19	G3VM-601CR/FR : I _O =0.6 A					
Output	Connection A	R _{ON}	Typical	0.022	0.06	0.25	3	1.3	Ω	G3VM-61CR1/FR1 : I _O =1 A, I _F =5 mA, t < 1 s			
			Maximum	0.05	0.15	0.5	5	2		G3VM-101CR/FR : I _O =1 A, I _F =5 mA, t < 1 s			
Maximum resistance with output ON	Connection B		Maximum	0.025	0.075	0.25	2.5	1	Ω	G3VM-201CR/FR : I _O =1 A, I _F =5 mA, t < 1 s			
			Maximum	0.013	0.038	0.125	1.3	0.5		G3VM-401CR/FR : I _O =0.4 A, I _F =2 mA, t < 1 s			
Current leakage when the relay is open	I _{LEAK}	Typical	0.01	0.02	0.1	0.001	0.05	μA	G3VM-601CR/FR : I _O =0.6 A, I _F =2 mA, t < 1 s				
			Maximum	10	1	1	1	10	G3VM-61CR1/FR1 : I _O =1 A, I _F =2 mA, t < 1 s				
Capacitance between terminals	C _{OFF}	Typical	850	720	400	410	4,300	pF	G3VM-101CR/FR : I _O =1 A, I _F =5 mA, t < 1 s				
			Maximum	10 ⁸	10 ⁸	10 ⁸	10 ⁸		G3VM-201CR/FR : I _O =1 A, I _F =5 mA, t < 1 s				
Capacitance between I/O terminals	C _{i-o}	Typical			0.8				pF	f=1 MHz, Vs=0 V			
Insulation resistance between I/O terminals	R _{i-o}	Minimum			1,000				$\text{M}\Omega$	Vs=500 VDC, RoH≤60%			
		Typical			10 ⁸								
Turn-ON time	t _{ON}	Typical	2.5	1.5	0.25	0.22	0.8	ms					
		Maximum	5	5	1	1	3		I _F =5 mA, R _L =200 Ω , V _{DD} =20 V *				
Turn-OFF time	t _{OFF}	Typical			0.1		0.08		ms				
		Maximum			1								

* Turn-ON and Turn-OFF Times



■Recommended Operating Conditions

For usage with high reliability, Recommended Operation Conditions is a measure that takes into account the derating of Absolute Maximum Ratings and Electrical Characteristics.

Each item on this list is an independent condition, so it is not simultaneously satisfy several conditions.


Item	Symbol		G3VM-61CR1 G3VM-61FR1	G3VM-101CR G3VM-101FR	G3VM-201CR G3VM-201FR	G3VM-401CR G3VM-401FR	G3VM-601CR G3VM-601FR	Unit
Load voltage (AC peak/DC)	V _{DD}	Maximum	48	80	160	320	480	V
Operating LED forward current	I _F	Typical	5	5	5	2	5	mA
		Maximum			25			
Continuous load current (AC peak/DC)	I _O	Maximum	5	3	1.5	0.4	0.6	A
Ambient operating temperature	Ta	Minimum			-40			
		Maximum			85		°C	

■Spacing and Insulation

Item	Minimum	Unit
Creepage distances	7.0	
Clearance distances	7.0	mm
Internal insulation thickness	0.4	


■Engineering Data

● LED forward current vs.
Ambient temperature

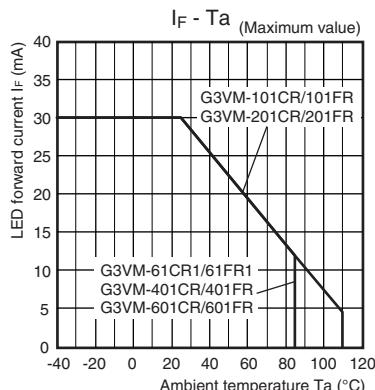


● Continuous load current vs.
Ambient temperature


G3VM-61CR1/61FR1
G3VM-101CR/101FR/201CR/201FR

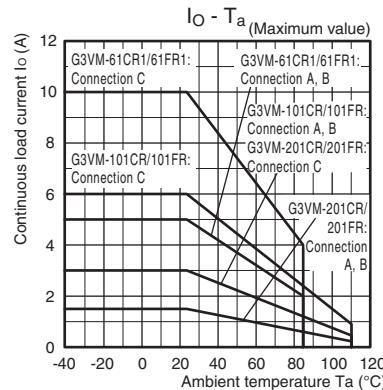

G3VM-401CR/401FR/601CR/601FR

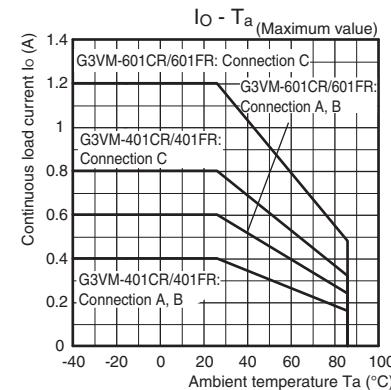


● LED forward current vs.
LED forward voltage

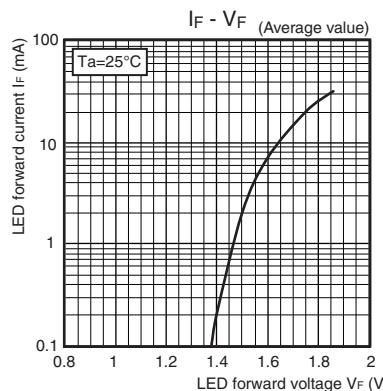


● Continuous load current vs.
On-state voltage

G3VM-61CR1/61FR1
G3VM-101CR/101FR/201CR/201FR

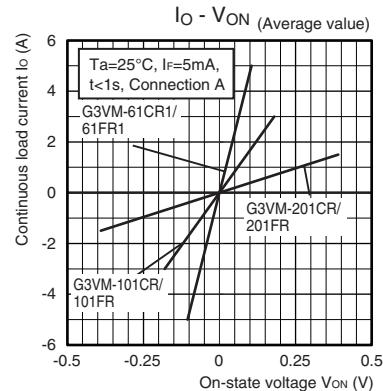


G3VM-401CR/401FR/601CR/601FR

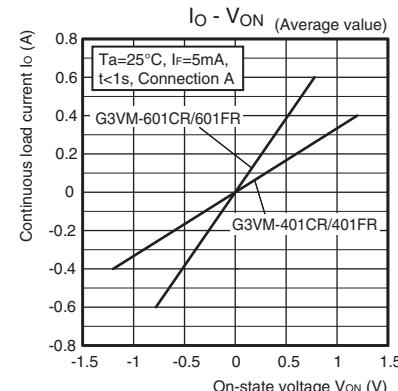


● On-state resistance vs.
Ambient temperature


G3VM-61CR1/61FR1
G3VM-101CR/101FR/201CR/201FR

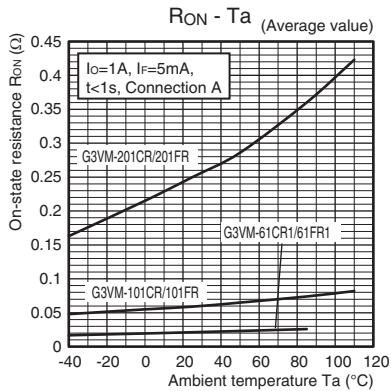

G3VM-401CR/401FR/601CR/601FR

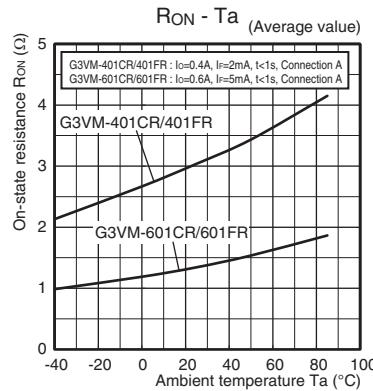

● Trigger LED forward current vs.
Ambient temperature

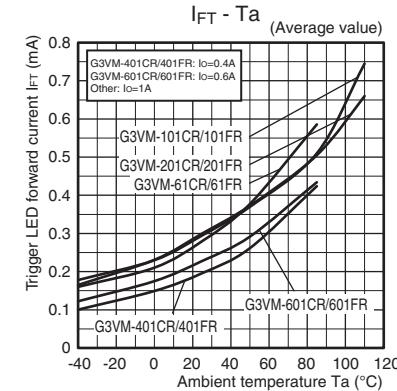



■Engineering Data

● Turn ON, Turn OFF time vs. LED forward current

G3VM-61CR1/61FR1

G3VM-101CR/101FR/201CR/201FR



G3VM-401CR/401FR/601CR/601FR

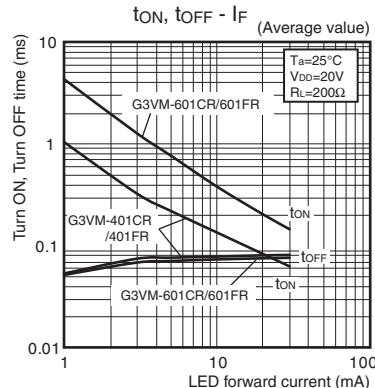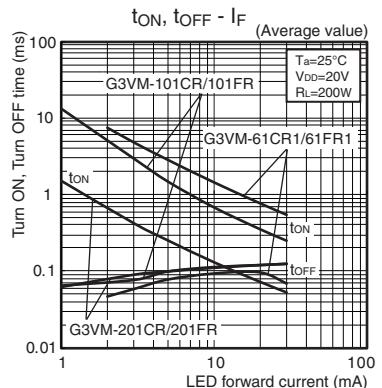


● Turn ON, Turn OFF time vs. Ambient temperature

G3VM-61CR1/61FR1

G3VM-101CR/101FR/201CR/201FR

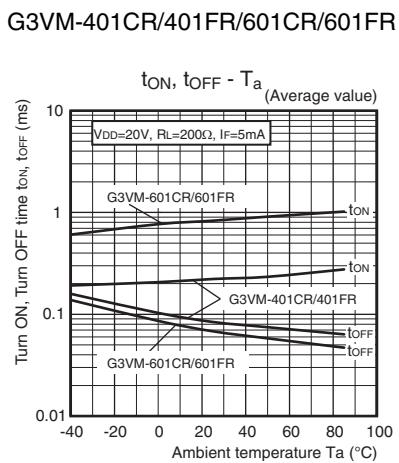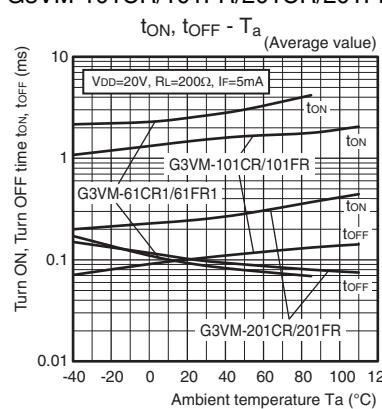

● Current leakage vs. Ambient temperature

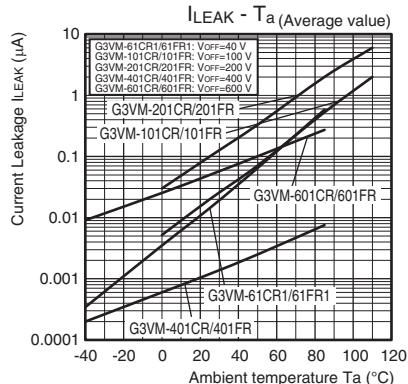


■Appearance / Terminal Arrangement / Internal Connections


● Appearance

DIP (Dual Inline Package)

DIP 8-pin

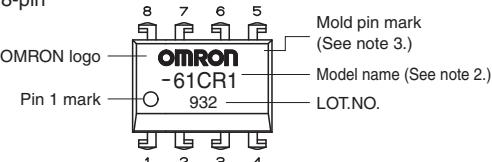

● Terminal Arrangement/Internal Connections (Top View)

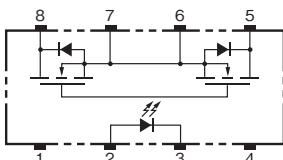

Note: 1. The actual product is marked differently from the image shown here.

Note: 2. "G3VM" does not appear in the model number on the Relay.

Note: 3. The indentation in the corner diagonally opposite from the pin 1 mark is from a pin on the mold.


■Dimensions (Unit: mm)

DIP 8-pin




PCB Terminals

Weight: 0.54 g

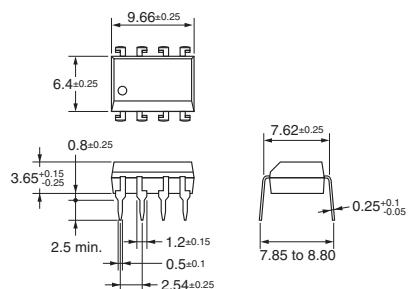


Surface-mounting Terminals

Weight: 0.54 g

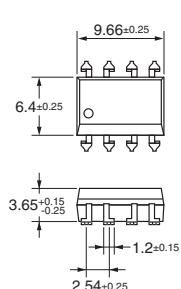


PCB Dimensions (BOTTOM VIEW)

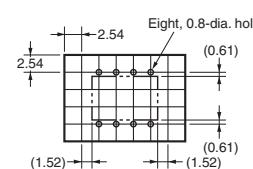

Actual Mounting Pad Dimensions

(Recommended Value, Top View)



Note: The actual product is marked differently from the image shown here.

■Approved Standards

UL recognized

Model	Approved Standards	Contact form	File No.
G3VM-61CR1 G3VM-61FR1			
G3VM-101CR G3VM-101FR			
G3VM-201CR G3VM-201FR	UL (recognized)	1a (SPST-NO)	E80555
G3VM-401CR G3VM-401FR			
G3VM-601CR G3VM-601FR			

■Safety Precautions

- Refer to the *Common Precautions for All MOS FET Relays* for precautions that apply to all MOS FET Relays.

Please check each region's Terms & Conditions by region website.

OMRON Corporation
Electronic and Mechanical Components Company

Regional Contact

Americas

<https://www.components.omron.com/>

Asia-Pacific

<https://ecb.omron.com.sg/>

Korea

<https://www.omron-ecb.co.kr/>

Europe

<http://components.omron.eu/>

China

<https://www.ecb.omron.com.cn/>

Japan

<https://www.omron.co.jp/ecb/>