

Top View LEDs

45-21UNC/3335475/TR8

Features

- Top View White LEDs
- Lead frame package with individual 2 pins
- Wide viewing angle
- Soldering methods: IR reflow soldering
- Pb-free
- The product itself will remain within RoHS compliant version.



Descriptions

• Due to the package design, 45-21 has wide viewing angle, low power consumption and white LEDs are devices which are materialized by combing blue chips and special phosphor. This feature makes the LED ideal for light guide application.

Applications

- LCD back light
- Mobile phones
- Indicators
- Illuminations
- Switch Lights

Device Selection Guide

Chip Material	Emitted Color	Resin Color	
InGaN	White	Water Clear	

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 1 of 12


Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi





Top View LEDs


45-21UNC/3335475/TR8

Package Outline Dimensions





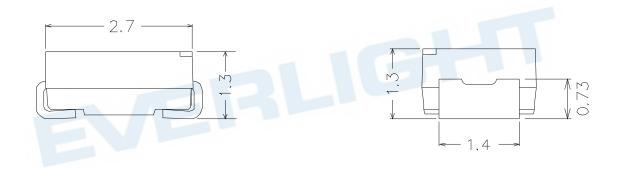

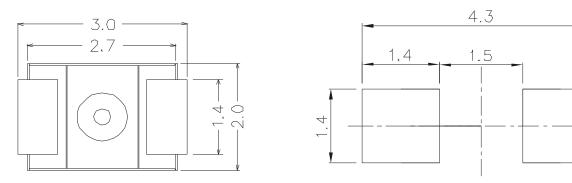

Recommended soldering pad design

Note: Tolerances unless dimension are ± 0.1 mm, unit = mm.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 2 of 12

Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8

Absolute Maximum Ratings (Ta=25°C)

Parameter Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	30	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)*1	ESD	1000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\! \mathbb{C}$
Storage Temperature	Tstg	- 40 ∼ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering: 260 °C for 10 sec. Hand Soldering: 350 °C for 3 sec.	

Note: The products are sensitive to static electricity and must be carefully taken when handling products.

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	I_{V}	1750		1900	mcd	I _F =20mA
Viewing Angle	$2\theta_{1/2}$		120		deg	I _F =20mA
Forward Voltage	V_{F}	2.9		3.4	V	I _F =20mA
Reverse Current	I_R			50	μ A	V _R =5V

Notes:

1. Tolerance of Luminous Intensity: ±11%

2. Tolerance of Forward Voltage: $\pm 0.05 V$

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 3 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8

Bin Range of Luminous Intensity

Bin Code	Min.	Max.	Unit	Condition
33	1750	1800		
34	1800	1850	mcd	I _F =20mA
35	1850	1900		

Note: Tolerance of Luminous Intensity: ±11%

Bin Range of Forward Voltage

Group	Bin Code	Min.	Max.	Unit	Condition	
E	5-2-3	2.9	3.0			
	6-1-3	3.0	3.1		I _F =20mA	
	6-2-3	3.1	3.2	V		
	7-1-3	3.2	3.3			
	7-2-3	3.3	3.4			

Note: Tolerance of Forward Voltage: ± 0.05 V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 4 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8

Bin Range of Chromaticity Coordinates

Group	Bin Code	CIE_x	CIE_y	Bin Code	CIE_x	CIE_y
	B6-1	0.309	0.3045	B6-2	0.3195	0.3165
		0.307	0.315		0.3185	0.327
		0.3185	0.327		0.33	0.339
47		0.3195	0.3165		0.33	0.3285
47	B6-3	0.311	0.294	B6-4	0.3205	0.306
		0.309	0.3045		0.3195	0.3165
		0.3195	0.3165		0.33	0.3285
		0.3205	0.306		0.33	0.318

Note: Tolerance of Chromaticity Coordinates: ±0.01


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 5 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8

The C.I.E. 1931 Chromaticity Diagram

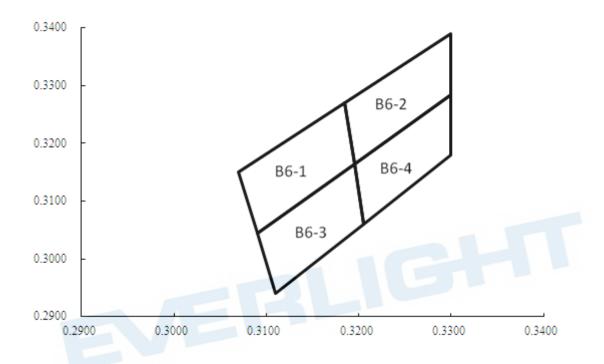


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 6 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi





Top View LEDs


45-21UNC/3335475/TR8


Typical Electro-Optical Characteristics Curves














Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 7 of 12

Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8


Label Explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates

REF: Forward Voltage Rank



Reel Dimensions

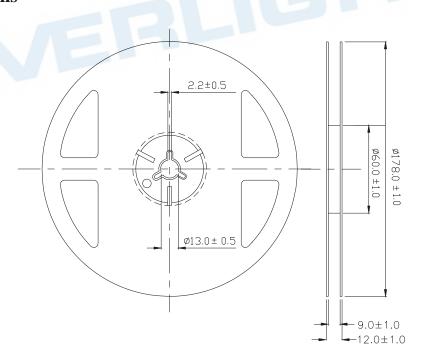

Note: The tolerances unless mentioned are ± 0.1 mm, unit = mm.


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 8 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs


45-21UNC/3335475/TR8

Carrier Tape Dimensions: Loaded Quantity 2000 pcs. Per Reel

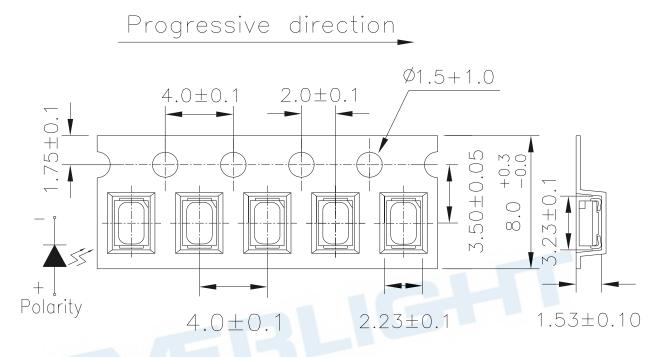

Note: Tolerances unless dimension are ± 0.1 mm, unit = mm.

Moisture Resistant Packaging

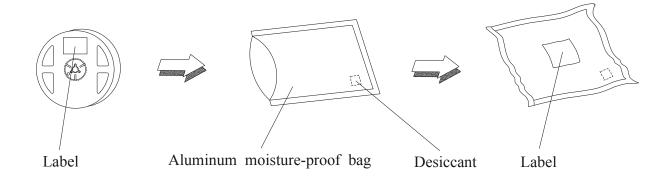

Everlight Electronics Co., Ltd.

Device No.: DSE-0007685

http://www.everlight.com

Prepared date:17-Oct.-2012

Rev. 2 Page: 9 of 12

Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8

Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 10 sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H:+100°C 15min ∫ 5 min L:-40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°℃	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA} / 25^{\circ}\text{C}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C/85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 10 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs

45-21UNC/3335475/TR8

Precautions for Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).


2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be used within one year and kept at 30℃ or less and 70%RH or less.
- 2.3 After opening the package: We recommend that the LED should be soldered quickly (within 3 days). The soldering condition is 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.(One time only)

3. Soldering Condition

3.1 Pb-free solder temperature profile

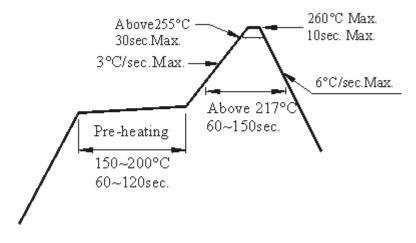

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 11 of 12 Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi



Top View LEDs


45-21UNC/3335475/TR8

4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

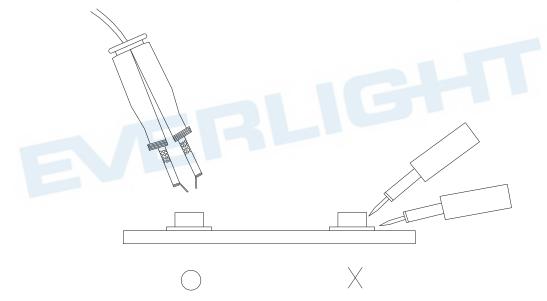

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 2 Page: 12 of 12

Device No.: DSE-0007685 Prepared date:17-Oct.-2012 Prepared by: chun hua Shi