

General Description

The 120P04 is a P-channel Power MOSFET.

They use advanced trench technology to provide excellent $R_{DS(ON)}$. The device is therefore suitable in advanced high-efficiency switching applications.

Features

- Fast switching
- Lower On-resistance
- 100% EAS Guaranteed
- Simple Drive Requirement


Product Summary

BVDSS	RDSON	ID
-40V	5.7mΩ	-120A

Applications

- DC-DC Converters
- Motor control
- LED controller

TO-220/263 Pin Configuration

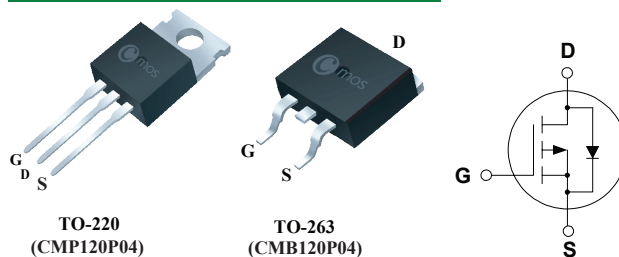

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	-40	V
V_{GS}	Gate-Source Voltage	±20	V
$I_D@T_C=25^{\circ}\text{C}$	Continuous Drain Current	-120	A
$I_D@T_C=100^{\circ}\text{C}$	Continuous Drain Current	-84	A
I_{DM}	Pulsed Drain Current	-360	A
EAS	Single Pulse Avalanche Energy ¹	576	mJ
$P_D@T_C=25^{\circ}\text{C}$	Total Power Dissipation	150	W
T_{STG}	Storage Temperature Range	-55 to 175	°C
T_J	Operating Junction Temperature Range	-55 to 175	°C

Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JA}$	Junction-to-Ambient	---	62.5	°C/W
$R_{\theta JC}$	Junction-to-Case	---	1.0	°C/W

Electrical Characteristics ($T_J=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
BV_{DSS}	Drain-Source Breakdown Voltage	$V_{GS}=0V$, $I_D=-250\mu A$	-40	---	---	V
$R_{DS(ON)}$	Static Drain-Source On-Resistance	$V_{GS}=-10V$, $I_D=-20A$	---	5.2	5.7	$m\Omega$
		$V_{GS}=-4.5V$, $I_D=-20A$	---	6.7	7.7	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=-340\mu A$	-1	---	-2.5	V
I_{DSS}	Drain-Source Leakage Current	$V_{DS}=-40V$, $V_{GS}=0V$, $T_J=25^{\circ}\text{C}$	---	---	-1	μA
		$V_{DS}=-40V$, $V_{GS}=0V$, $T_J=125^{\circ}\text{C}$	---	---	-200	
I_{GSS}	Gate-Source Leakage Current	$V_{GS}=\pm 20V$, $V_{DS}=0V$	---	---	± 100	nA
g_{fs}	Forward Transconductance	$V_{DS}=10V$, $I_D=-10A$	---	33	---	S
R_g	Gate Resistance	$V_{DS}=0V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	2.2	---	Ω
Q_g	Total Gate Charge	$V_{DD}=-20V$, $I_D=-20A$ $V_{GS}=-10V$	---	58	---	nC
Q_{gs}	Gate-Source Charge		---	10	---	
Q_{gd}	Gate-Drain Charge		---	8	---	
$T_{d(on)}$	Turn-On Delay Time	$V_{DD}=-20V$, $V_{GS}=-10V$, $R_{GS}=1.6\Omega$ $I_D=-20A$	---	11	---	ns
T_r	Rise Time		---	5	---	
$T_{d(off)}$	Turn-Off Delay Time		---	36	---	
T_f	Fall Time		---	6	---	
C_{iss}	Input Capacitance	$V_{DS}=-10V$, $V_{GS}=0V$, $f=1\text{MHz}$	---	8000	---	pF
C_{oss}	Output Capacitance		---	900	---	
C_{rss}	Reverse Transfer Capacitance		---	25	---	

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
I_S	Continuous Source Current	$V_G=V_D=0V$, Force Current	---	---	-120	A
I_{SM}	Pulsed Source Current		---	---	-360	A
V_{SD}	Diode Forward Voltage	$V_{GS}=0V$, $I_F=-20A$	---	---	-1.2	V

Notes:







1.Starting $T_J = 25^{\circ}\text{C}$, $L = 0.5\text{mH}$, $I_D = 48A$, $V_{DD} = 30V$, $V_{GS} = 10V$.

This product has been designed and qualified for the consumer market.

Cmos assumes no liability for customers' product design or applications.

Cmos reserves the right to improve product design ,functions and reliability without notice.

Typical Characteristics

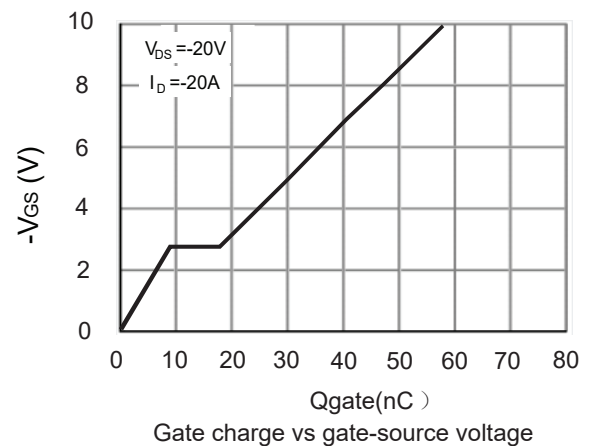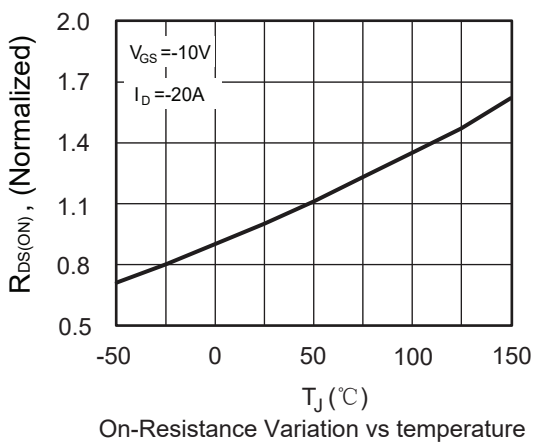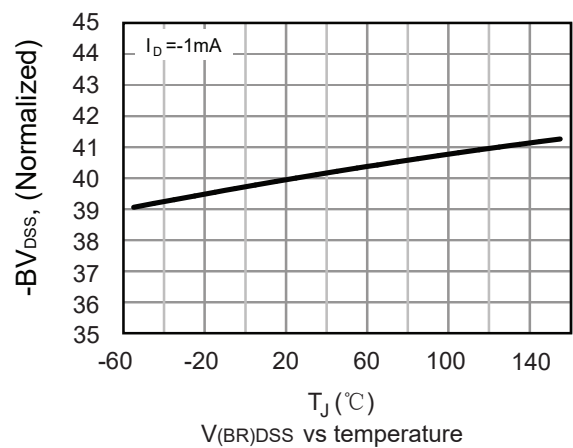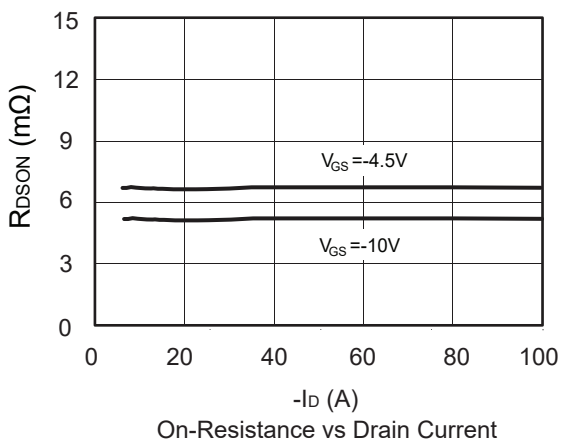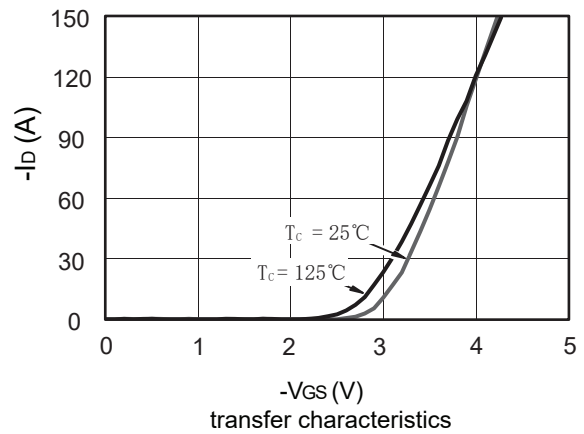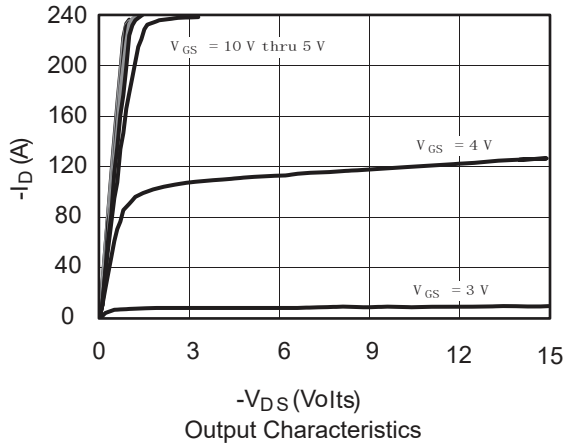

Typical Characteristics

