

20A SCHOTTKY BARRIER RECTIFIER

General Description

MBR20200CT Device optimized for ultra-low forward voltage drop to maximize efficiency in Power Supply applications.

Features

- Common Cathode
- Multilayer Metal -Silicon Potential Structure
- Have Over Voltage protect loop, high reliability
- RoHS Compliant


Product Summary

V_{RRM}	V_F	$I_{F(AV)}$
200V	0.9V	20A

Applications

- Power Supply – Output Rectification
- Power Management
- Instrumentation

TO-220 Pin Configuration

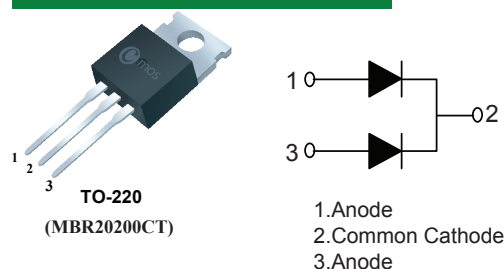

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{RRM}	Peak Repetitive Reverse Voltage	200	V
$I_{F(AV)}$	Average Rectified Forward Current (Rated VR-20Khz Square Wave) - 50% duty cycle	10 (Per Leg) 20 (Total)	A
dv/dt	Voltage rate of change (Rated VR)	10000	V/uS
I_{RRM}	Peak Repetitive Reverse Surge Current (2uS,1Khz)	0.5	A
I_{FSM}	Forward Peak Surge Current(Rated Load 8.3ms Half Mssine Wave-According to JEDEC Method)	250	A
T_J, T_{STG}	Operating and Storage Temperature Range	-40 to 150	°C


Thermal Data

Symbol	Parameter	Typ.	Max.	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case(Per Leg)	2	---	°C/W


Electrical Characteristics

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
V_F	Forward Voltage Drop per diode	$I_F=10A, T_C=25^{\circ}C$	---	0.85	0.9	V
		$I_F=10A, T_C=125^{\circ}C$	---	---	0.8	
I_R	Reverse Leakage Current per diode	$V_R=200V, T_C=25^{\circ}C$	---	---	0.01	mA
		$V_R=200V, T_C=125^{\circ}C$	---	---	10	mA


Typical Performance Characteristics

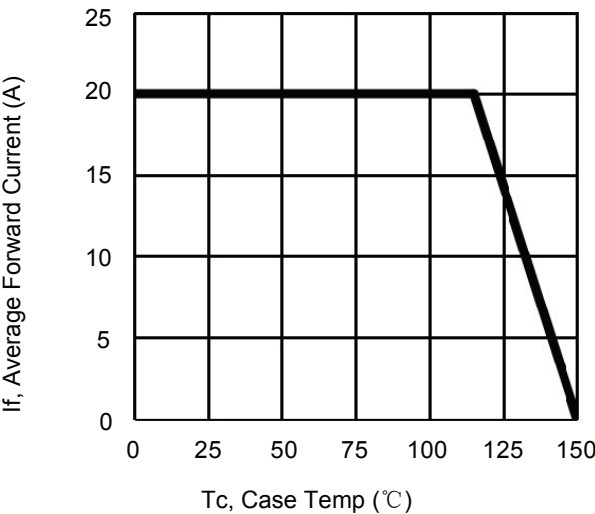

Current derating curve, per element

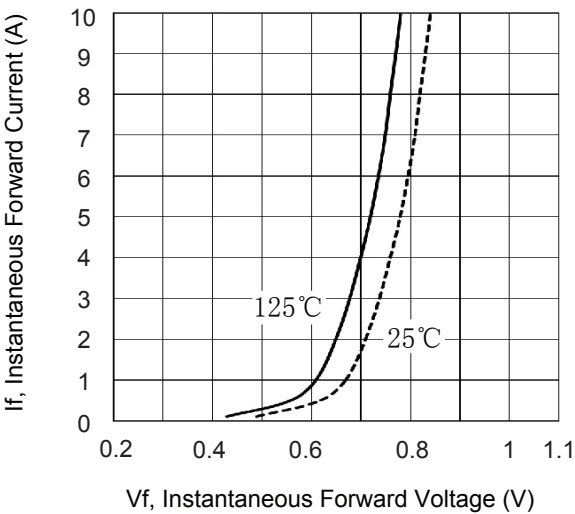

The forward voltage and forward current curve

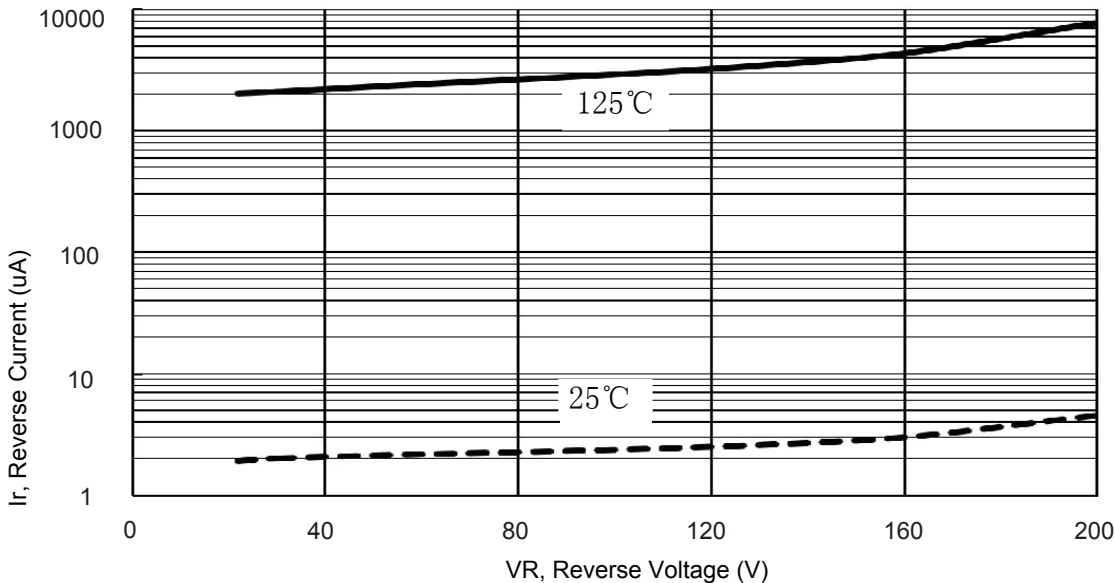

The reverse leak current and the reverse voltage (single-device) curve

This product has been designed and qualified for the consumer market.
Cmos assumes no liability for customers' product design or applications.
Cmos reserves the right to improve product design, functions and reliability without notice.