## **SIEMENS**

## **Data sheet**



Special type Circuit breaker size S00 for transformer protection A-release 10...16 A N-release 286 A screw terminal Standard switching capacity Ambient temperature - 50 °C 500 switching cycles

product brand name	SIRIUS
product designation	Circuit breaker
design of the product	For transformer protection
product type designation	3RV2
General technical data	
size of the circuit-breaker	S00
size of contactor can be combined company-specific	S00, S0
product extension auxiliary switch	Yes
power loss [W] for rated value of the current	
<ul> <li>at AC in hot operating state</li> </ul>	9.25 W
<ul> <li>at AC in hot operating state per pole</li> </ul>	3.1 W
insulation voltage with degree of pollution 3 at AC rated value	690 V
surge voltage resistance rated value	6 kV
shock resistance according to IEC 60068-2-27	25g / 11 ms
mechanical service life (operating cycles)	
<ul> <li>of the main contacts typical</li> </ul>	500
of auxiliary contacts typical	500
electrical endurance (operating cycles) typical	500
reference code according to IEC 81346-2	Q
Substance Prohibitance (Date)	10/01/2009
Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul> <li>during operation</li> </ul>	-50 +60 °C
during storage	-50 +80 °C
during transport	-50 +80 °C
relative humidity during operation	10 95 %
Main circuit	
number of poles for main current circuit	3
adjustable current response value current of the current- dependent overload release	10 16 A
operating voltage	
rated value	
• rateu value	20 690 V
<ul><li>rated value</li><li>at AC-3 rated value maximum</li></ul>	20 690 V 690 V
• at AC-3 rated value maximum	690 V
at AC-3 rated value maximum     operating frequency rated value	690 V 50 60 Hz
at AC-3 rated value maximum  operating frequency rated value  operational current rated value	690 V 50 60 Hz
at AC-3 rated value maximum  operating frequency rated value  operational current rated value  operational current	690 V 50 60 Hz 16 A
at AC-3 rated value maximum     operating frequency rated value     operational current rated value     operational current     at AC-3 at 400 V rated value	690 V 50 60 Hz 16 A

at 220 V rated value	4 6/0/
— at 230 V rated value — at 400 V rated value	4 kW 7.5 kW
— at 500 V rated value	7.5 kW 11 kW
— at 690 V rated value	11 KVV
operating frequency	45 A/L
at AC-3 maximum	15 1/h
Auxiliary circuit	
number of NC contacts for auxiliary contacts	0
number of NO contacts for auxiliary contacts	0
number of CO contacts for auxiliary contacts  Protective and monitoring functions	0
product function	
•	No
<ul><li> ground fault detection</li><li> phase failure detection</li></ul>	Yes
trip class	CLASS 10
design of the overload release	thermal
maximum short-circuit current breaking capacity (Icu)	uleilliai
at AC at 240 V rated value	100 kA
at AC at 240 V rated value     at AC at 400 V rated value	55 kA
at AC at 400 V rated value      at AC at 500 V rated value	10 kA
at AC at 690 V rated value	4 kA
operating short-circuit current breaking capacity (Ics) at AC	7101
• at 240 V rated value	100 kA
at 400 V rated value	30 kA
at 500 V rated value	5 kA
at 690 V rated value	2 kA
response value current of instantaneous short-circuit trip unit	286 A
Short-circuit protection	
product function short circuit protection	Yes
design of the short-circuit trip	magnetic
design of the fuse link for IT network for short-circuit protection of the main circuit	
• at 240 V	gG 80 A
• at 400 V	gG 63 A
● at 500 V	gG 50 A
<ul><li>at 500 V</li><li>at 690 V</li></ul>	gG 50 A gG 40 A
• at 690 V	
• at 690 V Installation/ mounting/ dimensions	gG 40 A
• at 690 V Installation/ mounting/ dimensions mounting position	gG 40 A any
at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method	gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715
at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height	gG 40 A  any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm
• at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
• at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm
at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing     with side-by-side mounting at the side     for grounded parts at 400 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm
at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  a with side-by-side mounting at the side  for grounded parts at 400 V  — downwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  with side-by-side mounting at the side for grounded parts at 400 V — downwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm
at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  a with side-by-side mounting at the side  for grounded parts at 400 V  — downwards — upwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm
at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  at with side-by-side mounting at the side  for grounded parts at 400 V  — downwards — upwards — at the side  for live parts at 400 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm
at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  a with side-by-side mounting at the side  for grounded parts at 400 V  — downwards  — upwards  — at the side  for live parts at 400 V  — downwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm
at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method  height  width  depth  required spacing  a with side-by-side mounting at the side  for grounded parts at 400 V  — downwards — upwards — at the side  for live parts at 400 V — downwards — upwards — upwards — upwards — upwards — upwards — upwards	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 9 mm 30 mm 9 mm
at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  at with side-by-side mounting at the side for grounded parts at 400 V  — downwards — upwards — at the side  for live parts at 400 V — downwards — upwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm
at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth required spacing  at with side-by-side mounting at the side for grounded parts at 400 V  downwards  upwards  at the side  for live parts at 400 V  downwards  upwards  at the side  for grounded parts at 400 V  downwards  at the side  for grounded parts at 500 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm 30 mm 9 mm
<ul> <li>at 690 V</li> <li>Installation/ mounting/ dimensions</li> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> <li>required spacing</li> <li>with side-by-side mounting at the side</li> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> </ul>	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm  0 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm
<ul> <li>at 690 V</li> <li>Installation/ mounting/ dimensions</li> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> <li>required spacing</li> <li>with side-by-side mounting at the side</li> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— upwards</li> <li>— upwards</li> <li>— upwards</li> </ul>	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm
<ul> <li>at 690 V</li> <li>Installation/ mounting/ dimensions</li> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> <li>required spacing</li> <li>with side-by-side mounting at the side</li> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>at the side</li> <li>at the side</li> </ul>	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm  0 mm 30 mm 30 mm 9 mm 30 mm 30 mm 30 mm 30 mm
at 690 V  Installation/ mounting/ dimensions  mounting position fastening method height width depth  required spacing  at with side-by-side mounting at the side for grounded parts at 400 V  downwards  upwards  at the side  for live parts at 400 V  downwards  upwards  at the side  for grounded parts at 500 V  downwards  upwards  at the side  for grounded parts at 500 V  downwards  upwards  at the side  for live parts at 500 V	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm
<ul> <li>at 690 V</li> <li>Installation/ mounting/ dimensions</li> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> <li>required spacing</li> <li>with side-by-side mounting at the side</li> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 500 V</li> <li>— downwards</li> <li>— at the side</li> <li>for live parts at 500 V</li> <li>— downwards</li> </ul>	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 9 mm
● at 690 V  Installation/ mounting/ dimensions  mounting position  fastening method height width  depth  required spacing  ● with side-by-side mounting at the side ● for grounded parts at 400 V  — downwards — upwards — at the side  ● for live parts at 400 V — downwards — upwards — at the side  ● for grounded parts at 500 V — downwards — upwards — at the side  ● for live parts at 500 V — downwards — upwards — at the side  ● for live parts at 500 V — downwards — at the side  ● for live parts at 500 V — downwards — at the side	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm  0 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 9 mm
<ul> <li>at 690 V</li> <li>Installation/ mounting/ dimensions</li> <li>mounting position</li> <li>fastening method</li> <li>height</li> <li>width</li> <li>depth</li> <li>required spacing</li> <li>with side-by-side mounting at the side</li> <li>for grounded parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 400 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for grounded parts at 500 V</li> <li>— downwards</li> <li>— upwards</li> <li>— at the side</li> <li>for live parts at 500 V</li> <li>— downwards</li> <li>— at the side</li> <li>for live parts at 500 V</li> <li>— downwards</li> </ul>	any screw and snap-on mounting onto 35 mm DIN rail according to DIN EN 60715 97 mm 45 mm 97 mm 0 mm 30 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 9 mm 30 mm 30 mm 9 mm

— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
• for live parts at 690 V	
— downwards	50 mm
— upwards	50 mm
— backwards	0 mm
— at the side	30 mm
— forwards	0 mm
Connections/ Terminals	
type of electrical connection	
for main current circuit	screw-type terminals
arrangement of electrical connectors for main current circuit	Top and bottom
type of connectable conductor cross-sections	
• for main contacts	
— solid or stranded	2x (0,75 2,5 mm²), 2x 4 mm²
<ul> <li>finely stranded with core end processing</li> </ul>	2x (0.5 1.5 mm²), 2x (0.75 2.5 mm²)
tightening torque	
for main contacts with screw-type terminals	0.8 1.2 N·m
design of screwdriver shaft	Diameter 5 to 6 mm
size of the screwdriver tip	Pozidriv size 2
design of the thread of the connection screw	
• for main contacts	M3
Safety related data	

10 a

IP20

Handle

Certificates/ approvals

display version for switching status

61508

General Product Approval Declaration of Conformity

**Test Certificates** 

Confirmation

<u>KC</u>





finger-safe, for vertical contact from the front



Special Test Certificate

**Test Certificates** 

Marine / Shipping

T1 value for proof test interval or service life according to IEC

protection class IP on the front according to IEC 60529

touch protection on the front according to IEC 60529

Type Test Certificates/Test Report











Marine / Shipping

other

Railway



Confirmation



Confirmation

Vibration and Shock

## Further information

Siemens has decided to exit the Russian market (see here).

https://press.siemens.com/global/en/pressrelease/siemens-wind-down-russian-business

Siemens is working on the renewal of the current EAC certificates.

Please contact your local Siemens office on the status of validity of the EAC certification if you intend to import or offer to supply these products to an EAC relevant market (other than the sanctioned EAEU member states Russia or Belarus).

Information on the packaging

https://support.industry.siemens.com/cs/ww/en/view/109813875

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RV2411-4AA10-0BA0

Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RV2411-4AA10-0BA0

Service&Support (Manuals, Certificates, Characteristics, FAQs,...) https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-4AA10-0BA0


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)


Characteristic: Tripping characteristics, I²t, Let-through current


https://support.industry.siemens.com/cs/ww/en/ps/3RV2411-4AA10-0BA0/char


Further characteristics (e.g. electrical endurance, switching frequency)

http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RV2411-4AA10-0BA0&objecttype=14&gridview=view1

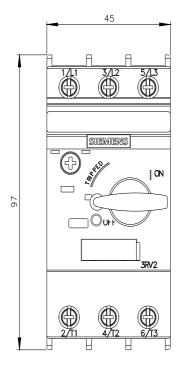

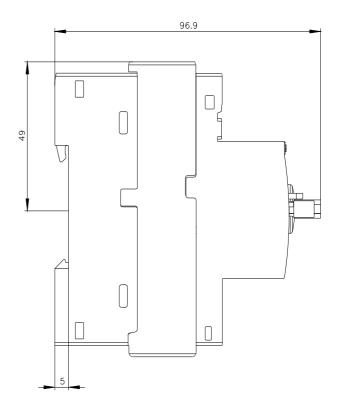

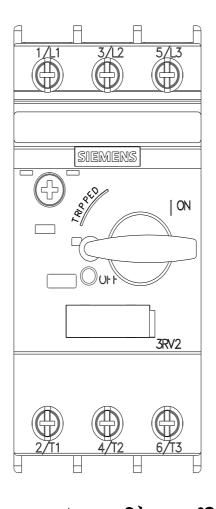

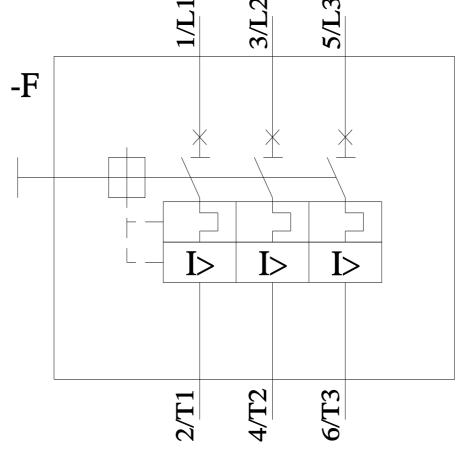

last modified: 11/21/2022 🖸