SIEMENS

Data sheet



Illuminated pushbutton, 22 mm, round, metal, shiny, green, pushbutton, flat, momentary contact type, with holder, 1 NO+1 NC, LED module with integrated LED 24 V AC/DC, screw terminal, with laser labeling, inscription or symbol Customer-specific selection with SIRIUS ACT configurator (CIN)

product brand name	SIRIUS ACT
product designation	Illuminated pushbuttons
design of the product	Complete unit
product type designation	3SU1
product line	Metal, shiny, 22 mm
manufacturer's article number	
 of supplied contact module at position 1 	3SU1400-1AA10-1FA0
 of supplied LED module 	3SU1401-1BB40-1AA0
 of the supplied holder 	3SU1550-0AA10-0AA0
 of the supplied actuator 	3SU1051-0AB40-0AA0
number of command points	1
Actuator	
design of the actuating element	Button, flat
principle of operation of the actuating element	momentary contact type
product extension optional light source	Yes
color of the actuating element	green
material of the actuating element	plastic
shape of the actuating element	round
outer diameter of the actuating element	29.45 mm
marking of the actuating element	Any inscription, text or symbol, can only be ordered via SIRIUS ACT configurator/Configuration Identification Number (CIN)
number of contact modules	1
Front ring	
product component front ring	Yes
design of the front ring	Standard
material of the front ring	Metal, high gloss
color of the front ring	silver
Holder	
material of the holder	Plastic
Display	
number of LED modules	1
General technical data	
product function positive opening	Yes
product component light source	Yes
insulation voltage rated value	320 V
degree of pollution	3
type of voltage of the operating voltage	AC/DC
surge voltage resistance rated value	4 kV
protection class IP	IP66, IP67, IP69(IP69K)

• of the terminal	IP20, clamping screw tightened
degree of protection NEMA rating	1, 2, 3, 3R, 4, 4X, 12, 13
shock resistance	
• according to IEC 60068-2-27	sinusoidal half-wave 15g / 11 ms
vibration resistance	40 500 Hz. 5~
according to IEC 60068-2-6	10 500 Hz: 5g
operating frequency maximum	3 600 1/h
mechanical service life (switching cycles) typical	3 000 000
electrical endurance (switching cycles) typical thermal current	10 000 000
	10 A
reference code according to IEC 81346-2	S
continuous current of the C characteristic MCB	10 A; for a short-circuit current smaller than 400 A 10 A
continuous current of the Quick DIAZED fuse link	10 A
continuous current of the DIAZED fuse link gG	10/A 10/01/2014
Substance Prohibitance (Date)	10/01/2014
operating voltage ● at AC	
— at 50 Hz rated value	5 500 V
— at 60 Hz rated value — at 60 Hz rated value	5 500 V
at DC rated value at DC rated value	5 500 V
	000 V
Power Electronics	One melanoration per 100 million (47.)/ 5 m/\
contact reliability	One maloperation per 100 million (17 V, 5 mA), one maloperation per 10 million (5 V, 1 mA)
Supply voltage	. (2 ., ,
type of voltage of the supply voltage of the light source	AC/DC
supply voltage of the light source at AC	7.0.50
at 50 Hz rated value	24 V
at 50 Hz rated value at 60 Hz rated value	24 V
supply voltage 1 of the light source at DC rated value	24 V
Control circuit/ Control	
inrush current of LED module maximum	9 Δ
inrush current of LED module maximum	2 A
Auxiliary circuit	
Auxiliary circuit design of the contact of auxiliary contacts	Silver alloy
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts	Silver alloy
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts	Silver alloy
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals	Silver alloy 1 1
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories	Silver alloy 1 1
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections	Silver alloy 1 1 screw-type terminals Screw-type terminal
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection • of modules and accessories type of connectable conductor cross-sections • solid with core end processing	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing of inely stranded with core end processing	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing finely stranded with core end processing finely stranded without core end processing at AWG cables	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing finely stranded with core end processing finely stranded without core end processing at AWG cables tightening torque of the screws in the bracket	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing finely stranded with core end processing finely stranded without core end processing at AWG cables tightening torque of the screws in the bracket tightening torque with screw-type terminals	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing solid without core end processing inlely stranded with core end processing inlely stranded without core end processing at AWG cables tightening torque of the screws in the bracket tightening torque with screw-type terminals Lamp	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²)
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 1 1.2 N·m 0.8 0.9 N·m
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) LED green
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 1 1.2 N·m 0.8 0.9 N·m
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) LED green
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection of modules and accessories type of connectable conductor cross-sections solid with core end processing finely stranded with core end processing finely stranded without core end processing at AWG cables tightening torque of the screws in the bracket tightening torque with screw-type terminals Lamp type of light source color of the light source light intensity Ambient conditions ambient temperature	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd
Auxiliary circuit design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (0.5 1.5 mm²) 2x (1,0 1,5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no
design of the contact of auxiliary contacts number of NC contacts for auxiliary contacts number of NO contacts for auxiliary contacts Connections/ Terminals type of electrical connection	Silver alloy 1 1 screw-type terminals Screw-type terminal 2x (0.5 0.75 mm²) 2x (1.0 1.5 mm²) 2x (1.0 1.5 mm²) 2x (1,0 1,5 mm²) 2x (18 14) 1 1.2 N·m 0.8 0.9 N·m LED green 900 1 800 mcd -25 +70 °C -40 +80 °C 3M6, 3S2, 3B2, 3K6 (with relative air humidity of 10 95%, no condensation in operation permitted for all devices behind front panel)

height	40 mm
width	30 mm
shape of the installation opening	round
mounting diameter	22.3 mm
positive tolerance of installation diameter	0.4 mm
mounting height	11 mm
installation width	29.5 mm
installation depth	71.7 mm

Certificates/ approvals

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

https://www.siemens.com/ic10

Industry Mall (Online ordering system)

https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3SU1152-0AB40-1FA0-Z Y19


Cax online generator

http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3SU1152-0AB40-1FA0-Z Y19

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

https://support.industry.siemens.com/cs/ww/en/ps/3SU1152-0AB40-1FA0-Z Y19

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3SU1152-0AB40-1FA0-Z Y19&lang=en

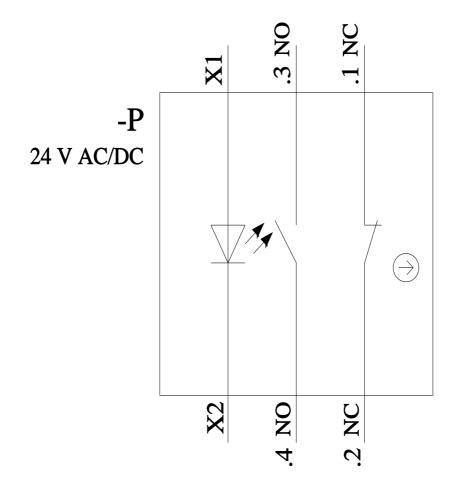

last modified: 1/26/2022 🖸