

E1A THRU E1J

VOLTAGE RANGE 50 to 600 Volts

CURRENT 1.0 Ampere

ROHS

Features

- Fast recovery glass passivated: chip 46mil
- Low forward voltage drop
- Low leakage current
- High forward surge capability
- High temperature soldering: 260°C/10S at terminals
- Component in accordance to RoHS 2002/95/1 and WEEE 2002/96/EC

1 2

Mechanical Data

- Case: JEDEC SOD-123FL mold plastic Body over glass passivated chip
- Terminals:Solder plated, solderable per J-STD-002B and JESD22-B102D
- Polarity: Laser band denote cathode band
- Weight: 0.00063ounce, 0.018grams

Maximum Ratings and Electrical Characteristics

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

TYPE NUMBER			E1A	E1B	E1C	E1D	E1F	E1G	E1J	UNIT
Maximum Repetitive Peak Reverse Voltage			50	100	150	200	300	400	600	Volts
Maximum RMS Voltage		V _{RMS}	35	70	105	140	210	280	420	Volts
Maximum DC Blocking Voltage			50	100	150	200	300	400	600	Volts
Maximum Average Forward Rectified Current At T _A =100℃			1.0						Amps	
Peak Forward Surge Current 8.3ms single half sine wave superimposed on rated load (JEDEC Method)			30					Amps		
Maximum Instantaneous Forward Voltage at 1.0A			0.95 1.25 1.70			1.70	Volts			
Maximum DC Reverse Current at rated DC blocking T _A = 25°C			5.0					μAmps		
voltage at $T_A = 125^{\circ}C$		I _R	100							
Maximuml Reverse Recovery Time (NOTE 1)			35					nS		
Typical Junction Capacitance (NOTE 3)			10 8				рF			
Typical Thermal Resistance (NOTE 2)		R _{eja}	60					°C/W		
Typical Memia Resistance			28				C/VV			
Operating Junction Temperature			-55 to +150					℃		
Storage Temperature Range			-55 to +150				$^{\circ}$			

Notes:

- 1. Reverse Recovery Test Conditions:If=0.5A,Ir=1.0A,Irr=0.25A.
- 2. Polymide PCB, 0.043"×0.047"(1.10mm×1.20mm). Copper, minimum recommended pad layout per.
- 3. Measured at 1.0MHz and applied reverse voltage of 4.0V.

VOLTAGE RANGE 50 to 600 Volts E1A THRU E1J **CURRENT** 1.0 Ampere

Ratings and Characteristic Curves (T_A=25°C unless otherwise noted)

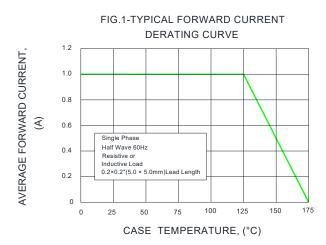


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

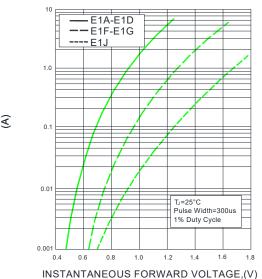


FIG.5-TYPICAL JUNCTION CAPACITANCE

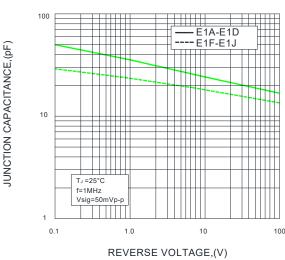


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT



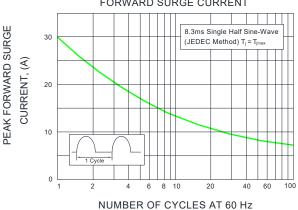


FIG.4-TYPICAL REVERSE **CHARACTERISTICS**

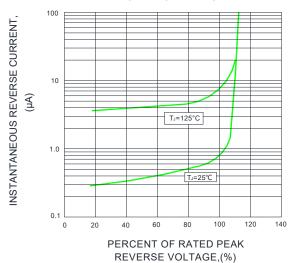

F1G.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

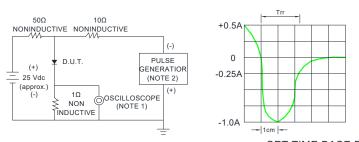

NOTES: 1.Rise Time=7ns max. Input Impedance= 1 magohm. 22pF

2.Rise time=10ns max. Source Impedance= 50 ohms

SET TIME BASE FOR 50/100ns/cm

INSTANTANEOUS FORWARD CURRENT

E1A THRU E1J


VOLTAGE RANGE 50 to 600 Volts

CURRENT 1.0 Ampere

Package Outline Dimensions in inches (millimeters)




Unit: mm

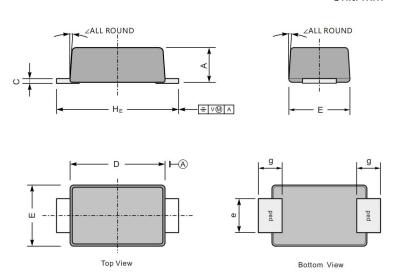

UNIT		Α	С	D	E	е	g	H _E	∠
mm	max	1.1	0.20	2.9	1.9	1.1	0.9	3.8	
"""	min	0.9	0.12	2.6	1.7	0.8	0.7	3.5	7°
mil	max	43	7.9	114	75	43	35	150	,
Hill	min	35	4.7	102	67	31	28	138	

The recommended mounting pad size

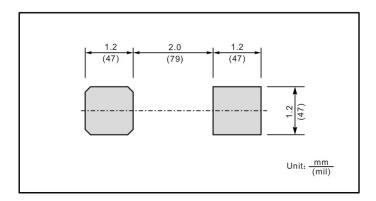


E1A THRU E1J

VOLTAGE RANGE 50 to 600 Volts

CURRENT 1.0 Ampere


Packing Requirments

PS black anti-static carrier tape packing

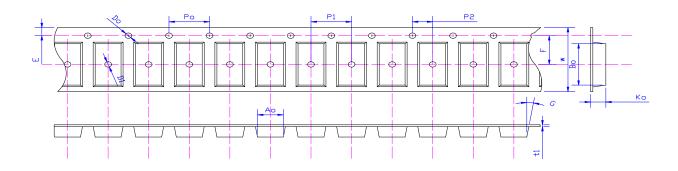

	Specifications	Ao	Во	Ко	Ро	W	t1
ſ	SOD123FL	2.12±0.10	3.95±0.10	1.35±0.10	4.00±0.1	8.0±0.10	0.20±0.02

• 7 "antistatic plastic reel

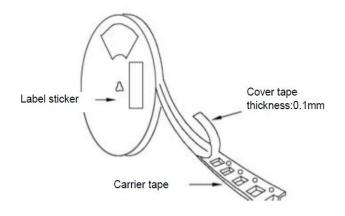


	07" Reel						
DEVICE TYPE	Q'TY/REEL(pcs)	REEL/BOX	BOX/CARTOON	Q'TY/CARTON(pcs)			
SOD123FL	3000	4	16	192000			



E1A THRU E1J

VOLTAGE RANGE CURRENT 50 to 600 Volts 1.0 Ampere

Reflow Profile

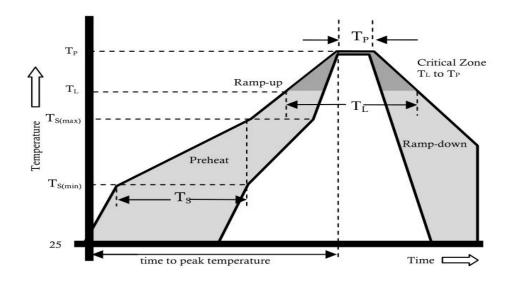

	Reflow Condition	Pb-Free Assembly		
	Temperature Min.	+150°C		
Pre Heat	Temperature Max.	+200°C		
	Time(Min to Max)	60-180 secs.		
Average ram	np up rate(Liquidus Temp(T _L) to peak)	3°C/sec. Max.		
T _s (max) to T _L - Ramp-up Rate	3°C/sec. Max.		
Reflow	Temperature (T _L)(Liquidus)	+217°C		
Reliow	Temperature (T₋)	60-150 secs.		
	Peak Temp (T♭)	+(260+0/-5)°C		
Time wit	thin 5°C of actual Peak Temp (T _P)	25 secs.		
	Ramp-down Rate	6°C/sec. Max.		
Tiı	me 25°C to peak Temp (T _P)	8 min. Max.		
	Do not exceed	+260°C		



E1A THRU E1J

VOLTAGE RANGE CURRENT 50 to 600 Volts 1.0 Ampere

Disclaimer

The information presented in this document is for reference only. Chongqing changjie Electronic Technology Co., Ltd. reserves the right to make changes without notice for the specification of the products displayed herein to improve reliability, function or design or otherwise.

The product listed herein is designed to be used with ordinary electronic equipment or devices, and not designed to be used with equipment or devices which require high level of reliability and the malfunction of with would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), Changjie or anyone on its behalf, assumes no responsibility or liability for any damages resulting from such improper use of sale.

This publication supersedes & replaces all information previously supplied. For additional information, please visit our website http://www.czlangjie.com, or consult your nearest Langjie's sales office for further assistance.