

1401075

https://www.phoenixcontact.com/pc/products/1401075

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector front mounting, Universal, 4-position, straight, M12, coding: A, on free cable end, Front mounting, Pg9, Individual wires, cable length: 0.5 m, 0.34 mm², TPE litz wire

Your advantages

- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- · For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1401075
Packing unit	1 pc
Minimum order quantity	100 pc
Product key	ABQCEE
GTIN	4046356522311
Weight per piece (including packing)	28.4 g
Weight per piece (excluding packing)	18.6 g
Customs tariff number	85444290
Country of origin	DE



1401075

https://www.phoenixcontact.com/pc/products/1401075

Technical data

Notes

Ga	neral
Ge	i i c i ai

The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.

Safety note

Safety note

WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.

- WARNING: Commission properly functioning products only.
 The products must be regularly inspected for damage.
 Decommission defective products immediately. Replace damaged products. Repairs are not possible.
- WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
- The products are suitable for applications in plant, controller, and electrical device engineering.
- When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
- Assembled products may not be manipulated or improperly opened.
- Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
- When using the product in direct connection with third-party manufacturers, the user is responsible.
- For operating voltages > 50 V AC, conductive connector housings must be grounded
- Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
- Observe the corresponding technical data. You will find information:
- o On the product
- o On the packing label
- o In the supplied documentation
- o Online at phoenixcontact.com/products under the product
- · Only use tools recommended by Phoenix Contact
- Use a protective cap to protect connectors that are not in use.
 The suitable accessories are available online in the accessory section of the product at phoenixcontact.com/products



1401075

https://www.phoenixcontact.com/pc/products/1401075

Contact connection type

	Ensure that the protective or functional ground has been properly connected.
	 VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	• The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Mounting	
Mounting type	Front mounting Pg9
Connection method	Individual wires
	manada mee
Product properties	
Product type	Circular connectors (device side)
Sensor type	Universal
Number of positions	4
No. of cable outlets	1
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	
Overvoltage category	II
Degree of pollution	3
Bagines of political	
Material specifications	
Flammability rating according to UL 94	V0
Seal material	NBR
Contact material	CuZn
Contact surface material	Ni/Au
Contact carrier material	PA 66
Material for screw connection	Brass, nickel-plated
Conductor material	Tin-plated Cu litz wires
Electrical properties	
Nominal voltage U _N	250 V
Nominal current I _N	4 A
Max. conductor resistance	57.6 Ω/km
Connection data	
Conductor connection	
Connection method	Individual wires
555000111100100	

Pin



1401075

https://www.phoenixcontact.com/pc/products/1401075

Conductor cross section	0.34 mm²
nnector	
Connection 1	
Head cable outlet	straight
Head thread type	M12
Coding	A
Connection 2	
Head design	free cable end
able/line	
Cable length	0.5 m
Cable type	TPE litz wire
Signal type/category	Universal
Wire diameter incl. insulation	1.2 mm ±0.07 mm
Single wire, color	brown, white, blue, black
Conductor material	Tin-plated Cu litz wires
Conductor structure signal line	7x 0.25 mm
AWG signal line	22
Material wire insulation	TPE
Thickness, insulation	0.21 mm
Nominal voltage, cable	300 V
Test voltage, cable	2000 V AC
Cable resistance	≤ 57.6 Ω/km
Cable insulation resistance	≥ 20 MΩ*km

Standards and regulations

Ambient temperature (operation)

Degree of protection

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

IP67 IP67

-25 °C ... 85 °C (Plug / socket)


-25 $^{\circ}\text{C}$... 90 $^{\circ}\text{C}$ (cable, fixed installation)



1401075


https://www.phoenixcontact.com/pc/products/1401075

Drawings

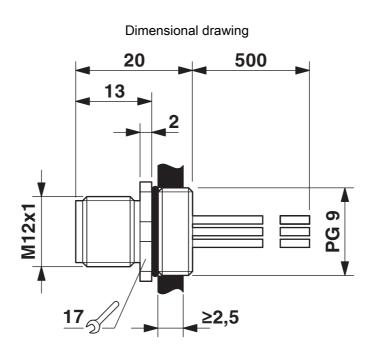

Dimensional drawing

Circuit diagram

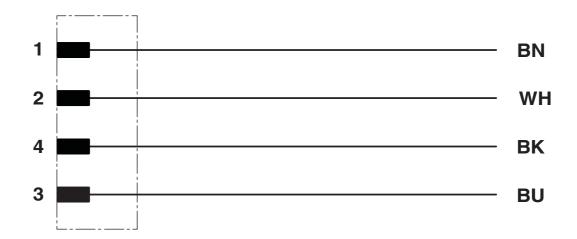




1401075

https://www.phoenixcontact.com/pc/products/1401075

Schematic diagram

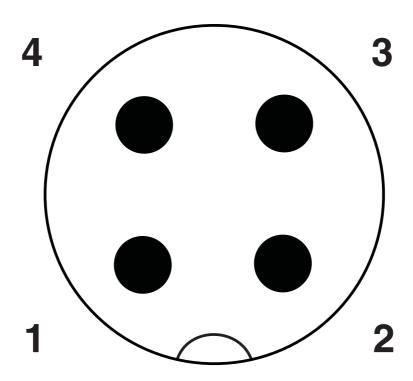

Pin assignment M12 plug, 4-pos., A-coded, view plug side




1401075

https://www.phoenixcontact.com/pc/products/1401075

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/pc/products/1401075

<i>71</i>	UL Recognized Approval ID: E118976-20100522				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		250 V	4 A	- 22	-





1401075

https://www.phoenixcontact.com/pc/products/1401075

Classifications

ECLASS

201.00		
	ECLASS-11.0	27440102
	ECLASS-12.0	27440116
	ECLASS-13.0	27440116
ETIM		
	ETIM 8.0	EC002635
UNSPSC		
	UNSPSC 21.0	39121400



1401075

https://www.phoenixcontact.com/pc/products/1401075

Environmental product compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values



1401075

https://www.phoenixcontact.com/pc/products/1401075

Accessories

SACC-E-MU-PG9 - Flat nut

1504084

https://www.phoenixcontact.com/pc/products/1504084

Flat nut, Screw mounting, Pg9, cable gland Pg9, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1239862



SACC-PG9-SEAL CLM - Flat gasket

1556320

https://www.phoenixcontact.com/pc/products/1556320

Pg9 flat gasket, for M12 flush-type connectors with Pg9 fastening thread





1401075

https://www.phoenixcontact.com/pc/products/1401075

PROT-M12 FS - Sealing cap

1560251

https://www.phoenixcontact.com/pc/products/1560251



M12 sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

PROT-M12 FS-M - Sealing cap

1430488

https://www.phoenixcontact.com/pc/products/1430488



M12 metal sealing cap for unoccupied M12 plugs of the sensor/actuator cable, flush-type plugs and I/O devices in the field

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG Flachsmarktstraße 8 D-32825 Blomberg +49 (0) 5235-3 00 info@phoenixcontact.com