

1073963

https://www.phoenixcontact.com/us/products/1073963

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Device connector, rear mounting, Universal, 5-position, straight, M12, coding: A, on free cable end, Rear mounting, M16 x 1.5, Individual wires, TPE litz wire, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1238272

Your advantages

- Easy-to-install, optimized XL housing contour with wrench size 19
- · Mechanical tightening limitation for long-term-stable gasket
- · Preassembled with litz wires for immediate use
- · Customer-specific assemblies and litz wire lengths available
- · Sealed on the litz wire side for optimum leak-tightness
- · All standard pin assignments and codings for signal, data, and power transmission with a uniform design-in design
- For high transmission safety: shield connection to the housing with optional EMC nut

Commercial data

Item number	1073963
Packing unit	1 pc
Minimum order quantity	50 pc
Note	Made to order (non-returnable)
Sales key	AB24
Product key	ABQCGB
GTIN	4055626770932
Weight per piece (including packing)	30.7 g
Weight per piece (excluding packing)	30.7 g
Customs tariff number	85366990
Country of origin	DE



1073963

https://www.phoenixcontact.com/us/products/1073963

Technical data

Notes

les	
General	The electrical and mechanical data specified assume that the connector pair is correctly locked and mounted. If the connector is unlocked and if there is a danger of contamination, the connector must be sealed using a protective cap > IP54. Influences arising from litz wires, cables or PCB assembly must also be taken into consideration.
General	Lock nut is included in the scope of delivery
afety note	
Safety note	WARNING: The connectors may not be plugged in or disconnected under load. Ignoring the warning or improper use may damage persons and/or property.
	 WARNING: Commission properly functioning products only. The products must be regularly inspected for damage. Decommission defective products immediately. Replace damaged products. Repairs are not possible.
	 WARNING: Only electrically qualified personnel may install and operate the product. They must observe the following safety notes. The qualified personnel must be familiar with the basics of electrical engineering. They must be able to recognize and prevent danger. The relevant symbol on the packaging indicates that only personnel familiar with electrical engineering are allowed to install and operate the product.
	The products are suitable for applications in plant, controller, and electrical device engineering.
	 When operating the connectors in outdoor applications, they must be separately protected against environmental influences.
	 Assembled products may not be manipulated or improperly opened.
	 Only use mating connectors that are specified in the technical data of the standards listed (e.g. the ones listed in the product accessories online at phoenixcontact.com/products).
	 When using the product in direct connection with third-party manufacturers, the user is responsible.
	 For operating voltages > 50 V AC, conductive connector housings must be grounded
	 Ensure that when laying the cable, the tensile load on the connectors does not exceed the upper limit specified in the standards.
	Observe the corresponding technical data. You will find information: o On the product o On the packing label o In the supplied documentation o Online at phoenixcontact.com/products under the product
	Only use tools recommended by Phoenix Contact
	Use a protective cap to protect connectors that are not in use. The principle appropriate the protection in the processor is a protection of the processor in the processor is a protection of the processor.

The suitable accessories are available online in the accessory



1073963

https://www.phoenixcontact.com/us/products/1073963

	section of the product at phoenixcontact.com/products
	Ensure that the protective or functional ground has been properly connected.
	VDE 0100/1.97 § 411.1.3.2 and DIN EN 60 204/11.98 § 14.1.3 are applicable when combining several circuits in a cable and/or connector
	 The connector warms up in normal operation. Depending on the ambient conditions, the surface of the connector can continue to warm up. In this case, the user is responsible for posting warnings (e.g. DIN EN ISO 13732-1:2008-12).
Mounting	
Mounting type	Rear wall/screw mounting
Assembly instructions	Tightening limitation
Connection method	Individual wires
Product properties	
Product type	Circular connectors (device side)
Sensor type	Universal
Number of positions	5
No. of cable outlets	1
Shielded	no
Coding	A
Thread type	M12
Insulation characteristics	
Overvoltage category	III
Degree of pollution	3
Material specifications	
Flammability rating according to UL 94	Vo
Seal material	FKM
Contact material	CuZn
Contact material	Au
Contact carrier material	PA 6.6
Material for screw connection	Zinc die-cast, nickel-plated
Conductor material	Tin-plated Cu litz wires
	place of the times
Electrical properties	
Rated surge voltage	1.5 kV AC
Contact resistance	≤ 3 mΩ
Insulation resistance	≥ 100 MΩ
Nominal voltage U _N	60 V
Nominal current I _N	4 A
Max. conductor resistance	57.6 mΩ/m



1073963

https://www.phoenixcontact.com/us/products/1073963

Connection data

Conductor connection

Connection method	Individual wires
Contact connection type	Pin
Conductor cross section	0.34
Tightening torque	0.8 Nm
	1.3 Nm

Mechanical properties

Mechanical data

	100
Insertion/withdrawal cycles	> 100

Connector

Connection 1

Head cable outlet	straight
Head thread type	M12
Coding	A

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

Cable length	0.1	
Cable type	TPE litz wire	
Signal type/category	Universal	
Wire diameter incl. insulation	1.2 mm ±0.07 mm	
Single wire, color	black, brown,blue, white, gray	
Conductor material	Tin-plated Cu litz wires	
Conductor structure signal line	7x 0.25 mm	
AWG signal line	22	
Material wire insulation	TPE 0.21 mm	
Thickness, insulation		
Nominal voltage, cable	300 V	
Test voltage, cable	2000 V AC	
Cable resistance	≤ 57.6 mΩ/m	
Cable insulation resistance	≥ 20 MΩ*km	
Ambient temperature (operation)	-40 °C 85 °C (cable, fixed installation)	
	-25 °C 85 °C (Cable, flexible installation)	

Environmental and real-life conditions

Ambient conditions



1073963

https://www.phoenixcontact.com/us/products/1073963

Degree of protection	IP67
	IP67
	IP65/IP67
Ambient temperature (operation)	-2585 (Plug / socket)
	-40 °C 85 °C (without mechanical actuation)
	-25 °C 85 °C (Cable, flexible installation)
	-40 °C 85 °C (cable, fixed installation)

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	according to IEC 61076-2-101




1073963


https://www.phoenixcontact.com/us/products/1073963

Drawings

Circuit diagram

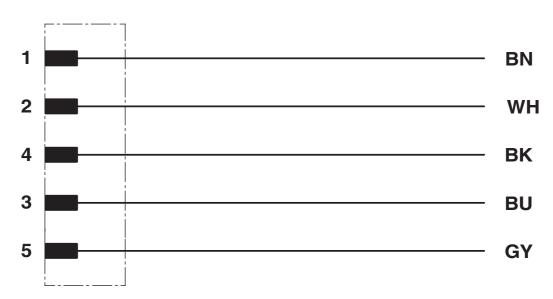

Dimensional drawing

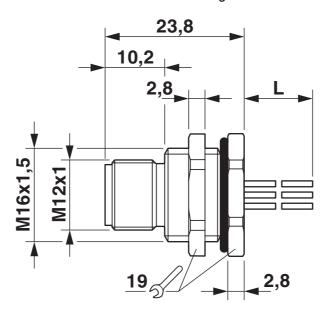


M12 flush-type plug



1073963

https://www.phoenixcontact.com/us/products/1073963

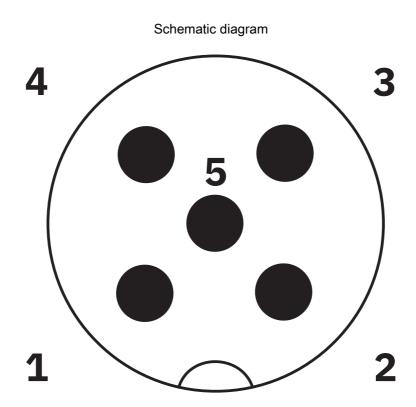

Pin assignment M12 male connector, 5-pos., A-coded, male side



1073963

https://www.phoenixcontact.com/us/products/1073963

Approvals

To download certificates, visit the product detail page: https://www.phoenixcontact.com/us/products/1073963



e 911 us	CULus Recognized Approval ID: E221474-20140616				
		Nominal voltage U _N	Nominal current I _N	Cross section AWG	Cross section mm ²
		60 V	4 A	22 - 20	-



1073963

https://www.phoenixcontact.com/us/products/1073963

Classifications

ECLASS

(200.00					
	ECLASS-11.0	27440102				
	ECLASS-12.0	27440116				
	ECLASS-13.0	27440116				
ΕΊ	ETIM					
	ETIM 8.0	EC002635				
UNSPSC						
	UNSPSC 21.0	39121400				



1073963

https://www.phoenixcontact.com/us/products/1073963

Environmental product compliance

REACh SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved https://www.phoenixcontact.com

Phoenix Contact USA 586 Fulling Mill Road Middletown, PA 17057, United States (+717) 944-1300 info@phoenixcon.com