

MMCX Plug to MMCX Plug Right Angle Cable
Assembly using RG178 Coax, 10 FT



LCCA30066-FT10

Configuration

- Connector 1: MMCX Plug
- Connector 2: MMCX Plug Right Angle
- Cable Type: RG178

Features

- Max Frequency 3 GHz
- 70% VoP
- FEP Jacket
- Heat Shrink Strain Relief

Applications

- General Purpose
- Laboratory Use



Description

L-com's LCCA30066-FT10 is a MMCX plug to MMCX plug right angle cable assembly using RG178 coax, 10 FT and ships same-day. The RG178 coax of this MMCX cable uses the PTFE dielectric with a VoP of 70%. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com MMCX to MMCX cable assembly has a plug to plug gender configuration with flexible RG178 series coax and operates to 3 GHz. The shielding of this MMCX cable is comprised of silver plated copper braid. This right angle MMCX cable interface on the RG178 coax allows for easier connections in tight spaces.

Custom versions of this MMCX plug to MMCX plug cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30066-FT10 L-com MMCX Plug to MMCX Plug Right Angle Cable Assembly using RG178 Coax, 10 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

MMCX Plug to MMCX Plug Right Angle Cable
Assembly using RG178 Coax, 10 FT



LCCA30066-FT10

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		3	GHz
VSWR			1.35:1	%
Velocity of Propagation		70		%
Capacitance		29.4 [96.46]		pF/ft [pF/m]
Operating Voltage (AC)			170	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.1	0.25	0.5	1	3	GHz
Insertion Loss (Max.)	1.68	2.38	3.36	4.75	8.15	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.2 dB per right angle connector and 0.1 dB per straight connector.

Mechanical Specifications

Cable Assembly

Length	120 in [304.8 cm]
Diameter	0.072 in [1.83 mm]

Cable

Cable Type	RG178
Impedance	50 Ohms
Inner Conductor Type	Stranded
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	PTFE
Number of Shields	1
Shield Layer 1	Silver Plated Copper Braid
Jacket Material	FEP, Tan
Jacket Diameter	0.072 in [1.83 mm]
Repeated Minimum Bend Radius	0.4 in [10.16 mm]

MMCX Plug to MMCX Plug Right Angle Cable
Assembly using RG178 Coax, 10 FT



LCCA30066-FT10

Connectors

Description	Connector 1	Connector 2
Type	MMCX Plug	MMCX Plug Right Angle
Specification		BS EN 122340
Impedance	50 Ohms	50 Ohms
Contact Material and Plating	Gold	Brass, Gold
Contact Plating Specification		30 μ in minimum
Dielectric Type	PTFE	PTFE
Body Material and Plating	Brass, Gold	Brass, Gold
Body Plating Specification		3 μ in minimum

Environmental Specifications

Temperature

Operating Range -55 to +200 deg C

Compliance Certifications

(see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.


MMCX Plug to MMCX Plug Right Angle Cable
Assembly using RG178 Coax, 10 FT



LCCA30066-FT10

How to Order

Part Number Configuration:

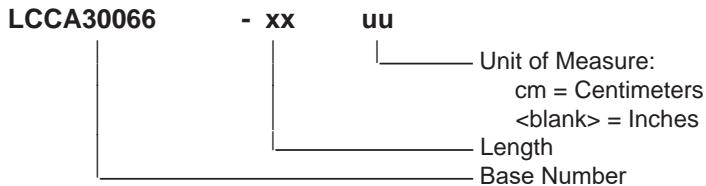

Example: LCCA30066-12 = 12 inches long cable
LCCA30066-100cm = 100 cm long cable


MMCX Plug to MMCX Plug Right Angle Cable Assembly using RG178 Coax, 10 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

MMCX Plug to MMCX Plug Right Angle Cable Assembly using RG178 Coax, 10 FT

L-com CAD Drawing

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	01/31/2020	SELLIS

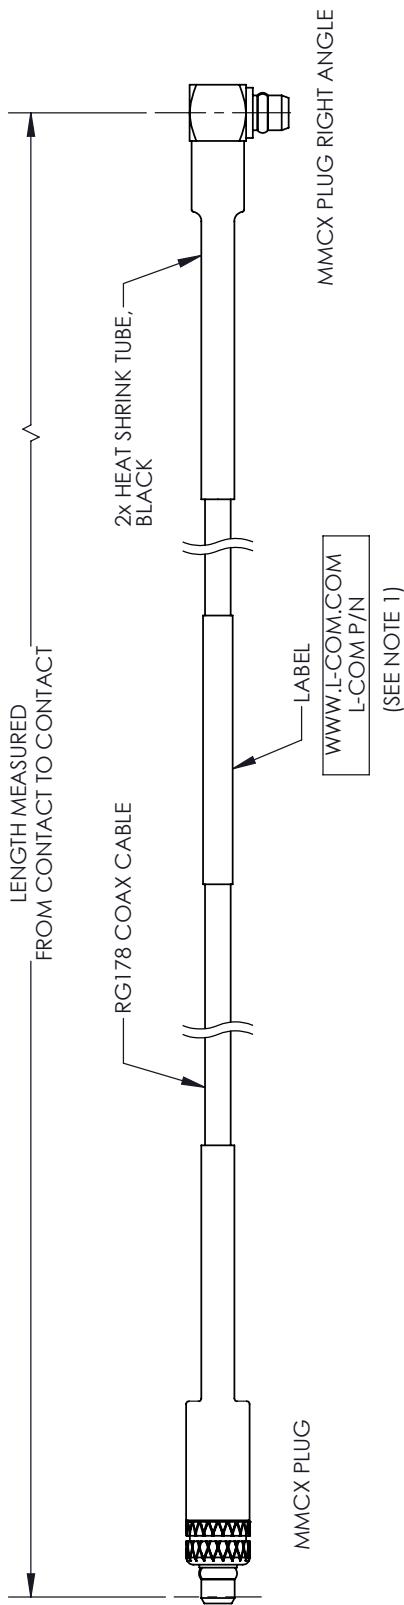

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

REV A
NA
E-mail: CustomerService@L-com.com
PART NUMBER LCCA30066
DRAWN BY MV/ERAPPAN
CAGE CODE 43321
SIZE A
-0 5621/-0
L-com L-0

ALL DIMENSIONS SHOW
ARE FOR REFERENCE ONLY

NOTES:

1. CABLES 36" AND UNDER HAVE 1 LABEL CENTERED.
CABLES OVER 36" HAVE 2 LABELS, ONE AT EACH END,
60" FROM THE FRONT OF THE CONNECTOR

THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS, DIVERSION CONTRARY TO U.S. LAW PROHIBITED.