

75 Ohm 12G SDI BNC Male to BNC Male Cable
Assembly using 4694R-GR Coax, 3 FT



LCCA30725/GR-FT3

Configuration


- Connector 1: BNC Male
- Connector 2: BNC Male
- Cable Type: 4694R-GR

Features

- Meets SMPTE ST 2082-1
- Backwards Compatible with 2081-1
- 12Gb/s Transmission
- Cost Effective

Applications

- 12G-SDI, Video, and Broadband UHDTV
- Broadband Internet Delivery
- Broadcast A/V
- 4K/8K Video Equipment
- Medical Equipment Requiring High Speed Video
- HD Cameras

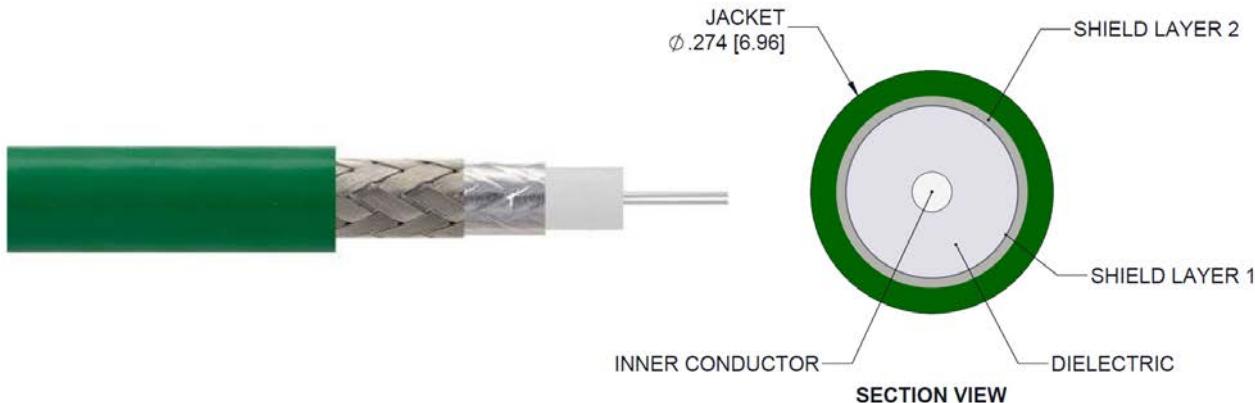

Description

L-com's LCCA30725/GR-FT3 is a 75 Ohm 12G SDI BNC male to BNC male cable assembly using 4694R-GR coax, 3 FT and ships same-day. These flexible RF cable assemblies are ideal for applications where flexure is required. Our L-com BNC to BNC cable assembly has a male to male gender configuration with 75 Ohm flexible 4694R-GR series coax and operates to 12 GHz. The shielding of this BNC cable is comprised of aluminum polyester.

Custom versions of this BNC male to BNC male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30725/GR-FT3 L-com 75 Ohm 12G SDI BNC Male to BNC Male Cable Assembly using 4694R-GR Coax, 3 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	DC		12	GHz
VSWR			1.5:1	

75 Ohm 12G SDI BNC Male to BNC Male Cable
Assembly using 4694R-GR Coax, 3 FT



LCCA30725/GR-FT3

Velocity of Propagation	84.5	%
Group Delay	1.2 [3.94]	ns/ft [ns/m]
Capacitance	15.9 [52.17]	pF/ft [pF/m]
Inductance	0.106 [0.35]	uH/ft [uH/m]
DC Resistance Inner Conductor	6.4 [21]	Ohms/1000ft [Ohms/Km]
DC Resistance Outer Conductor	2.8 [9.19]	Ohms/1000ft [Ohms/Km]
Operating Voltage (AC)	300	Vrms

Specifications by Frequency

Description	F1	F2	F3	F4	F5	Units
Frequency	0.5	1	2.5	5	12	GHz
Insertion Loss (Typ.)	0.33	0.38	0.49	0.62	0.89	dB

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax and connectors used in this assembly. The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

Length	36 in [914.4 mm]
Diameter	0.5 in [12.7 mm]
Weight	0.1 lbs [45.36 g]

Cable

Cable Type	4694R-GR
Impedance	75 Ohms
Inner Conductor Type	Solid
Inner Conductor Material and Plating	Copper, Silver
Dielectric Type	HDPE
Number of Shields	1
Shield Layer 1	Aluminum Polyester
Shield Layer 2	Tinned Copper
Jacket Material	PVC, Green
Jacket Diameter	0.274 in [6.96 mm]

75 Ohm 12G SDI BNC Male to BNC Male Cable
Assembly using 4694R-GR Coax, 3 FT



LCCA30725/GR-FT3

Connectors

Description	Connector 1	Connector 2
Type	BNC Male	BNC Male
Impedance	75 Ohms	75 Ohms
Contact Material and Plating	Brass, Gold	Brass, Gold
Contact Plating Specification	10 μ in minimum	10 μ in minimum
Dielectric Type	PTFE	PTFE
Outer Conductor Material and Plating	Brass, Nickel	Brass, Nickel
Outer Conductor Plating Specification	50 μ in minimum	50 μ in minimum
Body Material and Plating	Brass, Nickel	Brass, Nickel
Body Plating Specification	100 μ in minimum	100 μ in minimum
Seal Gasket Material	Silicone	

Environmental Specifications

Temperature

Operating Range

-30 to +75 deg C

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.


75 Ohm 12G SDI BNC Male to BNC Male Cable
Assembly using 4694R-GR Coax, 3 FT



LCCA30725/GR-FT3

How to Order

Part Number Configuration:

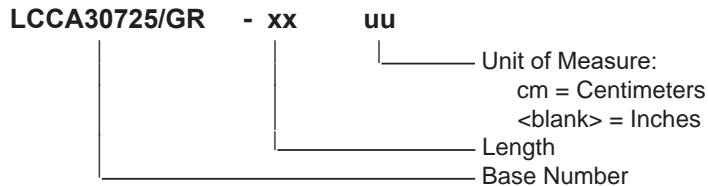


Example: LCCA30725/GR-12 = 12 inches long cable
LCCA30725/GR-100cm = 100 cm long cable

75 Ohm 12G SDI BNC Male to BNC Male Cable Assembly using 4694R-GR Coax, 3 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

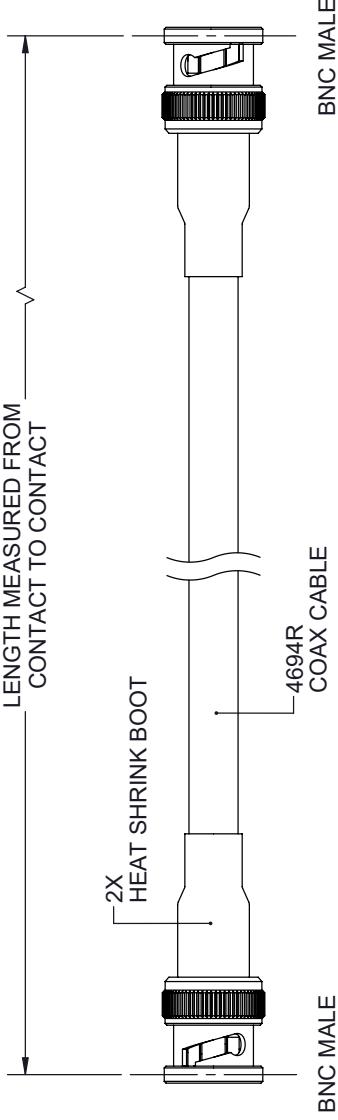REV.		DESCRIPTION		DATE	APPROVED																																																						
A		INITIAL RELEASE		4/29/22	AGANWANI																																																						
																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th colspan="2" style="text-align: center;">LCCAA30725/ZZ (ZZ = CABLE COLOR DESIGNATION)</th> <th colspan="2" style="text-align: center;">COAX CABLE COLOR</th> <th colspan="2"></th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">LCCAA30725/BK</td> <td></td> <td style="text-align: center;">BLACK</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/BL</td> <td></td> <td style="text-align: center;">BLUE</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/GR</td> <td></td> <td style="text-align: center;">GREEN</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/OR</td> <td></td> <td style="text-align: center;">ORANGE</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/RD</td> <td></td> <td style="text-align: center;">RED</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/VL</td> <td></td> <td style="text-align: center;">VIOLET</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/WH</td> <td></td> <td style="text-align: center;">WHITE</td> <td></td> <td></td> <td></td> </tr> <tr> <td style="text-align: center;">LCCAA30725/YW</td> <td></td> <td style="text-align: center;">YELLOW</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>						LCCAA30725/ZZ (ZZ = CABLE COLOR DESIGNATION)		COAX CABLE COLOR				LCCAA30725/BK		BLACK				LCCAA30725/BL		BLUE				LCCAA30725/GR		GREEN				LCCAA30725/OR		ORANGE				LCCAA30725/RD		RED				LCCAA30725/VL		VIOLET				LCCAA30725/WH		WHITE				LCCAA30725/YW		YELLOW			
LCCAA30725/ZZ (ZZ = CABLE COLOR DESIGNATION)		COAX CABLE COLOR																																																									
LCCAA30725/BK		BLACK																																																									
LCCAA30725/BL		BLUE																																																									
LCCAA30725/GR		GREEN																																																									
LCCAA30725/OR		ORANGE																																																									
LCCAA30725/RD		RED																																																									
LCCAA30725/VL		VIOLET																																																									
LCCAA30725/WH		WHITE																																																									
LCCAA30725/YW		YELLOW																																																									
<div style="border: 1px solid black; padding: 5px; width: 100%;"> <p>UNLESS OTHERWISE SPECIFIED LEADING DIMENSIONS ARE INCHES DIMENSIONS IN [] ARE MILLIMETERS</p> <p>TOLERANCES:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; text-align: center;">$X = \pm .2$</td> <td style="width: 30%; text-align: center;">$[5.08]$</td> <td style="width: 30%; text-align: center;">FRACTIONS</td> </tr> <tr> <td>$XX = \pm .02$</td> <td>$[.51]$</td> <td>$\pm .32$</td> </tr> <tr> <td>$XXX = \pm .005$</td> <td>$[.13]$</td> <td>ANGLES $\pm 1^\circ$</td> </tr> </table> <p>CABLE LENGTH (L) TOLERANCES:</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%; text-align: center;">$L \leq 12 [305]$</td> <td style="width: 30%; text-align: center;">$= +1 [25] / -0$</td> <td style="width: 30%; text-align: center;">$12 [305] < L \leq 60 [1524]$</td> <td style="width: 30%; text-align: center;">$= +2 [51] / -0$</td> </tr> <tr> <td>$60 [1524] < L \leq 120 [3048]$</td> <td>$= +4 [102] / -0$</td> <td>$120 [3048] < L \leq 300 [7620]$</td> <td>$= +6 [152] / -0$</td> </tr> <tr> <td>$300 [7620] < L$</td> <td>$= +5\% L / -0$</td> <td></td> <td></td> </tr> </table> </div>						$X = \pm .2$	$[5.08]$	FRACTIONS	$XX = \pm .02$	$[.51]$	$\pm .32$	$XXX = \pm .005$	$[.13]$	ANGLES $\pm 1^\circ$	$L \leq 12 [305]$	$= +1 [25] / -0$	$12 [305] < L \leq 60 [1524]$	$= +2 [51] / -0$	$60 [1524] < L \leq 120 [3048]$	$= +4 [102] / -0$	$120 [3048] < L \leq 300 [7620]$	$= +6 [152] / -0$	$300 [7620] < L$	$= +5\% L / -0$																																			
$X = \pm .2$	$[5.08]$	FRACTIONS																																																									
$XX = \pm .02$	$[.51]$	$\pm .32$																																																									
$XXX = \pm .005$	$[.13]$	ANGLES $\pm 1^\circ$																																																									
$L \leq 12 [305]$	$= +1 [25] / -0$	$12 [305] < L \leq 60 [1524]$	$= +2 [51] / -0$																																																								
$60 [1524] < L \leq 120 [3048]$	$= +4 [102] / -0$	$120 [3048] < L \leq 300 [7620]$	$= +6 [152] / -0$																																																								
$300 [7620] < L$	$= +5\% L / -0$																																																										
<div style="border: 1px solid black; padding: 5px; width: 100%;"> <p>THIRD ANGLE PROJECTION</p>  <p>THE INFORMATION AND DESIGN IN THIS DOCUMENT IS THE PROPERTY OF L-COM GLOBAL. ALL RIGHTS RESERVED.</p> <p>L-COM an INFINITE brand</p> <p>50 High Street, West Mill, 3rd Floor, Suite #30 North Andover, MA 01845 USA Phone: 1.800.341.5266 1.978.682.6936 Fax: 1.978.689.9484 Website: www.L-com.com E-mail: CustomerService@L-com.com</p> <p>SCALE <input type="text" value="N/A"/> OF <input type="text" value="1"/> SHEET <input type="text" value="1"/></p> <p>ITEM NO. <input type="text" value="LCCA30725/ZZ"/> DRAWN BY <input type="text" value="HBAKKE"/> CAGE CODE <input type="text" value="A 43321"/> REV <input type="text" value="A"/></p> </div>																																																											
<p>ALL DIMENSIONS SHOWN ARE FOR REFERENCE ONLY.</p> <p>THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.</p> <p>T-Rev D</p>																																																											