



#### LCCA30091-FT3

### Configuration

Connector 1: SMA MaleConnector 2: SMA MaleCable Type: LC141TBJ


#### **Features**

- Max Frequency 18 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 70% VoP

#### **Applications**

- General Purpose
- · Laboratory Use

- Hand Formable
- Tin Filled Copper Braid Outer Conductor
- FEP Jacket
- · System Interconnect

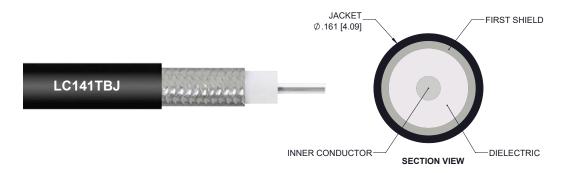

#### **Description**

L-com's LCCA30091-FT3 is a SMA male to SMA male cable assembly using LC141TBJ coax, 3 FT and ships same-day. The LC141TBJ coax of this SMA cable uses the PTFE dielectric with a VoP of 70%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com SMA to SMA cable assembly has a male to male gender configuration with formable LC141TBJ series coax and operates to 18 GHz. The jacketed tinned copper braid outer conductor is easily formed by hand with an overall diameter of 0.161 inches and excellent shielding effectiveness greater than 100dB.

Custom versions of this SMA male to SMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30091-FT3 L-com SMA Male to SMA Male Cable Assembly using LC141TBJ Coax, 3 FT data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.





## LCCA30091-FT3

## **Electrical Specifications**

Minimum	Typical	Maximum	Units
DC		18	GHz
	70		%
100			dB
	1.43 [4.69]		ns/ft [ns/m]
	29 [95.14]		pF/ft [pF/m]
luctor	8.23 [27]		Ohms/1000ft [Ohms/Km]
		1,900	Vrms
tage (AC)		3,000	Vrms
	DC 100 uctor	DC 70 100 1.43 [4.69] 29 [95.14] uctor 8.23 [27]	DC 70 70 100 1.43 [4.69] 29 [95.14] uctor 8.23 [27] 1,900

# **Specifications by Frequency**

Description	F1	F2	F3	F4	F5	Units
Frequency	1	2	4.5	9	18	GHz
Insertion Loss (Max.)	0.58	0.73	1.09	1.55	2.43	dB

#### **Electrical Specification Notes:**

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly. The Insertion Loss is estimated as 0.1 dB per connector.

### **Mechanical Specifications**

## **Cable Assembly**

 Length
 36 in [914.4 mm]

 Diameter
 0.032 in [0.81 mm]

# Cable

Cable TypeLC141TBJImpedance50 OhmsInner Conductor TypeSolidInner Conductor Material and PlatingCopper, Silver

Dielectric Type PTFE
Number of Shields 0

Outer Conductor Material and Plating Tinned Copper Braid
Outer Conductor Diameter 0.139 in [3.53 mm]

Jacket Material FEP

Jacket Diameter 0.161 in [4.09 mm]

One Time Minimum Bend Radius 0.315 in [8 mm]





# LCCA30091-FT3

Repeated Minimum Bend Radius

1.575 in [40.01 mm]

### **Connectors**

Description	Connector 1	Connector 2		
Туре	SMA Male	SMA Male		
Impedance	50 Ohms	50 Ohms		
Body Material and Plating	Brass, Gold over Nickel	Brass, Gold over Nickel		
Coupling Nut Material and Plating	Passivated Stainless Steel	Passivated Stainless Steel		
Hex Size	5/16 inch	5/16 inch		
Torque	10 in-lbs 1.13 Nm	10 in-lbs 1.13 Nm		

### **Environmental Specifications**

**Temperature** 

Operating Range -65 to +150 deg C

Compliance Certifications (see product page for current document)

### **Plotted and Other Data**

Notes:


• Values at 25°C, sea level.





#### LCCA30091-FT3

#### **How to Order**



Example: LCCA30091-12 = 12 inches long cable LCCA30091-100cm = 100 cm long cable

SMA Male to SMA Male Cable Assembly using LC141TBJ Coax, 3 FT from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

# **L-com CAD Drawing**

