

## SMA Male Right Angle to TNC Male Right Angle Cable Assembly using LC085TBJ Coax, 10 FT with HeatShrink



### LCCA30625-FT10

#### Configuration


- Connector 1: SMA Male Right Angle
- Connector 2: TNC Male Right Angle
- Cable Type: LC085TBJ

#### Features

- Max Frequency 6 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.5% VoP
- Hand Formable
- Tin Filled Copper Composite Braid Outer Conductor
- FEP Jacket

#### Applications

- General Purpose
- Laboratory Use
- System Interconnect

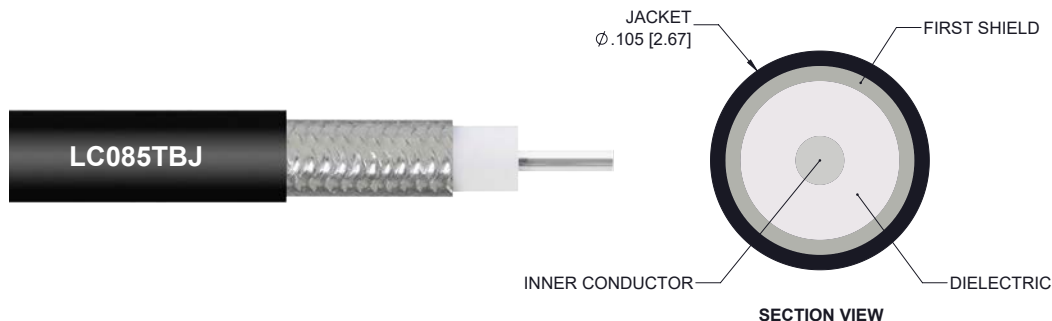

#### Description

L-com's LCCA30625-FT10 is a SMA male right angle to TNC male right angle cable assembly using LC085TBJ coax, 10 FT with heatshrink and ships same-day. The LC085TBJ coax of this SMA cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com SMA to TNC cable assembly has a male to male gender configuration with formable LC085TBJ series coax and operates to 6 GHz. The jacketed tinned copper composite braid outer conductor is easily formed by hand with an overall diameter of 0.105 inches and excellent shielding effectiveness greater than 100dB. This right angle SMA and TNC cable interface on the LC085TBJ coax allows for easier connections in tight spaces.

Custom versions of this SMA male to SMA male cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30625-FT10 L-com SMA Male Right Angle to TNC Male Right Angle Cable Assembly using LC085TBJ Coax, 10 FT with HeatShrink data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

SMA Male Right Angle to TNC Male Right Angle Cable  
Assembly using LC085TBJ Coax, 10 FT with HeatShrink



## LCCA30625-FT10

### Electrical Specifications

| Description                   | Minimum | Typical       | Maximum | Units                 |
|-------------------------------|---------|---------------|---------|-----------------------|
| Frequency Range               | DC      |               | 6       | GHz                   |
| VSWR                          |         |               | 1.45:1  |                       |
| Velocity of Propagation       |         | 69.5          |         | %                     |
| RF Shielding                  | 100     |               |         | dB                    |
| Group Delay                   |         | 1.43 [4.69]   |         | ns/ft [ns/m]          |
| Capacitance                   |         | 29 [95.14]    |         | pF/ft [pF/m]          |
| DC Resistance Inner Conductor |         | 65.7 [215.55] |         | Ohms/1000ft [Ohms/Km] |
| DC Resistance Outer Conductor |         | 10.2 [33.46]  |         | Ohms/1000ft [Ohms/Km] |

### Specifications by Frequency

| Description           | F1  | F2  | F3  | F4  | F5 | Units |
|-----------------------|-----|-----|-----|-----|----|-------|
| Frequency             | 0.5 | 1   | 2.5 | 6   |    | GHz   |
| Insertion Loss (Typ.) | 1.9 | 2.7 | 3.9 | 5.6 |    | dB    |

#### Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly.  
The Insertion Loss includes an estimated insertion loss of 0.2 dB per connector.

### Mechanical Specifications

#### Cable Assembly

|          |                     |
|----------|---------------------|
| Length   | 120 in [304.8 cm]   |
| Diameter | 0.591 in [15.01 mm] |

#### Cable

|                                      |                               |
|--------------------------------------|-------------------------------|
| Cable Type                           | LC085TBJ                      |
| Impedance                            | 50 Ohms                       |
| Inner Conductor Type                 | Solid                         |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver     |
| Dielectric Type                      | PTFE                          |
| Number of Shields                    | 1                             |
| Outer Conductor Material and Plating | Tinned Copper Composite Braid |
| Jacket Material                      | FEP, Black                    |
| Jacket Diameter                      | 0.105 in [2.67 mm]            |
| One Time Minimum Bend Radius         | 0.5 in [12.7 mm]              |
| Repeated Minimum Bend Radius         | 0.787 in [19.99 mm]           |

SMA Male Right Angle to TNC Male Right Angle Cable  
Assembly using LC085TBJ Coax, 10 FT with HeatShrink



## LCCA30625-FT10

### Connectors

| Description                       | Connector 1                | Connector 2             |
|-----------------------------------|----------------------------|-------------------------|
| Type                              | SMA Male Right Angle       | TNC Male Right Angle    |
| Impedance                         | 50 Ohms                    | 50 Ohms                 |
| Contact Material and Plating      | Brass, Gold over Nickel    | Brass, Gold over Nickel |
| Contact Plating Specification     | 0.2 µin minimum            |                         |
| Dielectric Type                   | PTFE                       | PTFE                    |
| Body Material and Plating         | Brass, Gold over Nickel    | Brass, Nickel           |
| Body Plating Specification        | 0.1 µin minimum            |                         |
| Coupling Nut Material and Plating | Passivated Stainless Steel | Brass, Nickel           |
| Hex Size                          | 5/16 inch                  |                         |
| Torque                            | 8 in-lbs 0.9 Nm            |                         |

**Compliance Certifications** (see [product page](#) for current document)

### Plotted and Other Data

Notes:

SMA Male Right Angle to TNC Male Right Angle Cable  
Assembly using LC085TBJ Coax, 10 FT with HeatShrink



## LCCA30625-FT10

### How to Order

Part Number Configuration:

**LCCA30625**

- **xx**

**uu**

Unit of Measure:  
cm = Centimeters  
<blank> = Inches  
Length  
Base Number

Example: LCCA30625-12 = 12 inches long cable  
LCCA30625-100cm = 100 cm long cable

SMA Male Right Angle to TNC Male Right Angle Cable Assembly using LC085TBJ Coax, 10 FT with HeatShrink from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document. The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to implement improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

