

SMA Male to N Female Bulkhead Semi-Flexible Cable Assembly using LC085TBJ Coax, 2 FT , LF Solder

LCCA30608-FT2



Configuration


- Connector 1: SMA Male
- Connector 2: N Female Bulkhead
- Cable Type: LC085TBJ

Features

- Max Frequency 10 GHz
- Shielding Effectivity > 100dB
- PTFE Dielectric with 69.5% VoP
- Hand Formable
- Tin Filled Copper Composite Braid Outer Conductor
- FEP Jacket

Applications

- General Purpose
- Laboratory Use
- System Interconnect

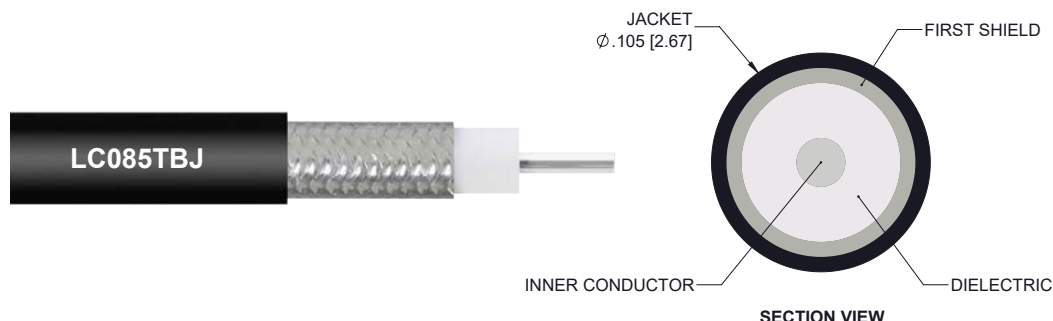

Description

L-com's LCCA30608-FT2 is a SMA male to N female bulkhead semi-flexible cable assembly using LC085TBJ coax, 2 FT , LF solder and ships same-day. The LC085TBJ coax of this SMA cable uses the PTFE dielectric with a VoP of 69.5%. These formable RF cable assemblies are a great alternative to expensive semi-rigid assemblies because they can be hand formed to fit specific designs. Our L-com SMA to N cable assembly has a male to female gender configuration with formable LC085TBJ series coax and operates to 10 GHz. The jacketed outer conductor is easily formed by hand with an overall diameter of 0.105 inches and excellent shielding effectiveness greater than 100dB. L-com's RF cable assembly with N bulkhead interface enables system designers to have external connections on their product enclosures or to be used for other rack mount and panel mount applications.

Custom versions of this SMA male to SMA female cable, along with the rest of L-com's other RF assemblies, can also be built and shipped same day. Other available RF cable assembly value added services from L-com include connector orientation or clocking, heat shrink booting and custom labeling. RF testing can also be performed to document the electrical performance of your cable assembly. Contact a sales representative for testing or custom RF cable quotes. Part number LCCA30608-FT2 L-com SMA Male to N Female Bulkhead Semi-Flexible Cable Assembly using LC085TBJ Coax, 2 FT , LF Solder data sheet PDF includes details of the RF product specifications, CAD drawing(s) and dimensions below.

SMA Male to N Female Bulkhead Semi-Flexible Cable
Assembly using LC085TBJ Coax, 2 FT , LF Solder



LCCA30608-FT2

Electrical Specifications

| Description | Minimum | Typical | Maximum | Units |
|-------------------------|---------|-------------|---------|--------------|
| Frequency Range | DC | | 10 | GHz |
| VSWR | | | 1.45:1 | |
| Velocity of Propagation | | 69.5 | | % |
| RF Shielding | 100 | | | dB |
| Group Delay | | 1.43 [4.69] | | ns/ft [ns/m] |
| Capacitance | | 29 [95.14] | | pF/ft [pF/m] |

Specifications by Frequency

| Description | F1 | F2 | F3 | F4 | F5 | Units |
|-----------------------|-----|------|-----|-----|------|-------|
| Frequency | 0.5 | 1 | 2.5 | 5 | 10 | GHz |
| Insertion Loss (Typ.) | 0.5 | 0.66 | 0.9 | 1.3 | 1.82 | dB |

Electrical Specification Notes:

The Insertion Loss data above is based on the performance specifications of the coax cable and connectors used in this assembly.
The Insertion Loss includes an estimated insertion loss of 0.1 dB per connector.

Mechanical Specifications

Cable Assembly

| | |
|----------|---------------------|
| Length | 24 in [609.6 mm] |
| Diameter | 0.866 in [22 mm] |
| Weight | 0.107 lbs [48.53 g] |

Cable

| | |
|--------------------------------------|---------------------------|
| Cable Type | LC085TBJ |
| Impedance | 50 Ohms |
| Inner Conductor Type | Solid |
| Inner Conductor Material and Plating | Copper Clad Steel, Silver |
| Dielectric Type | PTFE |
| Number of Shields | 1 |
| Shield Layer 1 | Tinned Copper Braid |
| Jacket Material | FEP, Black |
| Jacket Diameter | 0.105 in [2.67 mm] |
| One Time Minimum Bend Radius | 0.236 in [5.99 mm] |
| Repeated Minimum Bend Radius | 0.787 in [19.99 mm] |

SMA Male to N Female Bulkhead Semi-Flexible Cable
Assembly using LC085TBJ Coax, 2 FT , LF Solder



LCCA30608-FT2

Connectors

| Description | Connector 1 | Connector 2 |
|-----------------------------------|----------------------------|-----------------------|
| Type | SMA Male | N Female Bulkhead |
| Impedance | 50 Ohms | 50 Ohms |
| Contact Material and Plating | Brass, Gold | Phosphor Bronze, Gold |
| Dielectric Type | PTFE | PTFE |
| Body Material and Plating | Brass, Gold | Brass, Nickel |
| Coupling Nut Material and Plating | Passivated Stainless Steel | |
| Hex Size | 5/16 in. | |
| Torque | 8 in-lbs 0.9 Nm | |

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at 25°C, sea level.

SMA Male to N Female Bulkhead Semi-Flexible Cable
Assembly using LC085TBJ Coax, 2 FT , LF Solder



LCCA30608-FT2

How to Order

Part Number Configuration:

LCCA30608

- xx

uu

Unit of Measure:
cm = Centimeters
<blank> = Inches
Length
Base Number

Example: LCCA30608-12 = 12 inches long cable
LCCA30608-100cm = 100 cm long cable

SMA Male to N Female Bulkhead Semi-Flexible Cable Assembly using LC085TBJ Coax, 2 FT , LF Solder from L-com has same day shipment for domestic and International orders. L-com is a leading manufacturer of wired and wireless connectivity products and committed to in-stock availability and same day shipping. Our portfolio includes coaxial cable assemblies, connectors, adapters and custom products as well as lightning and surge protectors, NEMA rated enclosures, and an RF product line which includes antennas, amplifiers, passive, and active components.

The information contained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.ontained within this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part in order to impliment improvements. L-com reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. L-com does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and L-com does not assume liability arising out of the use of any part or document.

L-com CAD Drawing

