

客户 ( Customer ) : \_\_\_\_\_

## 承认书

## Approval Sheet

谨致执事者：兹提供敝公司之有关详细规格及图面数据,敬请给予办理试认定手续.

同时敬请送返一份附有贵公司签认之测试认定后之样品承认书.

We are pleased in sending you herewith on specification and drawings for your approval.  
Please return to us one copy "Approval sheet" with your approved signature.

型号 ( Model No. ) : A-SP1922AGHR6AC-C01-2T

发文日期 ( Issue Date ) : 2018/07/27 承认日期 ( Approved Date ) : \_\_\_\_\_

### Checking signature of Amicc

| Designer | Checker | Approver |
|----------|---------|----------|
| Wangyuqi |         |          |

### Approval signature of customer

| Designer | Checker | Approver |
|----------|---------|----------|
|          |         |          |

江苏欧密格光电科技股份有限公司

Jiangsu Amicc Opto-Electronics Technology Co.,Ltd.

地址:江苏省常州市武进区武南中路 98 号


Add: 98.Wu Nan Road, Wujin, Changzhou city, Jiangsu Province

TEL:0086-519-89806999

FAX:0086-519-86523668

## Multi-Color Type ■ Top view Bi-color

### A-SP1922AGHR6AC-C01-2T

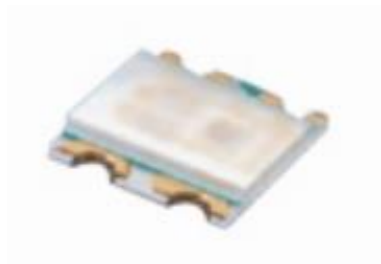

#### Features

- Multi-Color Type
- Compatible with infrared and vapor phase reflow solder process.
- Wide viewing angle
- Pb-free
- RoHS compliant
- JEDEC MSL 2

#### Description

- The Amicc 1922A SMD LED is much smaller than lead frame type components ,thus enable smaller board size, higher packing density ,reduced storage space and finally smaller equipment to be obtained.
- Besides ,lightweight makes them ideal for miniature applications etc.

#### Applications

- LCD Back-light
- Decorative and Entertainment Lighting
- Indicators
- Automotive Telecommunication
- Switch lights

#### Device Selection Guide

| Type | Chip Materials | Emitted Color | Resin Color |
|------|----------------|---------------|-------------|
| GH   | InGaN          | Green         | Water Clean |
| R6A  | AlGaInP        | Red           |             |

**Absolute Maximum Ratings (T<sub>Soldering</sub>=25°C)**

| Parameter                                | Symbol           | Color  | Rating  | Unit |
|--|------------------|--------|---|------|
| Reverse Voltage                          | V <sub>R</sub>   | GH/R6A | 5   | V    |
| Forward Current                          | I <sub>F</sub>   | GH/R6A | 25  | mA   |
| Peak Forward Current<br>(Duty 1/10 @1ms) | I <sub>FP</sub>  | GH     | 60  | mA   |
|  |                  | R6A    | 60  |      |
| Power Dissipation                        | P <sub>d</sub>   | GH     | 90  | mW   |
|  |                  | R6A    | 60  |      |
| Operating Temperature                    | T <sub>opr</sub> |        | -40~+85   | °C   |
| Storage Temperature                      | T <sub>stg</sub> |        | -40~+100  | °C   |
| Soldering Temperature                    | T <sub>sol</sub> |        | Reflow Soldering : 260 °C for 10 sec.<br>Hand Soldering : 350 °C for 3 sec. |      |

**Electro-Optical Characteristics (T<sub>Soldering</sub>=25°C)**

| Parameter           | Symbol            | Color | Min.  | Typ.  | Max.  | Unit | Condition           |
|---------------------|-------------------|-------|-------|-------|-------|------|---------------------|
| Luminous Intensity  | I <sub>v</sub>    | GH    | 180   | ----- | 450   | mcd  | I <sub>F</sub> =5mA |
|                     |                   | R6A   | 90    | ----- | 225   |      |                     |
| Viewing Angle       | 2θ <sub>1/2</sub> |       | ----- | 130   | ----- | deg  | I <sub>F</sub> =5mA |
| Peak Wavelength     | λ <sub>p</sub>    | GH    | ----- | 516   | ----- | nm   | I <sub>F</sub> =5mA |
|                     |                   | R6A   | ----- | 632   | ----- |      |                     |
| Dominant Wavelength | λ <sub>d</sub>    | GH    | 520   | ----- | 535   | nm   | I <sub>F</sub> =5mA |
|                     |                   | R6A   | 615   | ----- | 625   |      |                     |
| Forward Voltage     | V <sub>F</sub>    | GH    | 2.2   | ----- | 2.8   | V    | I <sub>F</sub> =5mA |
|                     |                   | R6A   | 1.8   | ----- | 2.3   |      |                     |
| Reverse Current     | I <sub>R</sub>    | GH    | ----- | ----- | 10    | μA   | V <sub>R</sub> =5V  |
|                     |                   | R6A   | ----- | ----- | 10    |      |                     |

Notes:

1. Tolerance of Luminous Intensity ±10%.
2. Tolerance of Dominant Wavelength: ±1nm
3. Tolerance of Forward Voltage: ±0.1V.

**Bin Range of Luminous Intensity**

**GH:**

| Bin Code | Min. | Max. | Unit | Condition           |
|----------|------|------|------|---------------------|
| S        | 180  | 285  | mcd  | I <sub>F</sub> =5mA |
| T        | 285  | 450  |      |                     |

Note:

Tolerance of Luminous Intensity: ±10%.

**R6A:**

| Bin Code | Min. | Max. | Unit | Condition           |
|----------|------|------|------|---------------------|
| QA       | 90   | 140  | mcd  | I <sub>F</sub> =5mA |
| RA       | 140  | 225  |      |                     |

Note:

Tolerance of Luminous Intensity: ±10%.

**GH: Bin Range of Dominant Wavelength**


| Bin Code | Min. | Max. | Unit | Condition           |
|----------|------|------|------|---------------------|
| A5       | 520  | 525  | nm   | I <sub>F</sub> =5mA |
| A6       | 525  | 530  |      |                     |
| A7       | 530  | 535  |      |                     |

Note:


Tolerance of Dominant Wavelength: ±1nm

## Spectrum Distribution

**GH:**

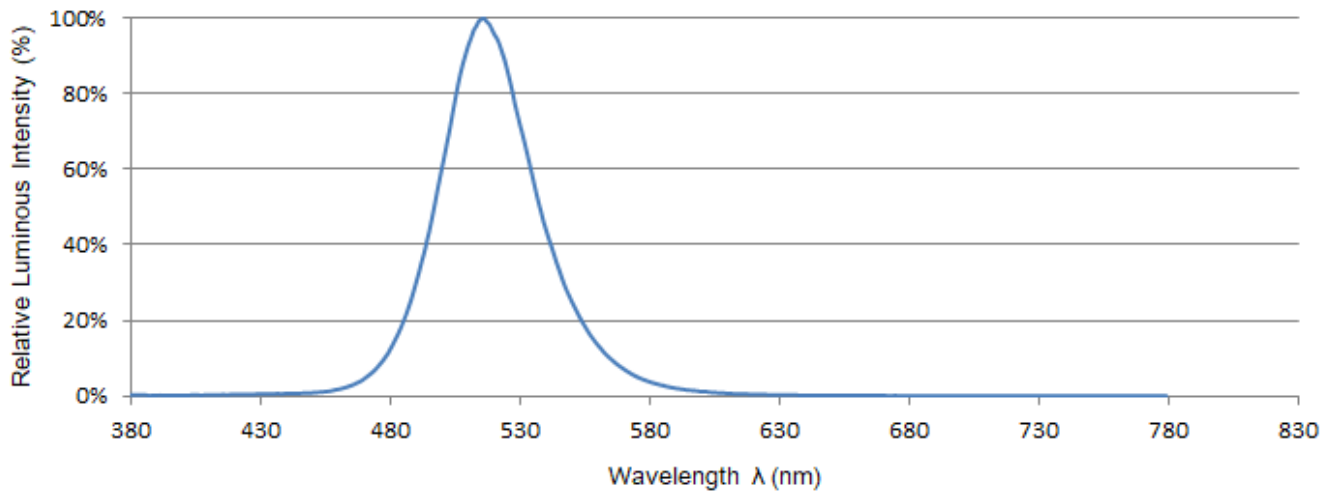

**R6A:**

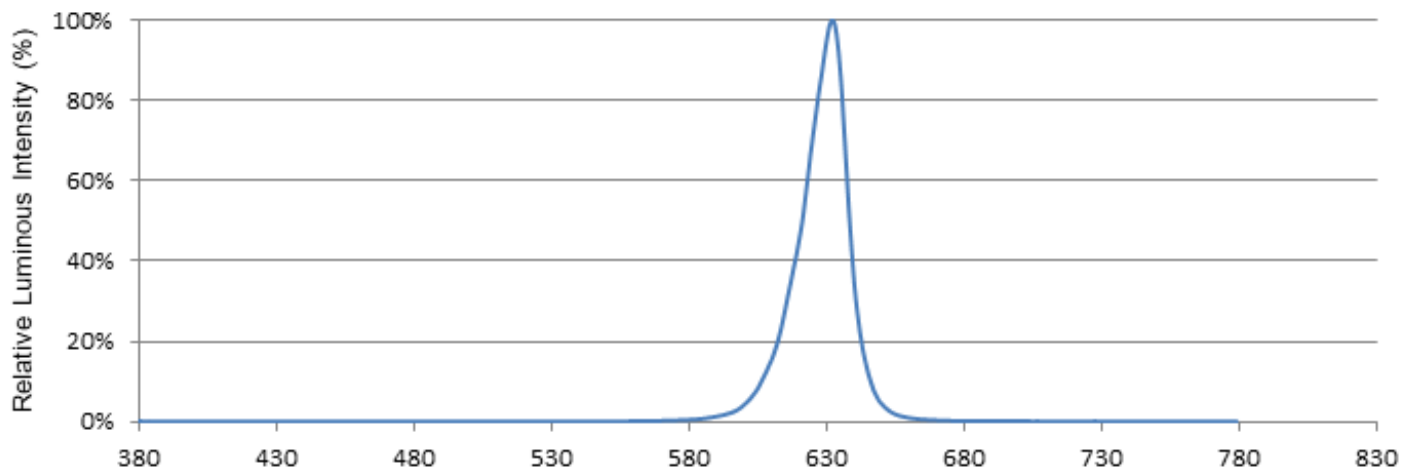

**Typical Electro-Optical Characteristics Curve  
 R6A:**

Fig.1-Forward Voltage Shift vs. Junction Temperature

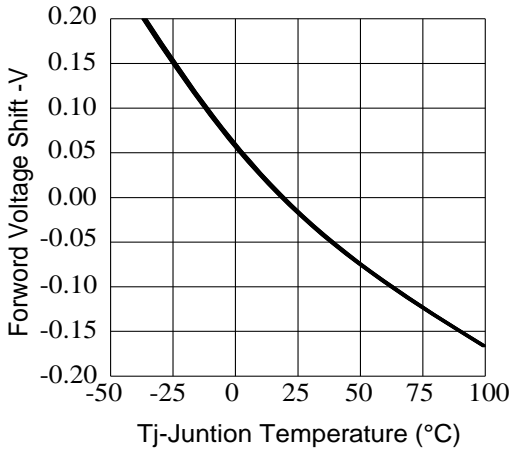


Fig.2-Relative Luminous Intensity vs. Forward Current  
 T<sub>s</sub>=25°C

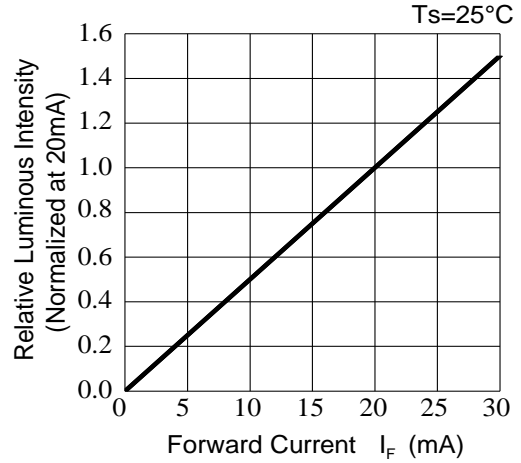


Fig.3-Relative Luminous Intensity vs. Junction Temperature

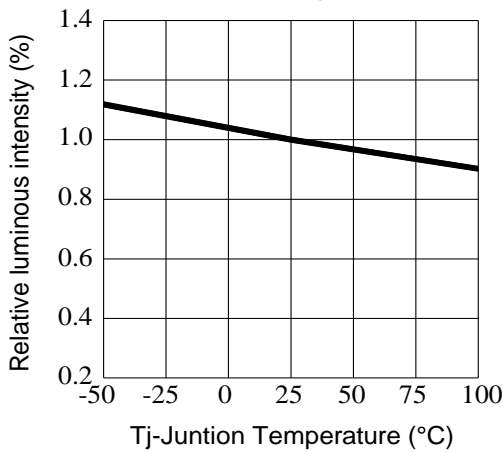


Fig.4-Forward Current vs. Forward Voltage  
 T<sub>a</sub>=25°C

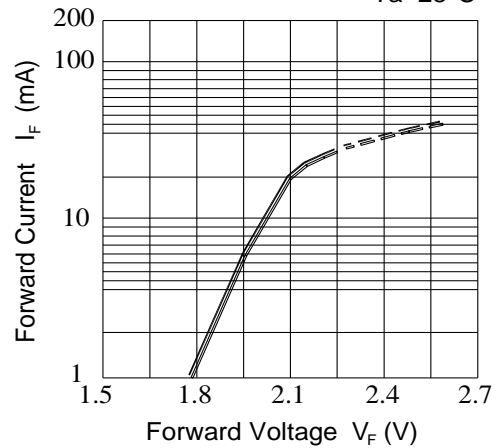


Fig.5-Max. Driving Forward Current vs. Soldering Temperature


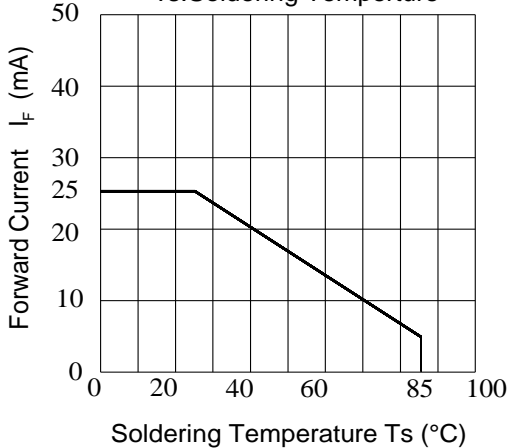


Fig.6-Radiation Diagram T<sub>a</sub>=25°C

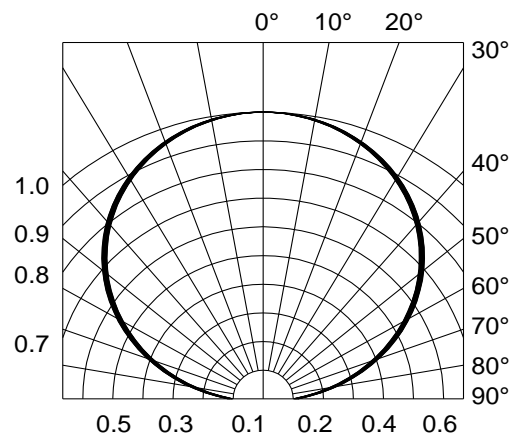

**Typical Electro-Optical Characteristics Curve  
 GH:**

Fig.1-Forward Voltage Shift vs. Junction Temperature

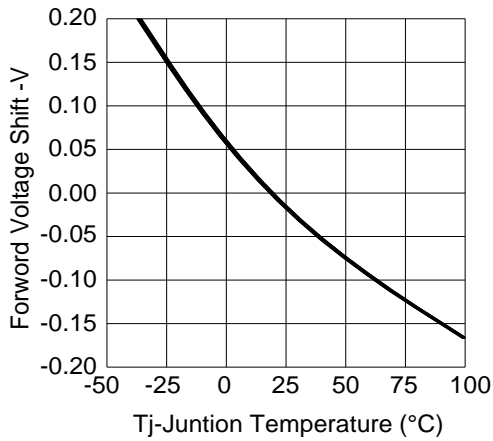


Fig.2-Relative Luminous Intensity vs. Forward Current Ts=25°C

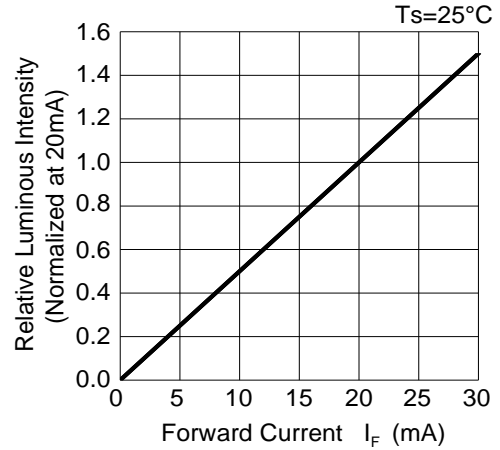


Fig.3-Relative Luminous Intensity vs. Junction Temperature

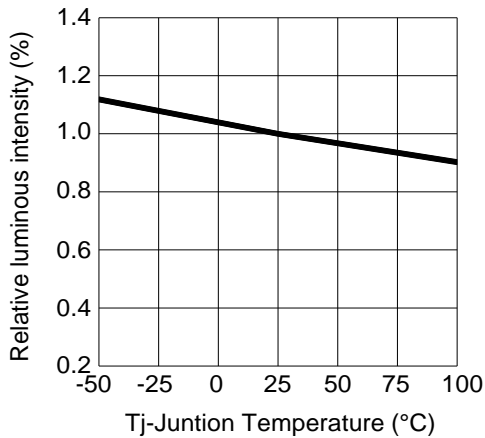


Fig.4-Forward Current vs. Forward Voltage Ta=25°C

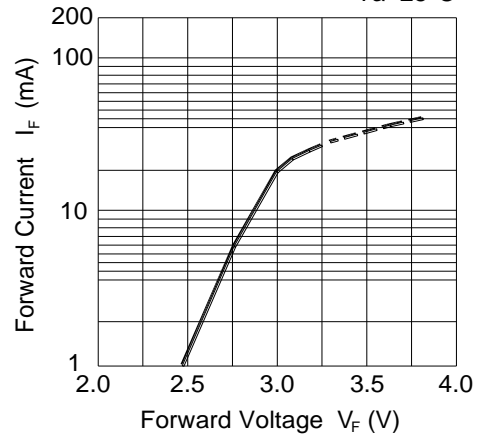


Fig.5-Max. Driving Forward Current vs. Soldering Temperature





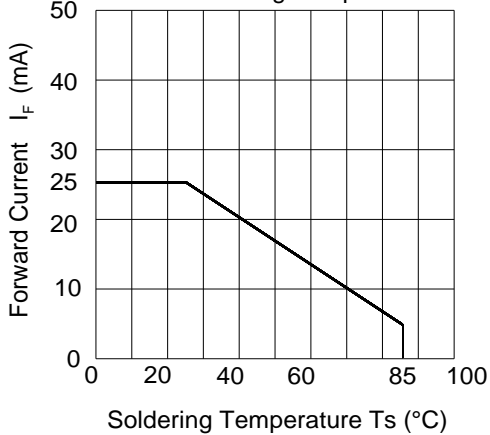




Fig.6-Radiation Diagram Ta=25°C

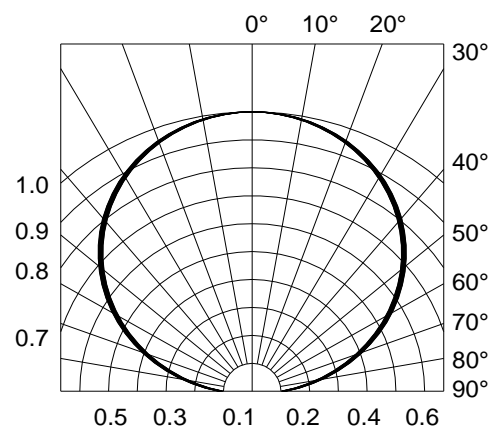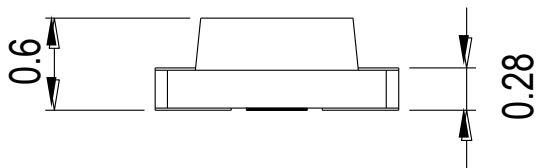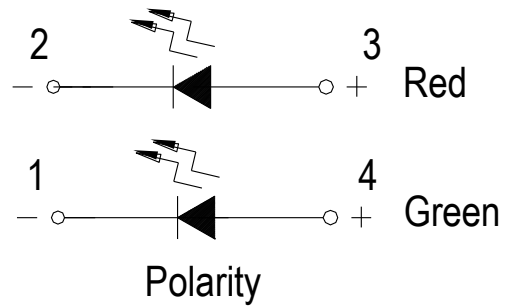

**Package Dimension**

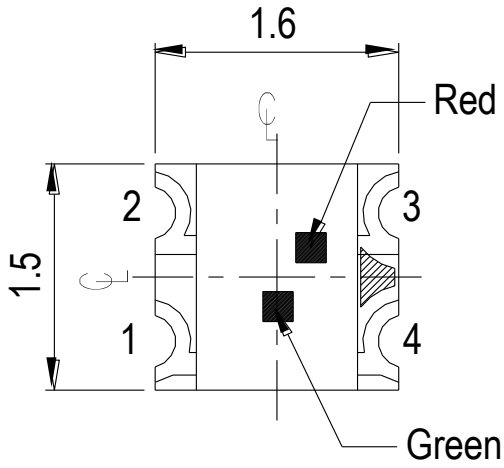

**Recommended Solder Pad**

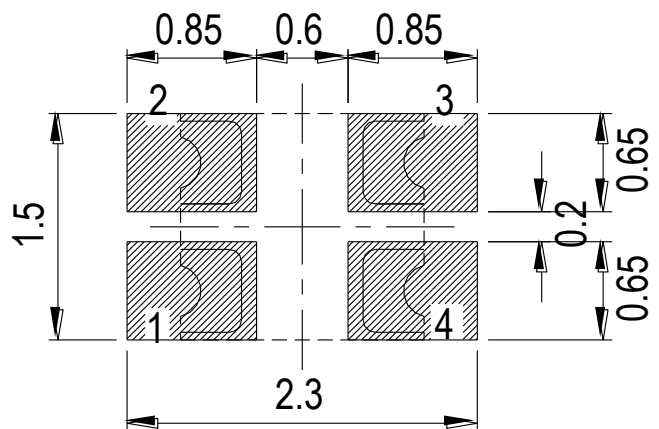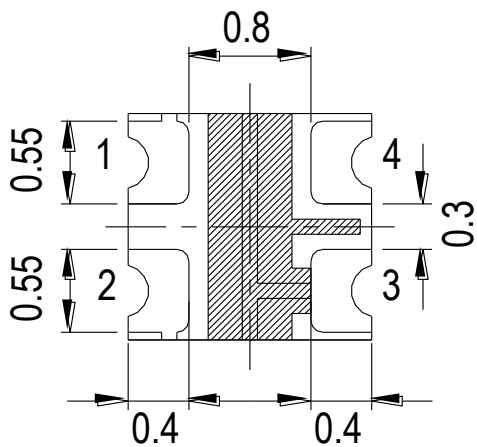


Note:  
 Tolerance unless mentioned is  $\pm 0.1$ mm, Unit = mm.




**Moisture Resistant Packing Materials**

**Label Explanation**

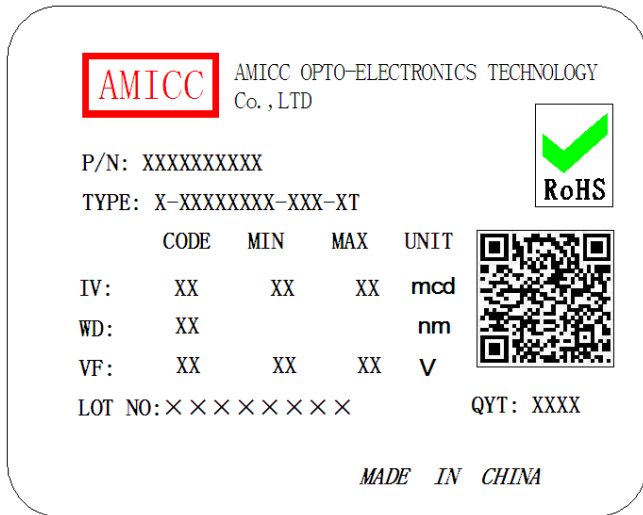


- CPN: Customer's Product Number
- P/N: Product Number
- TYPE :Part NO.
- IV: Radiant Intensity Rank
- WD: Peak Wavelength
- VF: Forward Voltage Rank
- LOT NO.: Lot Number
- QTY: Packing Quantity

**Reel Dimensions**

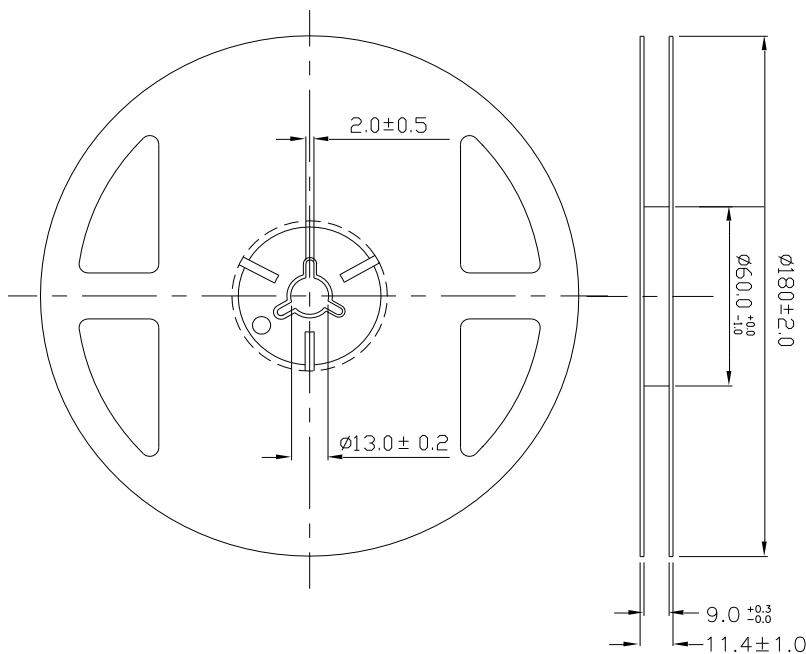

Note:  
 Tolerances unless mentioned  $\pm 0.1$ mm, Unit = mm.


Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel.

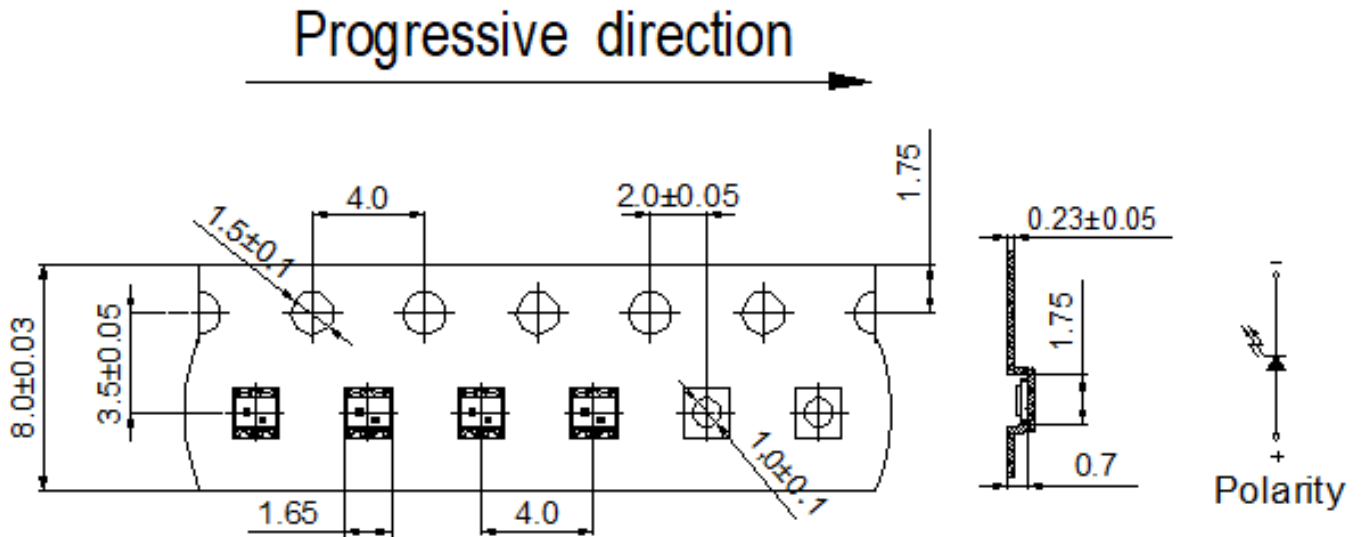

Notes:

1. Tolerance unless mentioned is  $\pm 0.1$ mm, Unit = mm.
2. Minimum packing amount is 1000pcs per reel.

**Moisture Resistant Packing Process**

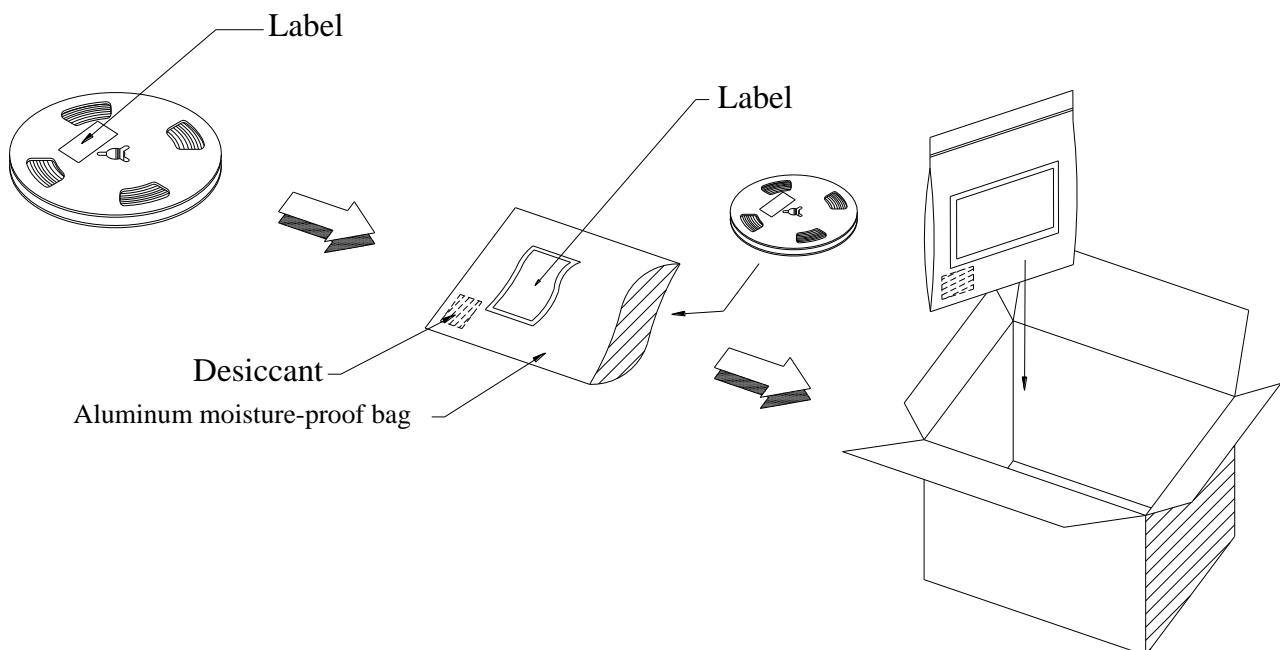

## Reliability Test Items and Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level : 90%

LTPD : 10%

| No. | Items                                     | Test Condition                                 | Test Hours/Cycles | Sample Size | Ac/Re |
|-----|---|--|-------------------|-------------|-------|
| 1   | Reflow Soldering                          | Temp. : 260°C/10sec.                           | 6 Min.            | 22 PCS.     | 0/1   |
| 2   | Thermal Shock                             | H : +100°C 5min<br>§ 10 sec<br>L : -10°C 5min  | 300 Cycles        | 22 PCS.     | 0/1   |
| 3   | Temperature Cycle                         | H : +100°C 15min<br>§ 5 min<br>L : -40°C 15min | 300 Cycles        | 22 PCS.     | 0/1   |
| 4   | High Temperature/Humidity<br>Reverse Bias | Ta=85°C,85%RH                                  | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 5   | Low Temperature Storage                   | Ta=-40°C                                       | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 6   | High Temperature Storage                  | Ta=100°C                                       | 1000 Hrs.         | 22 PCS.     | 0/1   |
| 7   | DC Operation Life                         | Ta=25°C,<br>If = 5 mA                          | 1000 Hrs.         | 22 PCS.     | 0/1   |

## Precautions for Use

### 1. Over-current-proof

Customer must apply resistors for protection; otherwise slight voltage shift will cause big current change (Burn out will happen).

### 2. Storage

2.1 Do not open moisture proof bag before the products are ready to use.

2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.


2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.

2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

Baking treatment: 60±5°C for 24 hours.

### 3. Soldering Condition

#### 3.1 Pb-free solder temperature profile

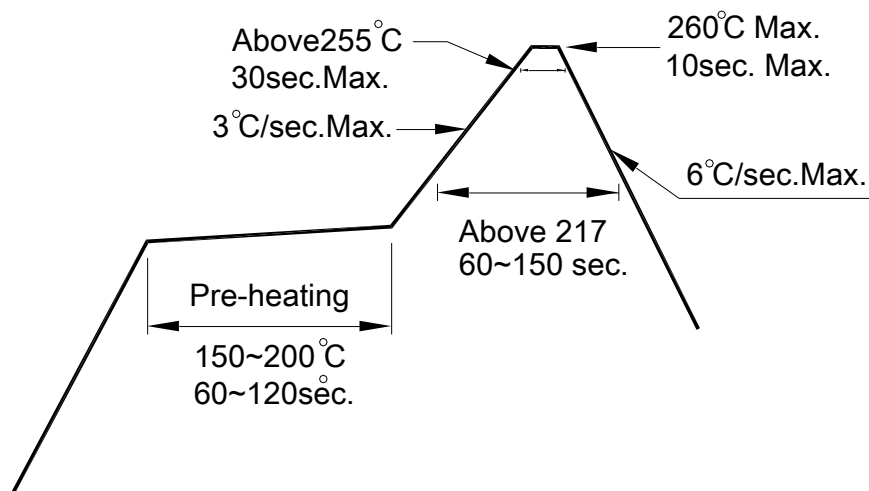

3.2 Reflow soldering should not be done more than two times.

3.3 When soldering, do not put stress on the LEDs during heating.

3.4 After soldering, do not warp the circuit board.

### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

### 5. Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.