

Features

- low insertion loss, 0.3dB typ. @ passband
- high rejection
- shielded case
- aqueous washable

Applications

- transmitters / receivers
- sub-harmonic rejection
- military communications

Electrical Specifications (T_{AMB}= 25° C)

STOP BAND (MHz)		FCO,(MHz) Nom.	PASS BAND (MHz)	VSWR (:1)	
(Loss>40dB) (Loss>20dB)		(Loss 3dB)	(Loss<1dB)	Stopband Typ.	Passband Typ.
DC-65	DC-85	122	200-3000	18	1.2

Typical Performance Data at 25° C


Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1.0	86.54	1786.41
10	86.90	3867.02
50	68.94	225.69
65	50.50	118.64
85	30.98	48.03
95	22.23	28.70
105	13.91	14.95
115	6.66	5.75
120	4.07	3.39
122	3.32	2.78
130	1.60	1.52
150	0.80	1.06
200	0.48	1.10
500	0.23	1.10
750	0.24	1.09
1000	0.24	1.10
2000	0.39	1.24
3000	0.48	1.20

HT-RHP-122+




50Ω 200 to 3000 MHz

Typical Frequency Response



Functional Schematic

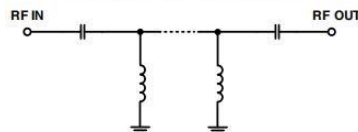

Pin Connections


INPUT	2
OUTPUT	6
GROUND	1, 3, 4, 5, 7, 8

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power Input*	0.5W max. at 25°C

Permanent damage may occur if any of these limits are exceeded.


Outline Drawing

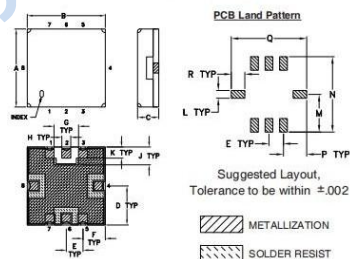

Outline Dimensions: Unit (mm)

A	8.89	B	8.89	C	2.54
D	4.45	E	1.93	F	2.54
G	2.79	H	1.02	J	2.03
K	1.27	L	1.02	M	4.95
N	9.91	P	3.05	Q	9.91
WT		0.25		R	1.78

Demo Board MCL P/N: TB-332 Suggested PCB Layout (PL-176)



NOTES:

1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .025" ± .002"; COPPER: 1/2 OZ. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
 2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
-  DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

