


This document contains proprietary information and such information may not be disclosed to others for any purposes,
not used for sales/marketing/procurement purposes without written permission

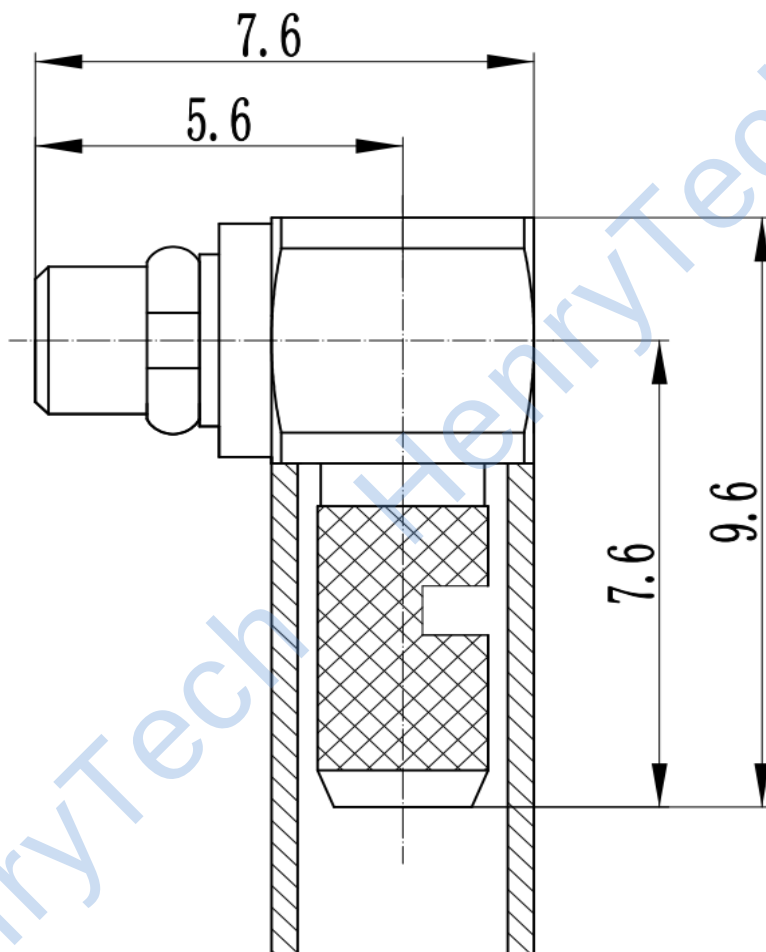

1 Electrical

- 1.1 Impedance: 50 Ω
- 1.2 Frequency: 0-6GHz
- 1.3 Working voltage: $\leq 170V$
- 1.4 Insulation resistance: $\geq 1000M\Omega$
- 1.5 Dielectric withstanding voltage: 500V
- 1.6 Center contact resistance $\leq 10m\Omega$
- 1.7 Outer contact resistance $\leq 5m\Omega$
- 1.8 VSWR: 1.30:1

2 Material&Finish

- 2.1 Inner Contact: Brass, gold plated
- 2.2 Outer Contact: brass,gold plated
- 2.3 Insulators: Teflon
- 2.4 C-ring: Beryllium-copper,gold plated

Notes:

- 1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE NOTICE AT ANY TIME
- 2. CUSTOMER OUTLINE DRAWING FOR REFERENCE ONLY

DRAWN: H.wei 19/03/17
ENGINEER: L.yu 19/03/17
APPROVED: W.yi 19/03/17
TOLERANCES UNLESS OTHERWISE SPECIFIED
X ± 0.50
.X ± 0.20
.XX ± 0.10
ANGLES $\pm 1^\circ$

TITLE:

RF Coaxial Connector
MMCX Male Right Angle
Conn. For RG316 cable

PART NO: HL-MMCX-JW3F



DIMENSION IN MILLIMETERS (mm)

SIZE: A4 SCALE: N/A SHEET: 1/1 REV: A