

**SERIES:** VWRAS2-SIP | **DESCRIPTION:** DC-DC CONVERTER


**FEATURES**

- 2 W isolated output
- wide input (2:1)
- industry standard 8 pin SIP package
- dual regulated outputs
- 1,500 V isolation
- short circuit protection
- wide temperature (-40~85°C)
- efficiency up to 79%



MODEL	input voltage		output voltage (Vdc)	output current		output power max (W)	ripple and noise <sup>1</sup> max (mVp-p)	efficiency typ (%)
	typ (Vdc)	range (Vdc)		min (mA)	max (mA)			
VWRAS2-D5-D5-SIP	5	4.5~9	±5	±20	±200	2	100	67
VWRAS2-D5-D9-SIP	5	4.5~9	±9	±11	±111	2	100	71
VWRAS2-D5-D12-SIP	5	4.5~9	±12	±8	±83	2	100	72
VWRAS2-D5-D15-SIP	5	4.5~9	±15	±7	±67	2	100	73
VWRAS2-D12-D5-SIP	12	9~18	±5	±20	±200	2	100	73
VWRAS2-D12-D9-SIP	12	9~18	±9	±11	±111	2	100	74
VWRAS2-D12-D12-SIP	12	9~18	±12	±8	±83	2	100	78
VWRAS2-D12-D15-SIP	12	9~18	±15	±7	±67	2	100	77
VWRAS2-D24-D5-SIP	24	18~36	±5	±20	±200	2	100	76
VWRAS2-D24-D9-SIP	24	18~36	±9	±11	±111	2	100	78
VWRAS2-D24-D12-SIP	24	18~36	±12	±8	±83	2	100	79
VWRAS2-D24-D15-SIP	24	18~36	±15	±7	±67	2	100	78
VWRAS2-D48-D5-SIP	48	36~72	±5	±20	±200	2	100	75
VWRAS2-D48-D9-SIP	48	36~72	±9	±11	±111	2	100	78
VWRAS2-D48-D12-SIP	48	36~72	±12	±8	±83	2	100	79
VWRAS2-D48-D15-SIP	48	36~72	±15	±7	±67	2	100	79

Notes: 1. ripple and noise are measured at 20 MHz BW

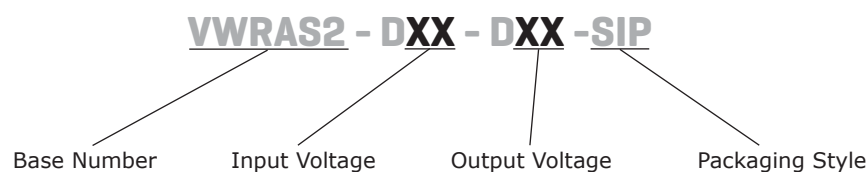**PART NUMBER KEY**


**INPUT**

parameter	conditions/description	min	typ	max	units
operating input voltage	5 V model	4.5	5	9.0	Vdc
	12 V model	9.0	12	18.0	Vdc
	24 V model	18.0	24	36.0	Vdc
	48 V model	36.0	48	72.0	Vdc

**OUTPUT**

parameter	conditions/description	min	typ	max	units
line regulation	input voltage from low to high		±0.2	±0.5	%
load regulation	measured from 10% load to full load		±0.5	±1.0	%
voltage accuracy	input voltage range refer to output load		±1	±3	%
switching frequency	100% load, input voltage range	180		500	kHz
temperature coefficient			±0.03		%/°C

**PROTECTIONS**

parameter	conditions/description	min	typ	max	units
short circuit protection	continuous				

**SAFETY AND COMPLIANCE**


parameter	conditions/description	min	typ	max	units
isolation voltage	for 1 minute at 1 mA max.	1,500			Vdc
isolation resistance	at 500 Vdc	1,000			MΩ
MTBF		1,000,000			hours
RoHS compliant	yes				

**ENVIRONMENTAL**

parameter	conditions/description	min	typ	max	units
operating temperature		-40		85	°C
storage temperature		-50		125	°C
storage humidity	non-condensing			95	%
temperature rise	at full load		15	35	°C
lead temperature	1.5 mm from case for 10 seconds			300	°C

## DERATING CURVES

1. output power vs. ambient temperature

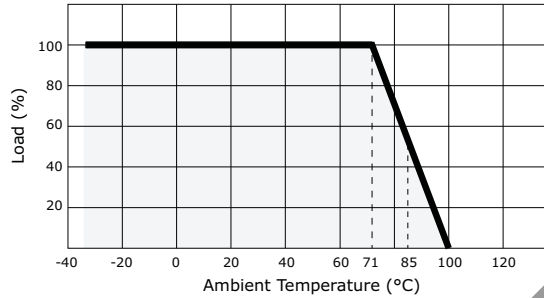


## MECHANICAL

parameter	conditions/description	min	typ	max	units
dimensions	0.866 x 0.374 x 0.472 (22.00 x 9.50 x 12.00 mm)				inch
case material	plastic (UL94-V0)				
weight			5.5		g

## MECHANICAL DRAWING

units: mm [inches]  
 tolerance:  $\pm 0.25$  [ $\pm 0.010$ ]  
 pin section tolerance:  $\pm 0.10$  mm [ $\pm 0.004$ ]

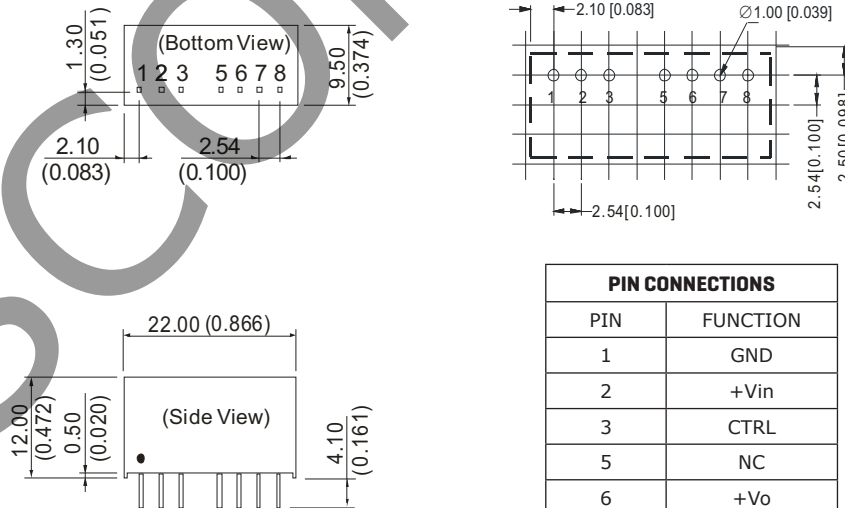

PIN CONNECTIONS	
PIN	FUNCTION
1	GND
2	+Vin
3	CTRL
5	NC
6	+Vo
7	0 V
8	-Vo

## APPLICATION NOTES


### 1. CTRL Terminal

When open or high impedance, the converter works well; When this pin is 'high', the converter shuts down; It should be noted that the input current ( $I_c$ ) should be between 5-10mA, exceeding the maximum 20mA will cause permanent damage to the converter. The value of R can be derived as follows:

$$R = \frac{V_C - V_D - 1.0}{I_c}$$

### Recommended Circuit

If you want to further decrease the input/output ripple, an "LC" filtering network may be connected to the input and output ends of the DC/DC converter, see (Figure 1).

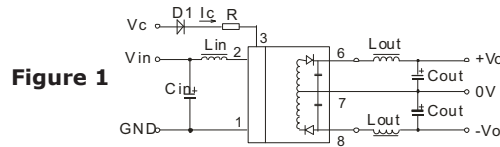

Vin (Vdc)	Cin (μF)	Lin (μH)	Cout (μF)	Lout (μH)
5	100	4.7~120	100	2.2~10
12	100	4.7~120	100	2.2~10
24	10~22	4.7~120	100	2.2~10
48	10~22	4.7~120	100	2.2~10

However, the capacitance of the output filter capacitor must be proper. If the capacitance is too big, a startup problem might arise. To ensure safe and reliable operation see Table 1 for the maximum capacitance of each channel of output.


Table 1

Vout (Vdc)	Cout (μF)
±5	560
±9	470
±12	330
±15	270

### 2. Input Current

While using an unstable power source, please ensure the output voltage and ripple voltage do not exceed indexes of the converter. The preceding power source must be able to provide for converter sufficient starting current  $I_p$ .

General:  $I_p \leq 1.4 * I_{in-max}$



### 3. No parallel connection or plug and play

Note: 1. All specifications measured at  $T_a = 25^\circ\text{C}$ , humidity <75%, nominal input voltage and rated output load unless otherwise specified.

## REVISION HISTORY

rev.	description	date
1.0	initial release	11/10/2010
1.01	new template applied	04/16/2012
1.02	V-Infinity branding removed	09/10/2012
1.03	updated recommended circuit table	02/19/2013
1.04	corrected input voltage range data, updated spec	08/22/2013

The revision history provided is for informational purposes only and is believed to be accurate.



**Headquarters**  
20050 SW 112th Ave.  
Tualatin, OR 97062  
**800.275.4899**

Fax 503.612.2383  
**cui.com**  
techsupport@cui.com

CUI offers a two (2) year limited warranty. Complete warranty information is listed on our website.

CUI reserves the right to make changes to the product at any time without notice. Information provided by CUI is believed to be accurate and reliable. However, no responsibility is assumed by CUI for its use, nor for any infringements of patents or other rights of third parties which may result from its use.

CUI products are not authorized or warranted for use as critical components in equipment that requires an extremely high level of reliability. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.