

N-Channel Enhancement Mode Field Effect Transistor

General Description

The CMN3402MA uses advanced trench technology to provide excellent RDS(ON), low gate charge and operation with gate voltages as low as 1.5V. This device is suitable for use as a load switch or in PWM applications.

Features

- RDS(ON)<45mΩ @ VGS=10V
- RDS(ON)<58mΩ @ VGS=4.5V
- Simple drive requirement
- Surface mount package

Product Summary


BVDSS	RDSON	ID		
30V	45mΩ	4A		

Applications

- PWM applications
- Load switch
- Power management
- PA Switch


SOT-23-3L Pin Configuration





SOT-23-3L

Type	Package	Marking			
CMN3402MA	SOT-23-3L	B2A			

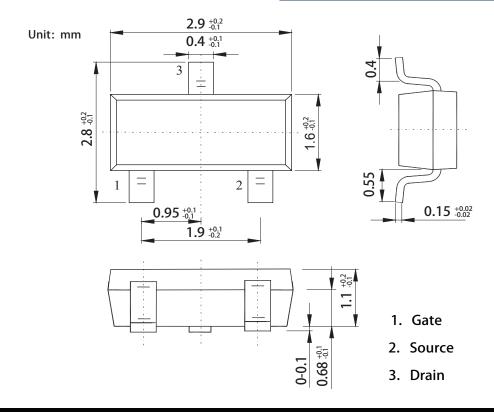



N-Channel Enhancement Mode Field Effect Transistor

Absolute Maximum Ratings

Symbol	Parameter	Rating	Units	
V _{DS}	Drain-Source Voltage	30	V	
V_{GS}	Gate-Source Voltage	±20	V	
I _D @T _A =25℃	Continuous Drain Current	ent 4		
I _{DM}	Pulsed Drain Current	12	А	
P _D @T _A =25℃	Total Power Dissipation	1.2	W	
T _{STG}	Storage Temperature Range -55 to 150		$^{\circ}$	
T_J	Operating Junction Temperature Range	-55 to 150	$^{\circ}$	

Thermal Data

Symbol	Parameter	Тур.	Max.	Unit	
$R_{ heta JA}$	Thermal Resistance Junction-ambient		100	°C/W	

Electrical Characteristics (T_J=25℃ , unless otherwise noted)

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V , I _D =250uA	30			V
P	Static Drain-Source On-Resistance	V_{GS} =10V, I_D =4A			45	mΩ
R _{DS(ON)}		V_{GS} =4.5 V , I_D =3 A			58	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{GS}=V_{DS}$, $I_D=250uA$	1		3	V
I _{DSS}	Drain-Source Leakage Current	V _{DS} =24V, V _{GS} =0V			1	uA
I _{GSS}	Gate-Source Leakage Current	V _{GS} = ±20V, V _{DS} =0V			±5	μA
gfs	Forward Transconductance	V _{DS} =4V , I _D =4A		4		S
Q_g	Total Gate Charge	I _D =3A		5		
Q_gs	Gate-Source Charge	V _{DS} =15V		0.6		nC
Q_{gd}	Gate-Drain Charge	V _{GS} =10V		1		
$T_{d(on)}$	Turn-On Delay Time	V _{DS} = 15V		3.3		
Tr	Rise Time	R _{GEN} =3Ω		3		ns
$T_{d(off)}$	Turn-Off Delay Time	V _{GS} =10V		16		115
T _f	Fall Time	RL=3.33Ω		2.3		
C _{iss}	Input Capacitance			260		
Coss	Output Capacitance	V _{DS} =15V , V _{GS} =0V , f=1MHz		35		pF
C _{rss}	Reverse Transfer Capacitance			20		

Diode Characteristics

Symbol	Parameter	Conditions	Min.	Тур.	Max.	Unit
V _{SD}	Diode Forward Voltage	V _{GS} =0V , I _S =1A			1	V

This product has been designed and qualified for the counsumer market.

Cmos assumes no liability for customers' product design or applications.

Cmos reserver the right to improve product design ,functions and reliability wihtout notice.