### STRADELLA-16-HB-W

~90° wide beam for industrial applications

### **SPECIFICATION:**

49.5 x 49.5 mm **Dimensions** Height 7.1 mm pin, screw Fastening **ROHS** compliant yes 🕕



### **MATERIALS:**

Type Material Colour **Finish** Component STRADELLA-16-HB-W Multi-lens **PMMA** clear

### **ORDERING INFORMATION:**


» Box size: 480 x 280 x 300 mm

Component Qty in box MOQ MPQ Box weight (kg)

C15432\_STRADELLA-16-HB-W 800 160 160 6.6




### **PRODUCT** C15432\_STRADELLA-16-HB-W

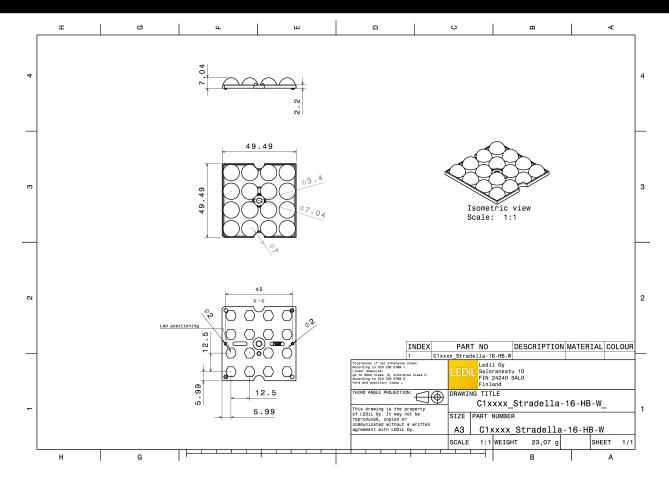


See also our general installation guide: <a href="www.ledil.com/installation\_guide">www.ledil.com/installation\_guide</a>



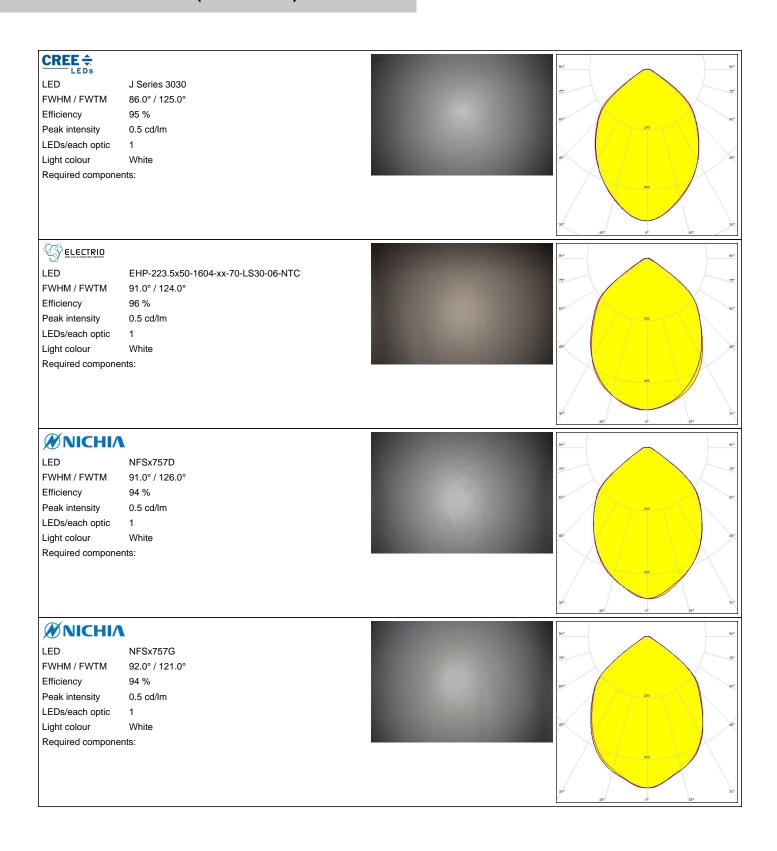




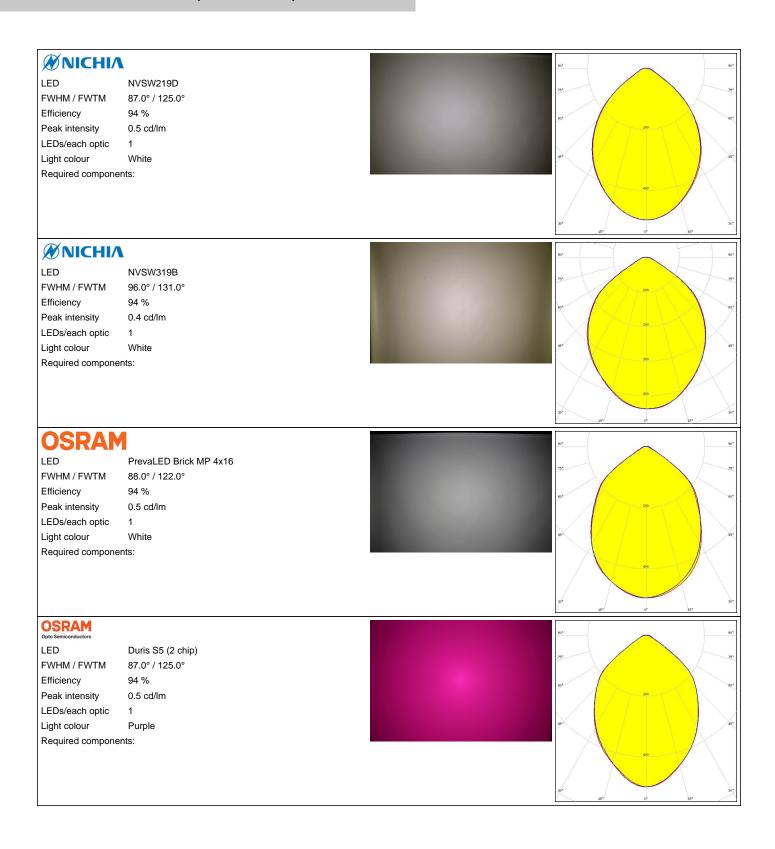

### **OPTICAL RESULTS (MEASURED):**

#### **OSRAM** LED Duris S5 (Single chip) FWHM / FWTM 88.0° / 125.0° Efficiency 93 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White Required components: **OSRAM** LED OSCONIQ S 3030 (QSLR31) FWHM / FWTM 84.0° / 124.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1

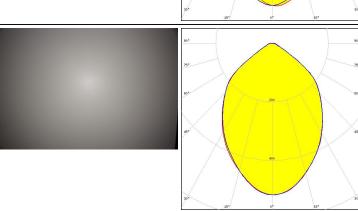

# LED Fortimo FastFlex LED 4x16 DHE G4 FWHM / FWTM 87.0° / 122.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White

HiLOM RM64 (LM301B)

88.0° / 123.0°

94 %

White

0.5 cd/lm

White

Light colour

Required components:

Required components:

**SAMSUNG** 

FWHM / FWTM


Peak intensity


Light colour

LEDs/each optic


Required components:

Efficiency

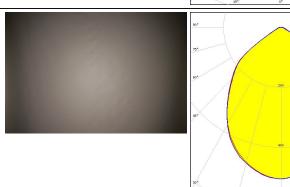


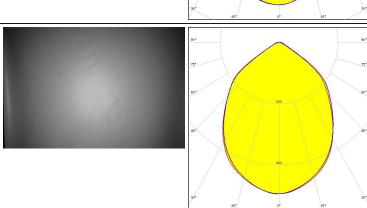




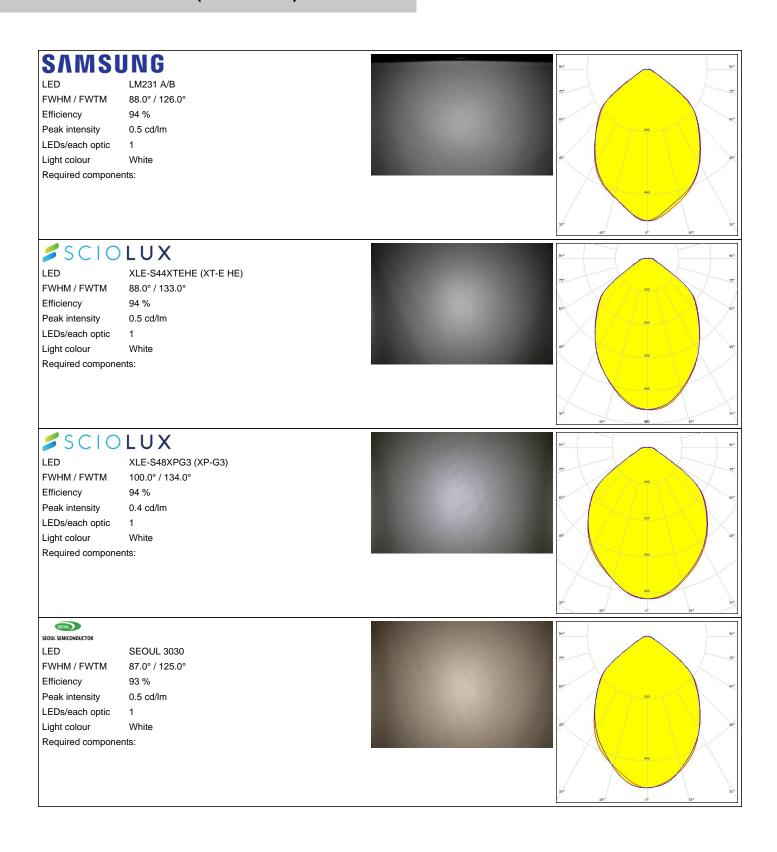



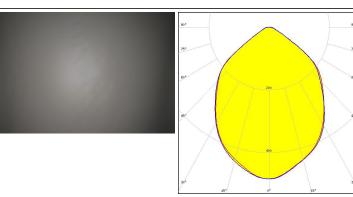




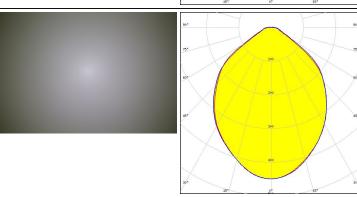

### TRIDONIC

LED RLE 4x16 4000lm MP ADV2 OTD

FWHM / FWTM 88.0° / 123.0°
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

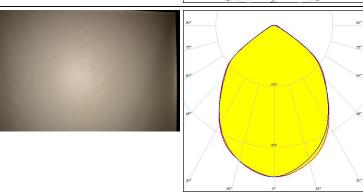

### **TRIDONIC**

LED RLE 4x8 2000lm MP ADV2 OTD

FWHM / FWTM 88.0° / 123.0°
Efficiency 94 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour White
Required components:

### **OPTICAL RESULTS (SIMULATED):**

bridgelux

LED CSP 2727 (BXCP)


White

 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 98.0° / 116.0° 96 %

Efficiency Peak intensity 0.5 cd/lm

LEDs/each optic

Required components:



bridgelux

Light colour

LED CSP 2727 (BXCP)

FWHM / FWTM 97.0° / 118.0°


Efficiency 87 % Peak intensity 0.4 cd/lm

LEDs/each optic 1

White Light colour

Required components:

Protective plate, glass



CREE \$

J Series 5050 Round LES LED


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 85.0° / 121.0°

Efficiency 96 % Peak intensity 0.6 cd/lm

LEDs/each optic 1

Light colour White

Required components:




CREE \$

XP-G2 HE FWHM / FWTM 91.0° / 128.0°

Efficiency 94 % Peak intensity 0.5 cd/lm

LEDs/each optic White Light colour

Required components:



### **OPTICAL RESULTS (SIMULATED):**



LED XT-E


 $\mathsf{FWHM}\,/\,\mathsf{FWTM}$ 99.0° / 126.0°

Efficiency 93 %

Peak intensity 0.4 cd/lm LEDs/each optic

Light colour White

Required components:



### **MUMILEDS**


LUXEON 5050 Square LES LED

FWHM / FWTM 83.0° / 121.0° Efficiency 96 % Peak intensity 0.6 cd/lm

LEDs/each optic 1

White Light colour

Required components:




### LUMILEDS

LUXEON HL1Z LED FWHM / FWTM 106.0° / 118.0°

Efficiency 95 %

Peak intensity 0.4 cd/lm LEDs/each optic 1

Light colour White Required components:



### **WNICHIA**


LED NVSW519A

FWHM / FWTM 99.0° / 126.0° Efficiency 93 %

Peak intensity 0.4 cd/lm LEDs/each optic

White Light colour

Required components:





LED NVSxE21A


FWHM / FWTM 98.0° / 121.0° Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:



### **OSRAM**

Opto Semiconductor

LED Duris E5

FWHM / FWTM 87.0° / 123.0° Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

OSRAM Opto Semiconductore

LED OSCONIQ C 2424


FWHM / FWTM 94.0° / 122.0°

Efficiency 96 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:



#### **OSRAM**

LED

OSCONIQ C 3030

FWHM / FWTM 90.0° / 120.0°


Efficiency 88 %
Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass




### **OSRAM**

LED OSCONIQ C 3030 FWHM / FWTM 92.0 + 90.0° / 120.0°


Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic Light colour White

Required components:



#### **OSRAM**

LED OSCONIQ P 3030 FWHM / FWTM 79.0° / 128.0° Efficiency 97 % Peak intensity 0.6 cd/lm LEDs/each optic 1 White Light colour Required components:




### OSRAM Opto Semiconductors

LED OSCONIQ P 3737 (3W version)

FWHM / FWTM 88.0 + 87.0° / 124.0°


Efficiency 96 % Peak intensity 0.5 cd/lm LEDs/each optic 1 Light colour White Required components:



### **OSRAM**

LED OSLON Square CSSRM2/CSSRM3

FWHM / FWTM 97.0° / 124.0° Efficiency 94 % Peak intensity 0.4 cd/lm LEDs/each optic 1 Red Light colour Required components:



### **OSRAM**


LED SFH 4715AS FWHM / FWTM 66.0° / 106.0°

Efficiency 96 %

Peak intensity 0.8 cd/lm

LEDs/each optic 1 Light colour IR

Required components:



### **SAMSUNG**

LED LH231B


FWHM / FWTM 92.0° / 118.0°

Efficiency 95 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1
Light colour White

Required components:



### **SAMSUNG**

LED LH231B

FWHM / FWTM 92.0° / 118.0°

Efficiency 87 %


Peak intensity 0.5 cd/lm

LEDs/each optic 1

Light colour White

Required components:

Protective plate, glass



### **SAMSUNG**

LED LH351C

FWHM / FWTM 97.0° / 124.0°


Efficiency 94 %

Peak intensity 0.5 cd/lm

Light colour White

Required components:

LEDs/each optic



### **OPTICAL RESULTS (SIMULATED):**

### **SAMSUNG**

LM301B

FWHM / FWTM 113.0° / 133.0°

Efficiency 96 %


Peak intensity 0.4 cd/lm

LEDs/each optic

Light colour White

Required components:

Protective plate, glass



### **SAMSUNG**

LED LM301B


FWHM / FWTM 90.0° / 125.0°

Efficiency 94 %

Peak intensity 0.5 cd/lm

LEDs/each optic 1 White Light colour

Required components:



### **SAMSUNG**

LED LM302D

FWHM / FWTM 90.0° / 124.0°


Efficiency 96 %

Peak intensity 0.5 cd/lm

LEDs/each optic Light colour

Required components:

1 White



#### SEOUL SEOUL SEMICONDUCTOR

LED SEOUL DC 3030C


FWHM / FWTM 91.0° / 124.0°

Efficiency 96 %

Peak intensity 0.5 cd/lm

LEDs/each optic

White Light colour Required components:








LEDs/each optic Light colour White


Required components:



SEOUL SEOUL SEMICONDUCTOR

LED Z8Y22T FWHM / FWTM 94.0° / 124.0° Efficiency 94 % Peak intensity 0.5 cd/lm LEDs/each optic 1 White Light colour

Required components:





#### **GENERAL INFORMATION:**

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### **MATERIALS:**

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

### **LEDIL Oy**

Joensuunkatu 13 FI-24240 SALO Finland

#### LEDiL Inc.

228 West Page Street Suite D Sycamore IL 60178 USA

### Ledil Optics Technology (Shenzhen) Co., Ltd.

# 405 , Block B Casic Motor Building Shenzhen 518057 P.R.CHINA

### Local sales and technical support

www.ledil.com/ where\_to\_buy

#### **Shipping locations**

Salo, Finland Hong Kong, China

#### **Distribution Partners**

15/15

www.ledil.com/ where\_to\_buy